
MERIDIAN CLASSICAL- 2/B
BOLLARD


divinity lights





divinity lights

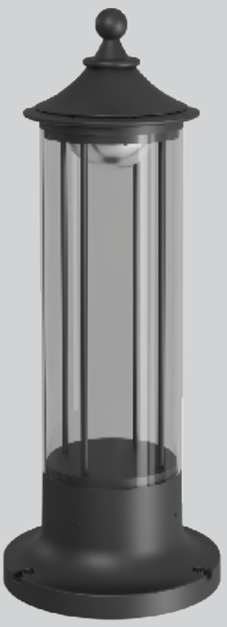







MERIDIAN CLASSICAL- 2/B

MERIDIAN Classical-2/B Bollard has :

- Luminaire housing of Aluminium
- IP66, High Ingress Protection against dust & moisture
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- Optimum for every outdoor space including society parks, streets, educational institutes, and pathways
- Garden & pathway luminaires create pleasant light distribution with a high degree of visual comfort
- LED bollard, designed to provide radially symmetric light emission of 360°
- Sustainable LED technology offers durability and optimal light output with low power consumption

Quick Info

CRI ≥ 80

2700K/ 3000K/ 4000K

Tuneable (2700-5000K)

RGBW

1000 lumen

IP66/IK10

Non Dimmable/ Dali Dimmable/ DMX

SDCM<3

Clear Glass


L70 @50,000h


DAluminium

Types

Surface

Single Line Diagram

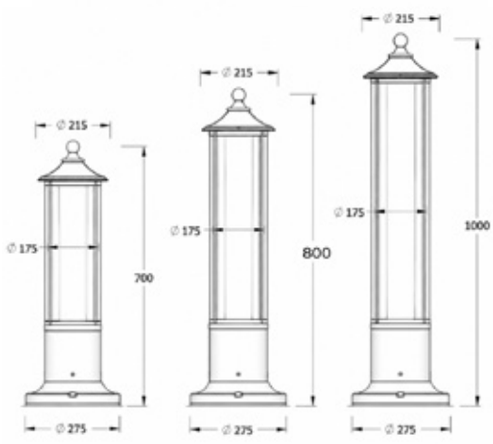




CRI ≥ 80

divinity lights

MERIDIAN CLASSICAL- 2/B



System Power	Dimensions
15W	Top Dia= 215mm, Base Dia= 275mm, H= 700mm
20W	Top Dia= 215mm, Base Dia= 275mm, H= 800mm
25W	Top Dia= 215mm, Base Dia= 275mm, H= 1000mm

Order Options

CCT (Color Temperature)

2700K

3000K

4000K

Tuneable (2700-5000K)

RGBW

CRI

>80

Beam Angle

360°

Control

Non-Dimmable

Dali- Dimmable



Mounting Type

Surface

Material Color

RAL Code As Per Request