


MICRO SHRUB +TREE UP LIGHT

Spike Mounted

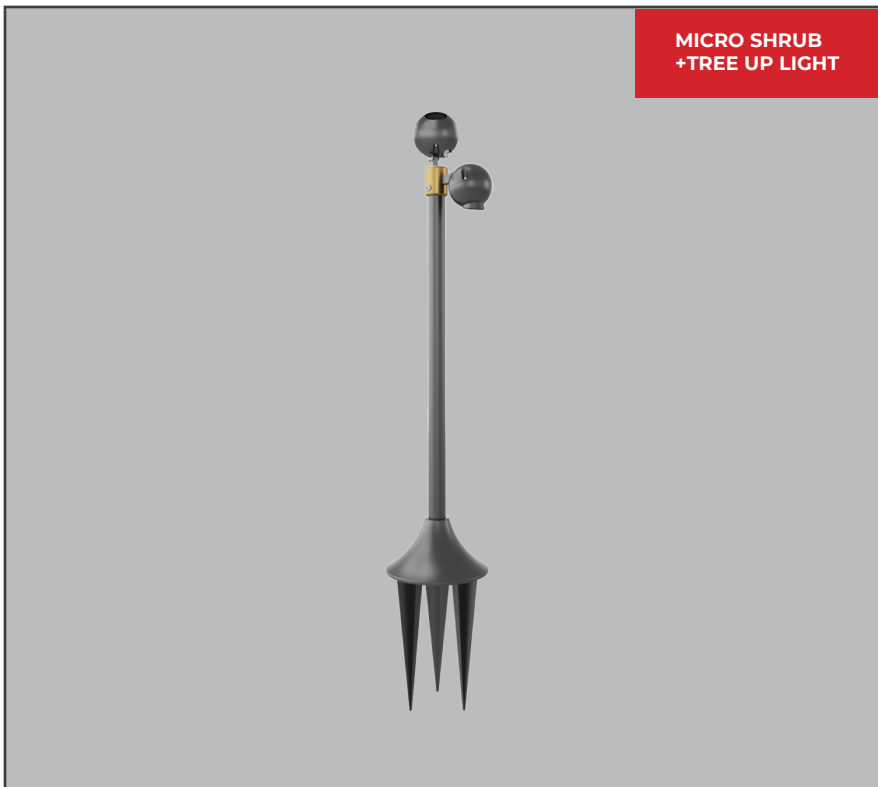

MICRO SHRUB+TREE UP LIGHT is a compact outdoor LED flood luminaire in a round aluminum housing with a premium powder-coated finish.


Powered by high-quality LEDs with a binning tolerance of ≤ 3 SDCM and $\text{CRI} \geq 90$, the luminaire maintains at least 70% of its luminous flux after 50,000 operating hours, ensuring long-term performance and reliability. The integrated lens optic delivers a precise beam with $15^\circ / 25^\circ / 35^\circ / 45^\circ / 60^\circ$ options for uniform illumination and reduced glare.

With a compact size of 60mm Dia and 500mm height, this fixture is crafted for direct surface-mounted light distribution, making it ideal for landscape, façade, and architectural highlighting.

Customisations in RAL finish, CCT (2700K–4000K), wattages, and control options including DALI and non-dimmable versions are available upon request to enhance installation and performance flexibility.

Single Line Diagram

Spike Mounted

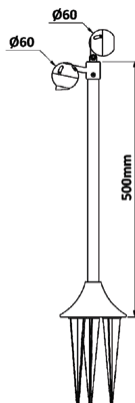

MICRO SHRUB + TREE UP LIGHT



Quick Info

Mounting Type

Spike Mounted

Material Colour

Customize RAL available

Protection mode

IP66

Driver Details

Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 2700K/ 3000K/ 4000K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

$15^\circ / 25^\circ / 35^\circ / 45^\circ / 60^\circ$

Optics

Lens

Efficacy

2700K- 85.2lm/W

3000K- 90.3lm/W

4000K- 95.7lm/W

Electrical

Wattage - 5W + 5W

Input Voltage- 240V AC

Physical Dimensions

Dia- 60mm

Height- 500mm