

MINMID SPIKE LIGHT

divinitylights





MINMID SPIKE LIGHT

The Z Ball Minmid spike light :

- Luminaire housing of Die-Cast Aluminium
- IP66, High Ingress Protection against dust & moisture
- The built quality ensures long and maintenance free service life
- High lumen light for landscape applications
- Powerful and precise optics
- Energy-efficient LED with high colour rendering
- Extremely robust construction, precise optics and beautiful form factor

Quick Info

CRI ≥ 90

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Lens


L70 @50,000h

Aluminium Die-Cast


Types

Spike Mounted

Single Line Diagram

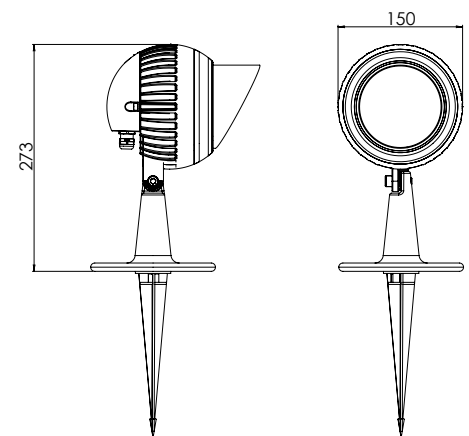

Light Distribution



CRI ≥ 90

MINMID SPIKE LIGHT



Product Order Code	System Power	Dimensions
1515	40W	Dia=150mm, H=273mm

Order Options

CCT (Colour Temperature)

- 2700K
- 3000K
- 4000K

CRI
>90

Beam Angle

- Narrow
- Medium
- Wide

Control

- Non-Dimmable
- Dali-Dimmable



Mounting Type

- Spike Mounted

Material Colour

- Black
- Grey