

## MINI SPIKE LIGHT

### Spike Mounted



**MINI SPIKE LIGHT** is a compact outdoor LED flood luminaire in a round aluminium housing with a premium powder-coated finish.

Powered by high-quality LEDs with a binning tolerance of  $\leq 3$  SDCM and CRI  $\geq 80$ , the luminaire maintains at least 70% of its luminous flux after 50,000 operating hours, ensuring long-term performance and reliability. The integrated lens optic delivers a precise beam with 5°/ 25°/ 35°/ 45°/ 60° options for uniform illumination and reduced glare.



With a compact size of 90mm length and 180mm height, this fixture is crafted for direct light distribution, making it ideal for professional application.

Customisations in RAL finish, CCT (2700K–4000K), wattages, and control options including DALI and non-dimmable versions are available upon request to enhance installation and performance flexibility.

### Single Line Diagram

Spike Mounted

### ACCESSORIES

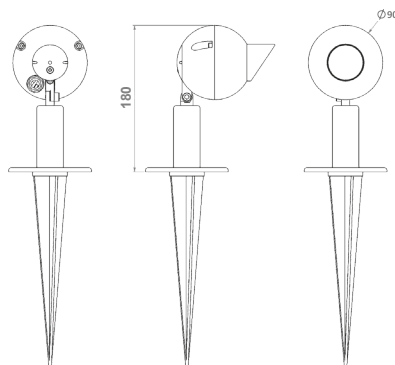

## MINI SPIKE LIGHT



## Quick Info

### Mounting Type

Spike Mounted

### Material Colour

Customize RAL available

### Protection mode

IP66

### Driver Details

Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- <10%

UGR - <19

### LED

CCT- 2700K/ 3000K/ 4000K

CRI-  $\geq 80$

Life Span - L70@50000h

MacAdam -  $\leq 3$  SDCM

### Beam Angle

15°/ 25°/ 35°/ 45°/ 60°

### Optics

Lens

### Efficacy

2700K- 85.2lm/W

3000K- 90.3lm/W

4000K- 95.7lm/W

### Electrical

Wattage - 10W

Input Voltage- 240V AC

### Physical Dimensions

Length- 90mm

Height- 180mm