

**MINMID
CATENARY LIGHT**

divinitylights



Quick Info

CRI ≥ 90

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Lens



L70 @50,000h

Aluminium Die-Cast

Types

Catenary

Single Line Diagram

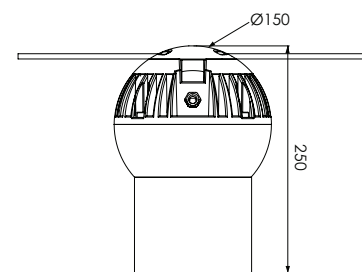


MINMID CATENARY LIGHT

Minmid Catenary Light has:

- Luminaire housing of die cast- aluminium
- Catenary Mounted
- fixture is available in three different colour options.
 - a) Monocolour
 - b) RGB
 - c) Monocolour with decorative colourful polycarbonate shade.
- Multiple options of antiglare and decorative
- Zero multiple shadows
- Various beam angle range from 5° (Narrow) to 90° (Wide Beam)
- LED with effective colour rendering
- Interpretation of the real environment light
- Finned heat sinks to dissipate heat and increase performance

Light Distribution



CRI ≥ 90

MINMID CATENARY LIGHT



Product Order Code	System Power	Dimensions
1517	40W	Dia=150mm, With Snoot H=250mm

Order Options

CCT (Colour Temperature)

2700K
3000K
4000K

CRI

>90

Beam Angle

Narrow
Medium
Wide

Control

Non-Dimmable
Dali-Dimmable



Mounting Type

Catenary

Material Colour

Black
Grey



ACCESSORIES

