



MINMID FLOOD LIGHT

divinitylights





MINMID FLOOD LIGHT

Minmid flood Light has:

- Multiple attachments for glare control
- Symmetric and asymmetric beam options for all applications
- Luminaire housing of Die-Cast Aluminium
- IP66, High Ingress Protection against dust & Moisture
- Innovative proprietary designed bracket without any attachment on a round, square or octagonal pole
- Available from 5000 lumens to 10000 lumens
- Energy-efficient LED with high colour rendering
- Extremely robust construction, precise optics and beautiful form factor
- Mono, RGB and RGBW colour options

Quick Info

CRI ≥ 90

2700K, 3000K, 4000K, RGBW

Non-Dimmable/ Dali-Dimmable

SDCM<3

Lens


L70 @50,000h

Aluminium Die-Cast


Types

Surface

Single Line Diagram

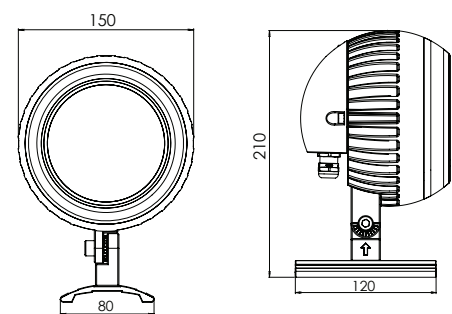

Light Distribution



CRI ≥ 90

MINMID FLOOD LIGHT



Product Order Code	System Power	Dimensions
1514	40W	Dia=150mm H=210mm

Order Options

CCT (Colour Temperature)

2700K
3000K
4000K
RGBW

CRI

>90

Beam Angle

Narrow
Medium
Wide

Control

Non-Dimmable
Dali-Dimmable



Mounting Type

Surface

Material Colour

Black
Grey

