

MIST-40
SPIKE LIGHT




divinity lights



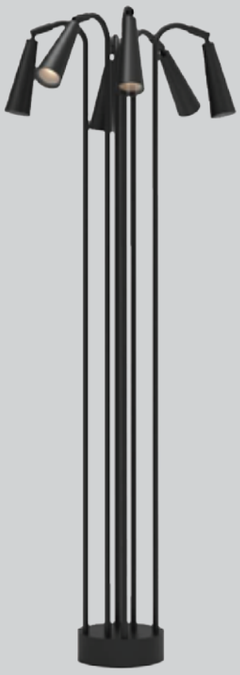

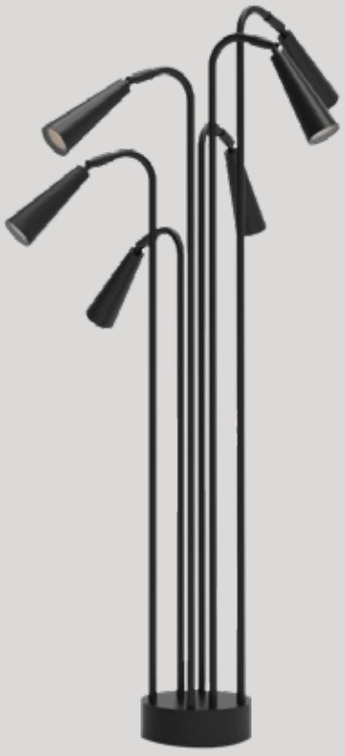





MIST-40

Mist-40 Bollard Light has:

· Luminaire housing of Aluminium

· IP66, High Ingress Protection against dust & moisture

· Flicker free operation for eye protection

· Energy-ef ficient LED with high colour rendering

· The built quality ensures long and maintenance free service life

· Optimum for every outdoor space including society parks, streets, educational insti tutes, and pathways -

· Garden & pathway luminaires create pleasant light distribution with a high degree of visual comfort

· Designed to provide radially symmetric beam angle

· Sustainable LED technology offers durability and optimal light output with low power consumption

divinity lights

Quick Info

CRI ≥ 80

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Tempered Glass


L70 @50,000h


Aluminium Die-Cast

Type

Surface

Single Line Diagram

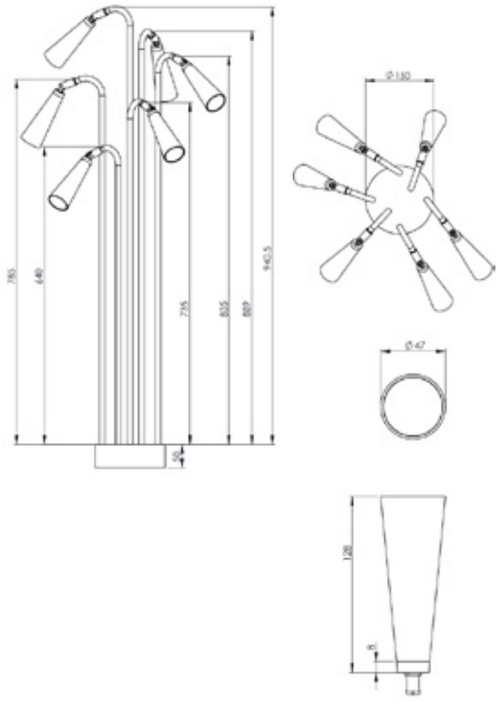




CRI ≥ 80

divinity lights

MIST-40



System Power	Dimensions
5W each	Light Dia= 47mm, Light H= 128mm, Base Dia- 150mm, Overall H- 940.5

Order Options

CCT (Color Temperature)

2700K

3000K

4000K

CRI

>80

Beam Angle

NA

Control

Non-Dimmable

Dali- Dimmable



Mounting Type

Surface

Material Color

RAL code as per request