

MIDI FLOOD LIGHT

Midi Flood Light has:

- Multiple attachments for glare control
- Symmetric and asymmetric beam options for all applications
- Luminaire housing of Die-Cast Aluminium
- IP66, High Ingress Protection against dust & Moisture
- Innovative proprietary designed bracket without any attachment on a round, square or octagonal pole
- Available from 5000 lumens to 10000 lumens
- Energy-efficient LED with high colour rendering
- Extremely robust construction, precise optics and beautiful form factor
- Mono, RGB and RGBW colour options

Quick Info

CRI $\geq 80/90$

2700K, 3000K, 4000K

Up to 85 lm/W

Non-Dimmable/ Dali-Dimmable

SDCM ≤ 3

Lens


L70 @50,000h

Aluminium Die-Cast


Types

Surface

Single Line Diagram

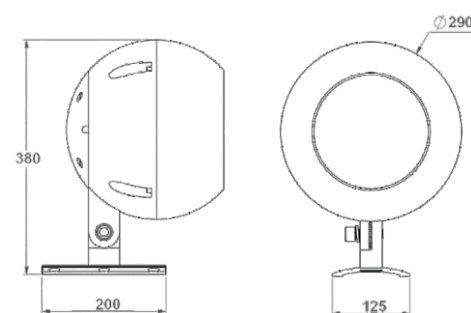

Light Distribution



CRI $\geq 80/90$

MIDI FLOOD LIGHT



Product Order Code	System Power	Dimensions
1518	100W	Dia=290mm H=380mm

Order Options

CCT (Colour Temperature)

2700K

3000K

4000K

CRI

>80

>90

Beam Angle

Narrow

Medium

Wide

Control

Non-Dimmable



Dali-Dimmable



Mounting Type

Surface

Material Colour

Black



Grey

