



Quick Info

CRI $\geq 80/90$

2700K, 3000K, 4000K

Up to 85 lm/W

Non-Dimmable/ Dali-Dimmable

SDCM ≤ 3

Lens


L70 @50,000h

Aluminium Die-Cast

Types

Spike Mounted

Single Line Diagram

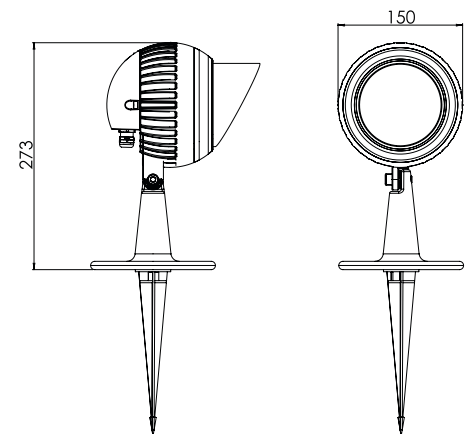


MINMID SPIKE LIGHT

The Z Ball Minmid spike light :

- Luminaire housing of Die-Cast Aluminium
- IP66, High Ingress Protection against dust & moisture
- The built quality ensures long and maintenance free service life
- High lumen light for landscape applications
- Powerful and precise optics
- Energy-efficient LED with high colour rendering
- Extremely robust construction, precise optics and beautiful form factor

Light Distribution



CRI $\geq 80/90$

MINMID SPIKE LIGHT



Product Order Code	System Power	Dimensions
1515	40W	Dia=150mm, H=273mm

Order Options

CCT (Colour Temperature)

2700K

3000K

4000K

CRI

>80

>90

Beam Angle

Narrow

Medium

Wide

Control

Non-Dimmable



Dali-Dimmable



Mounting Type

Spike Mounted

Material Colour

Black



Grey

