NIRVI EN 2425

ENCUPSULATED LINEAR LIGHT

Direct | Recessed




NIRVI EN-2425 is a versatile encapsulated linear lighting solution designed to provide seamless, uniform and dot-free illumination for both indoor and outdoor architectural applications. Featuring a premium extruded aluminium housing with high-grade silicone encapsulation, the fixture combines a durable construction with a clean and contemporary appearance. Its encapsulated design protects the LEDs and optics from dust and environmental factors while reducing light spill and delivering consistent illumination. The sealed construction also helps minimize maintenance requirements while providing bright and energy-efficient lighting with low power consumption.

With its seamless encapsulated construction and uniform light distribution, NIRVI EN-2425 is suitable for cove lighting, ceilings, walls, architectural profiles, furniture, niches, façade details, commercial interiors, residential spaces and outdoor architectural applications. Its flexible linear form allows clean integration into different design elements while maintaining consistent illumination and reliable performance.

Divinity Lights manufactures customized lighting solutions according to clients' specific requirements, making NIRVI EN-2425 suitable for tailored architectural and decorative lighting projects.

Single Line Diagram

Recessed

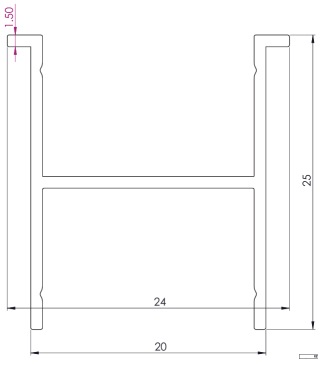

NIRVI EN 2425

INPUT VOLTAGE 24V DC | IP65 | CRI >80

Quick Info

Mounting Type
Recessed

Material Colour
Customize RAL available

Protection mode
IP65

Driver Details
Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED
CCT- 2400K/ 2700K/ 3000K

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - <3 SDCM

Beam Angle
120°

Optics
Potted Diffuser

Efficacy
80lm/W

Electrical
Wattage - 5W/Mtr

Input Voltage- 24V DC

Physical Dimensions
Length- 1000mm

Width- 24mm

Height- 25mm

divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

www.divinitylights.com