


# ONYX T145 DUO DIFFUSER

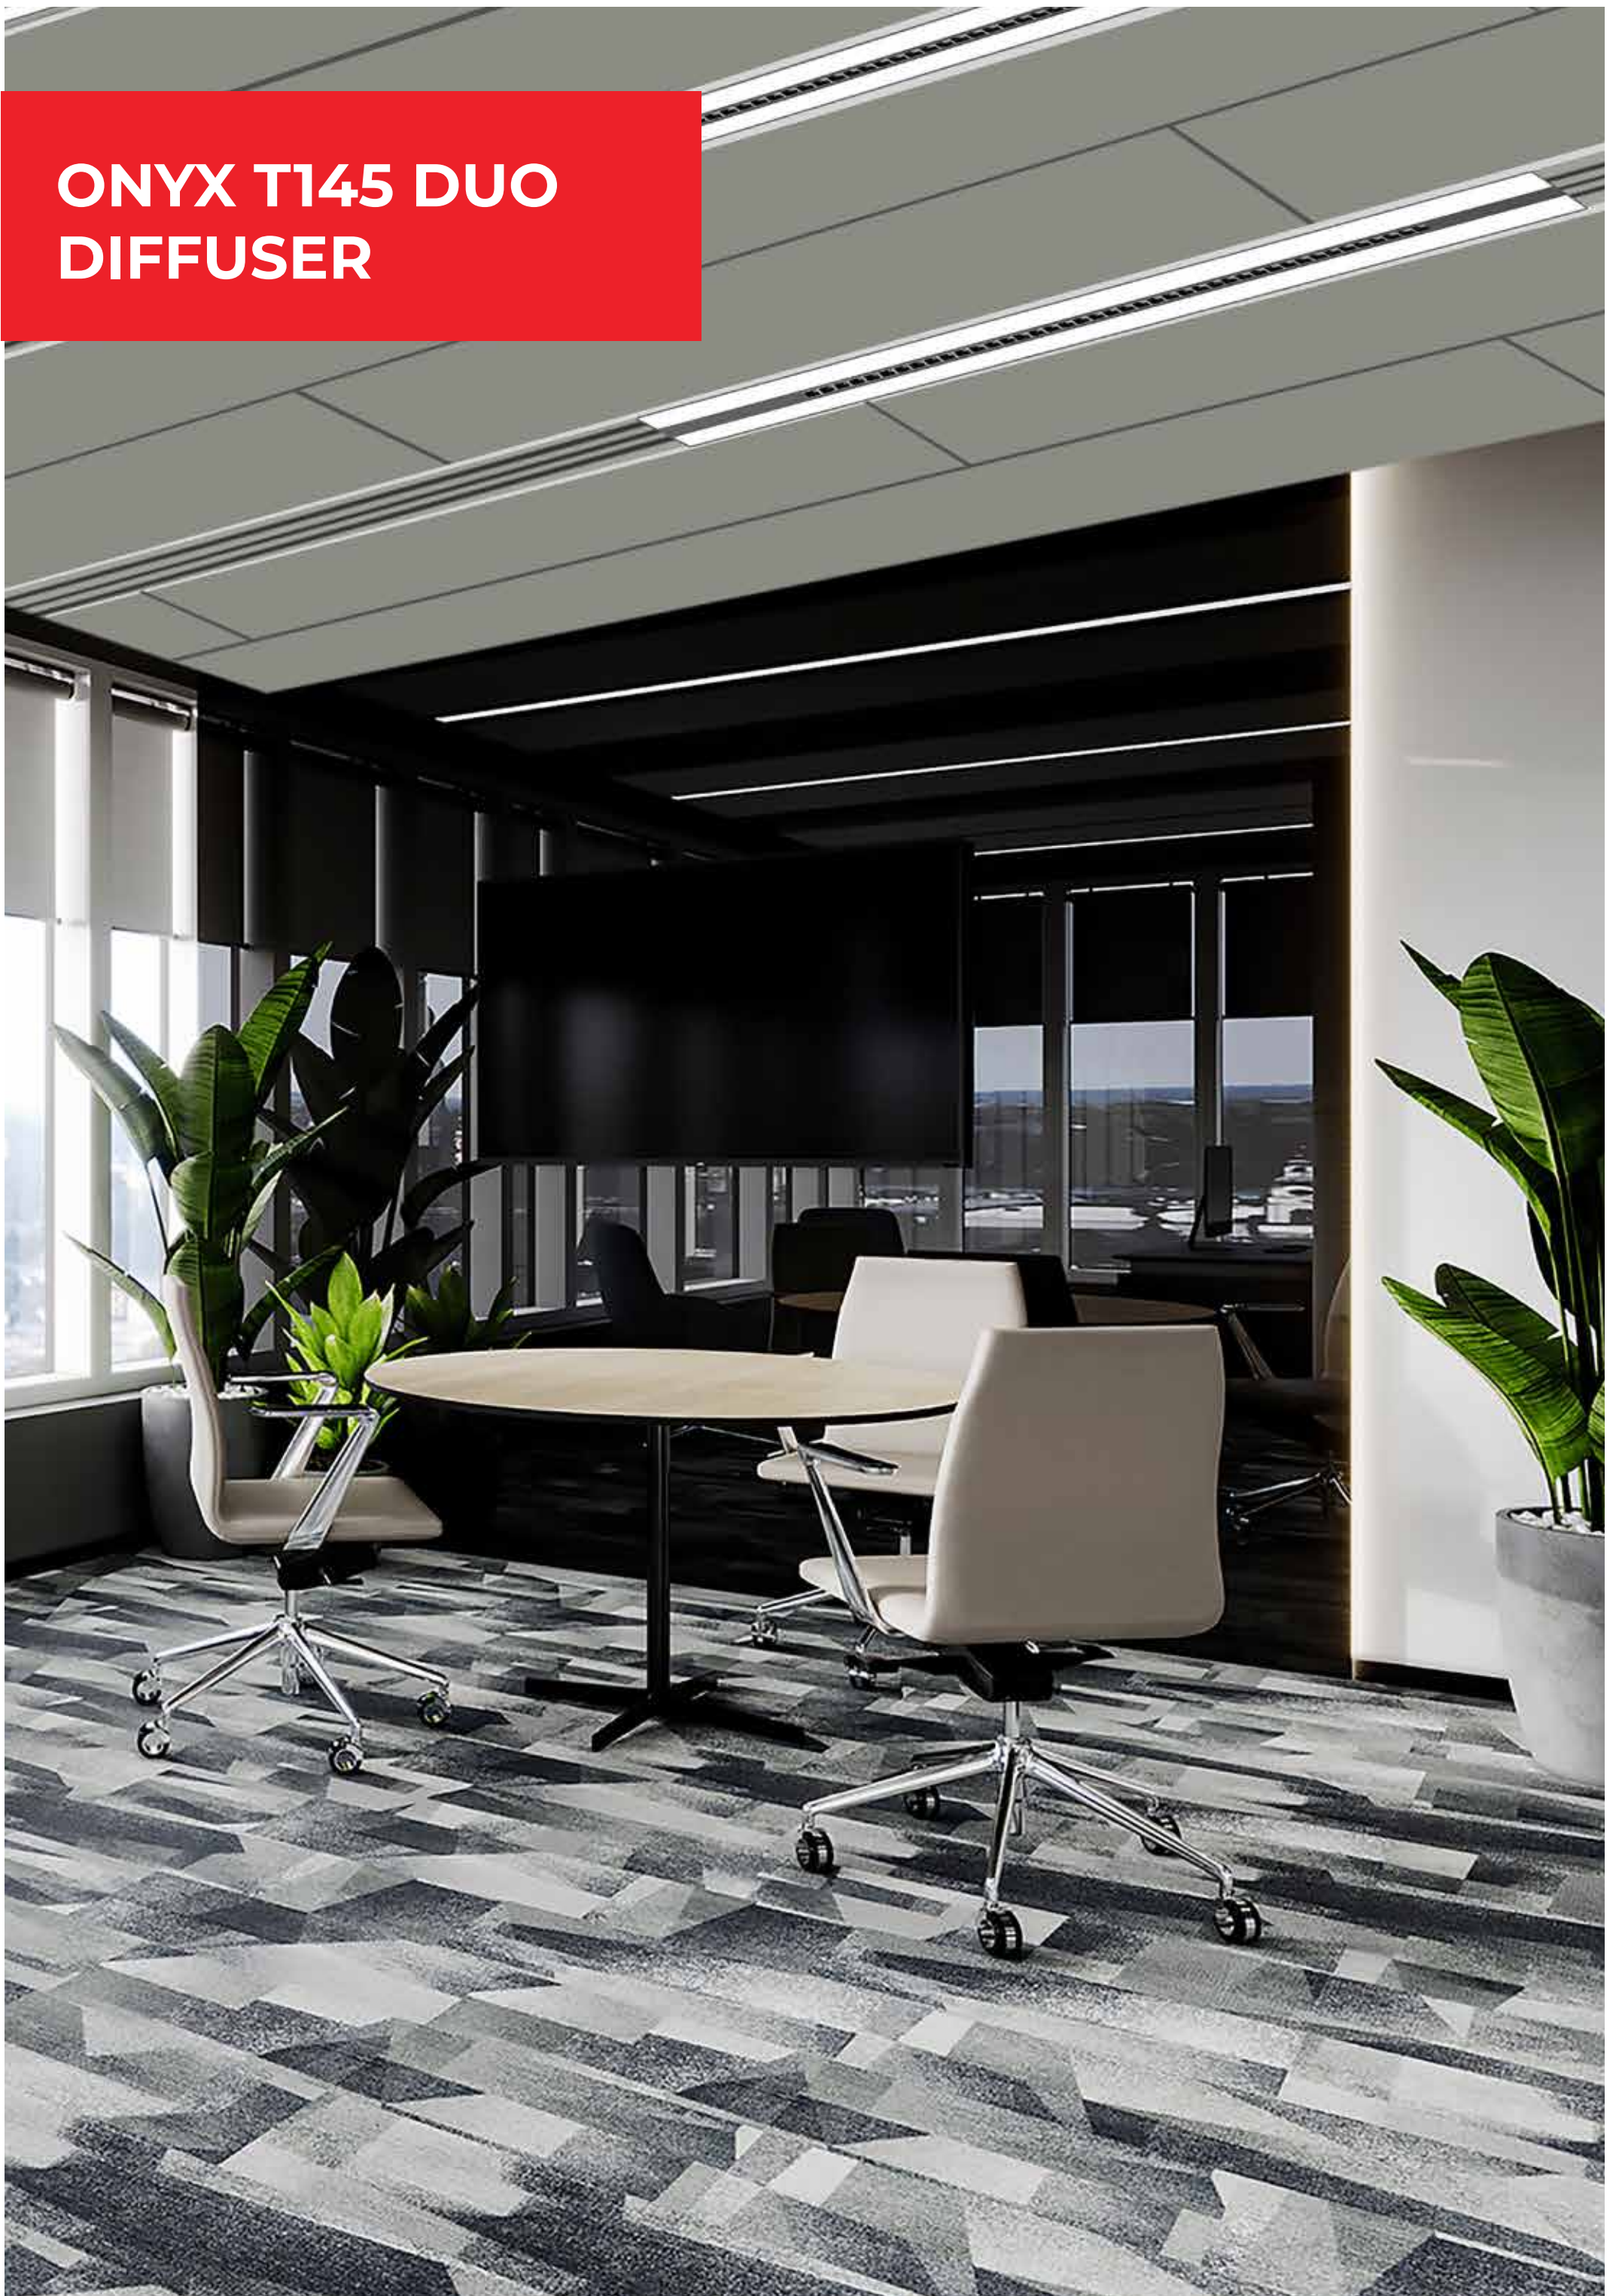

**divinity lights**

#### Quick Info

CRI  $\geq 90$

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM $<3$

L70 @50,000h

Lens + Micro Prismatic Diffuser




Aluminium

#### Types

Recessed with Frame in GYPSUM Ceiling

Recessed in T-Bar Techzone Ceiling

#### Single Line Diagram

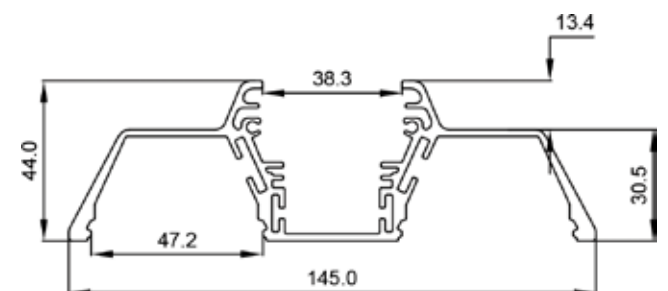

## ONYX T145 DUO DIFFUSER

This light features has:


- Luminaire housing of extruded aluminium
- Surface powder coated
- Snap-fit system and no visible screw
- Bottom opening for easy maintenance
- LED PCB mounted on insert design with heat sink
- Pendant with cable suspension
- M6 bolt for M6 fastener
- Lens + Prismatic double diffuser
- Energy-efficient LED with color rendering
- Glare control with Uniform illumination

#### Color



#### Light Distribution

Direct



CRI  $\geq 90$



TUNABLE  
WHITE

ONYX T145 DUO DIFFUSER



ONYX T145 DUO DIFFUSER

| Product Order Code                                                                         | System Power | Dimension       |
|--------------------------------------------------------------------------------------------|--------------|-----------------|
| 10114-  1 | 30W          | W=145mm, H=44mm |
| 10114-  2 | 45W          | W=145mm, H=44mm |

Order Options

| CCT (Colour Temperature) |   |
|--------------------------|---|
| 3000K                    | 1 |
| 4000K                    | 2 |
| 5700K                    | 3 |
| TUNABLE 2700K-6700K      | 4 |

| CRI |   |
|-----|---|
| >90 | 1 |

Beam Angle

110°

| Control               |   |
|-----------------------|---|
| ON-OFF                | 1 |
| ON-OFF (FLICKER FREE) | 2 |
| DALI-2 DT6            | 3 |
| DALI-2 DT8            | 4 |
| DALI+                 | 5 |

Mounting

RECESSED

Material Colour

|       |                                                                                       |   |
|-------|---------------------------------------------------------------------------------------|---|
| Black |  | 1 |
| White |  | 2 |
| Grey  |  | 3 |

Accessories

| Product Order Code                                                                         | Accessories Name         | Accessories Image                                                                    |
|--------------------------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------------------------------|
| 10113-  1 | LED PCB                  |    |
| 10113-2                                                                                    | Suspension Wire          |    |
| 10113-3                                                                                    | 24° Lens                 |   |
| 10113-4                                                                                    | 50° Lens                 |  |
| 10113-5                                                                                    | 50°X50° Lens             |  |
| 10113-6                                                                                    | PMMA Diffuser            |  |
| 10113-7                                                                                    | Micro Prismatic Diffuser |  |
| 10113-8                                                                                    | Profile Connector        |  |
| 10113-9                                                                                    | Profile Endcap           |  |

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



1

2

3

4

CRI

>90



1

Material Colour

Black

White

Grey







1

2

3