P2 2340
WALL GRAZER
Direct | Surface



P2 2340 WALL GRAZER Luminaire in a sleek linear design with a durable aluminium housing and premium powder coating finish, developed for direct surface-mounted architectural lighting applications.


Powered by high-quality LEDs with a binning tolerance of ≤ 3 SDCM and CRI ≥ 80, the luminaire maintains at least 70% of its luminous flux after 50,000 operating hours, ensuring reliable long-term performance. High-efficiency optics with tempered glass deliver a precise 45° beam angle for effective and uniform illumination.

With a standard size of 1000mm length, 23.3mm width, and 40.3mm height, this fixture is designed for precise light distribution. With IP66 protection, it is suitable for professional indoor and outdoor architectural applications.

Customisations in RAL finish, wattage, and length are available as per project requirements, providing flexibility for different installation conditions and lighting applications. Divinity Lights offers customised lighting solutions according to specific client requirements.

Single Line Diagram

Surface Mounted

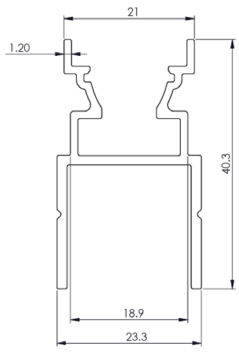

P2 2340 WALL GRAZER

INPUT VOLTAGE 240V DC | IP66 | CRI >80

Quick Info

Mounting Type
Surface

Material Colour
Customize RAL available

Protection mode
IP66

Driver Details
Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED
CCT- 2700K, 3000K, 4000K

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤3 SDCM

Beam Angle
45°

Optics
Lens with Tempered Glass

Efficacy
70lm/W

Electrical
Wattage - 15W/Mtr

Input Voltage- 24V DC

Physical Dimensions
Length- 1000mm

Width - 23.3mm

Height- 40.3mm

divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

www.divinitylights.com