


PANAROMIC- S 185
FLOOD LIGHT

divinity lights





PANAROMIC- S 185

Panaromic- S 185 Flood light has :

- Luminaire housing of Die-Cast Aluminium
- 15°, 24°, 35°, 60° beam options for all applications
- IP65, High Ingress Protection against dust & Moisture
- Available from 5000 lumens to 10000 lumens
- Energy-efficient LED with high colour rendering
- Extremely robust construction, precise optics and beautiful form factor
- Mono, and RGBW colour options

Quick Info

CRI ≥ 80

2700K, 3000K, 4000K

80 lm/W

Non-Dimmable/ Dali-Dimmable

SDCM<3

Lens with Tempered Glass




L70 @50,000h

Aluminium Die-Cast

Types

Surface

Single Line Diagram

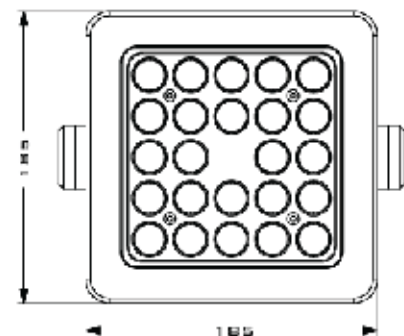

CRI ≥ 80

PANAROMIC- S 185



System Power	Dimensions
35W	LXW= 185X185mm, Overall Height= 191.35mm

Order Options

CCT (Colour Temperature)

- 2700K
- 3000K
- 4000K

CRI

- >80

Beam Angle

- 15°
- 24°
- 35°
- 60°

Control

- Non Dimmable
- Dali Dimmable

Mounting Type

- Surface

Material Colour

- RAL as per request