

PANAROMIC-S 220 FLOOD LIGHT

Direct | Surface

PANAROMIC-S 220 FLOOD LIGHT



PANAROMIC-S 220 Flood Light is a compact outdoor LED flood luminaire in a robust aluminum housing with a premium powder-coated finish.


Powered by high-quality LEDs with a binning tolerance of ≤ 3 SDCM and $\text{CRI} \geq 80$, the luminaire maintains at least 70% of its luminous flux after 50,000 operating hours, ensuring long-term performance and reliability. The integrated lens with tempered glass optic delivers precise beam distribution with 15°/ 24°/ 35°, and 60° beam angle options for controlled illumination and reduced glare.

With a compact size of 220mm length, 220mm width, and 211.2mm overall height, this IP65-rated fixture is crafted for direct surface-mounted light distribution, making it ideal for landscape, façade, architectural, and outdoor highlighting applications.

Customisations in RAL finish, CCT (2700K–4000K), wattage, and control options including DALI and non-dimmable versions are available upon request to enhance installation and performance flexibility.

Single Line Diagram

Surface Mounted

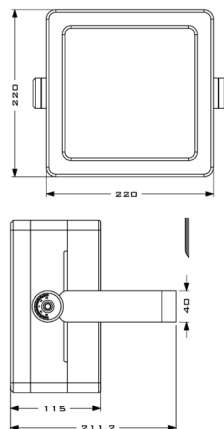

PANAROMIC-S 220 FLOOD LIGHT



Quick Info

Mounting Type

Surface Mounted

Material Colour

Customize RAL available

Protection mode

IP65

Driver Details

Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 2700K/ 3000K/ 4000K

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

15°/ 24°/ 35°/ 60°

Optics

Lens with Tempered Glass

Efficacy

2700K- 80.1lm/W

3000K- 85.5lm/W

4000K- 90.1lm/W

Electrical

Wattage - 60W

Input Voltage- 240V AC

Physical Dimensions

Length- 220mm

Width- 220mm

Overall Height- 211.2mm