

PHOENIX DOWNLIGHTER




Quick Info

CRI ≥90
3000K/ 4000K/ 5700K
Tunable white (2700K-6500K)
ON-OFF/ON-OFF (FLICKER FREE)
DALI-2 DT6 / DALI-2 DT8/ DALI+
SDCM<3
Lens
L70 @50,000h
Aluminium Die-cast

Type

Surface

Single Line Diagram

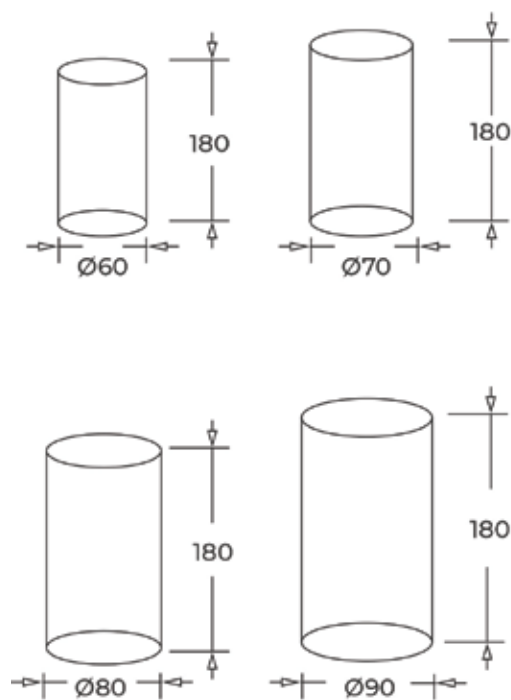

PHOENIX DOWNLIGHTER


Phoenix Downlighter fixture has:

- Surface mounted cylindrical COB downlight
- Die cast- aluminium Luminaire housing
- Die cast heat sink
- Premium powder coated finish
- COB (Chip on Board) technology
- LED with effective colour rendering
- Efficient lens & reflector for uniform light distribution
- Vivid & accurate lighting effect
- Suitable for retail, hospitality & residential application

Light Distribution



DIRECT



CRI ≥ 90



TUNABLE WHITE

PHOENIX DOWNLIGHTER



PHOENIX DOWNLIGHTER

System Power	Dimension
10W	Dia- 60mm Height- 180mm
20W	Dia- 70mm Height- 180mm
30W	Dia- 80mm Height- 180mm
40W	Dia- 90mm Height- 180mm

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



CRI

>90

Beam Angle

15°

23°

38°

55°

Control

ON-OFF



ON-OFF (FLICKER FREE)



DALI-2 DT6



DALI-2 DT8



DALI+



Mounting

Surface

Material Colour

RAL As Per Request