


divinity lights

**PHONEIX TRACK
WALLWASHER**

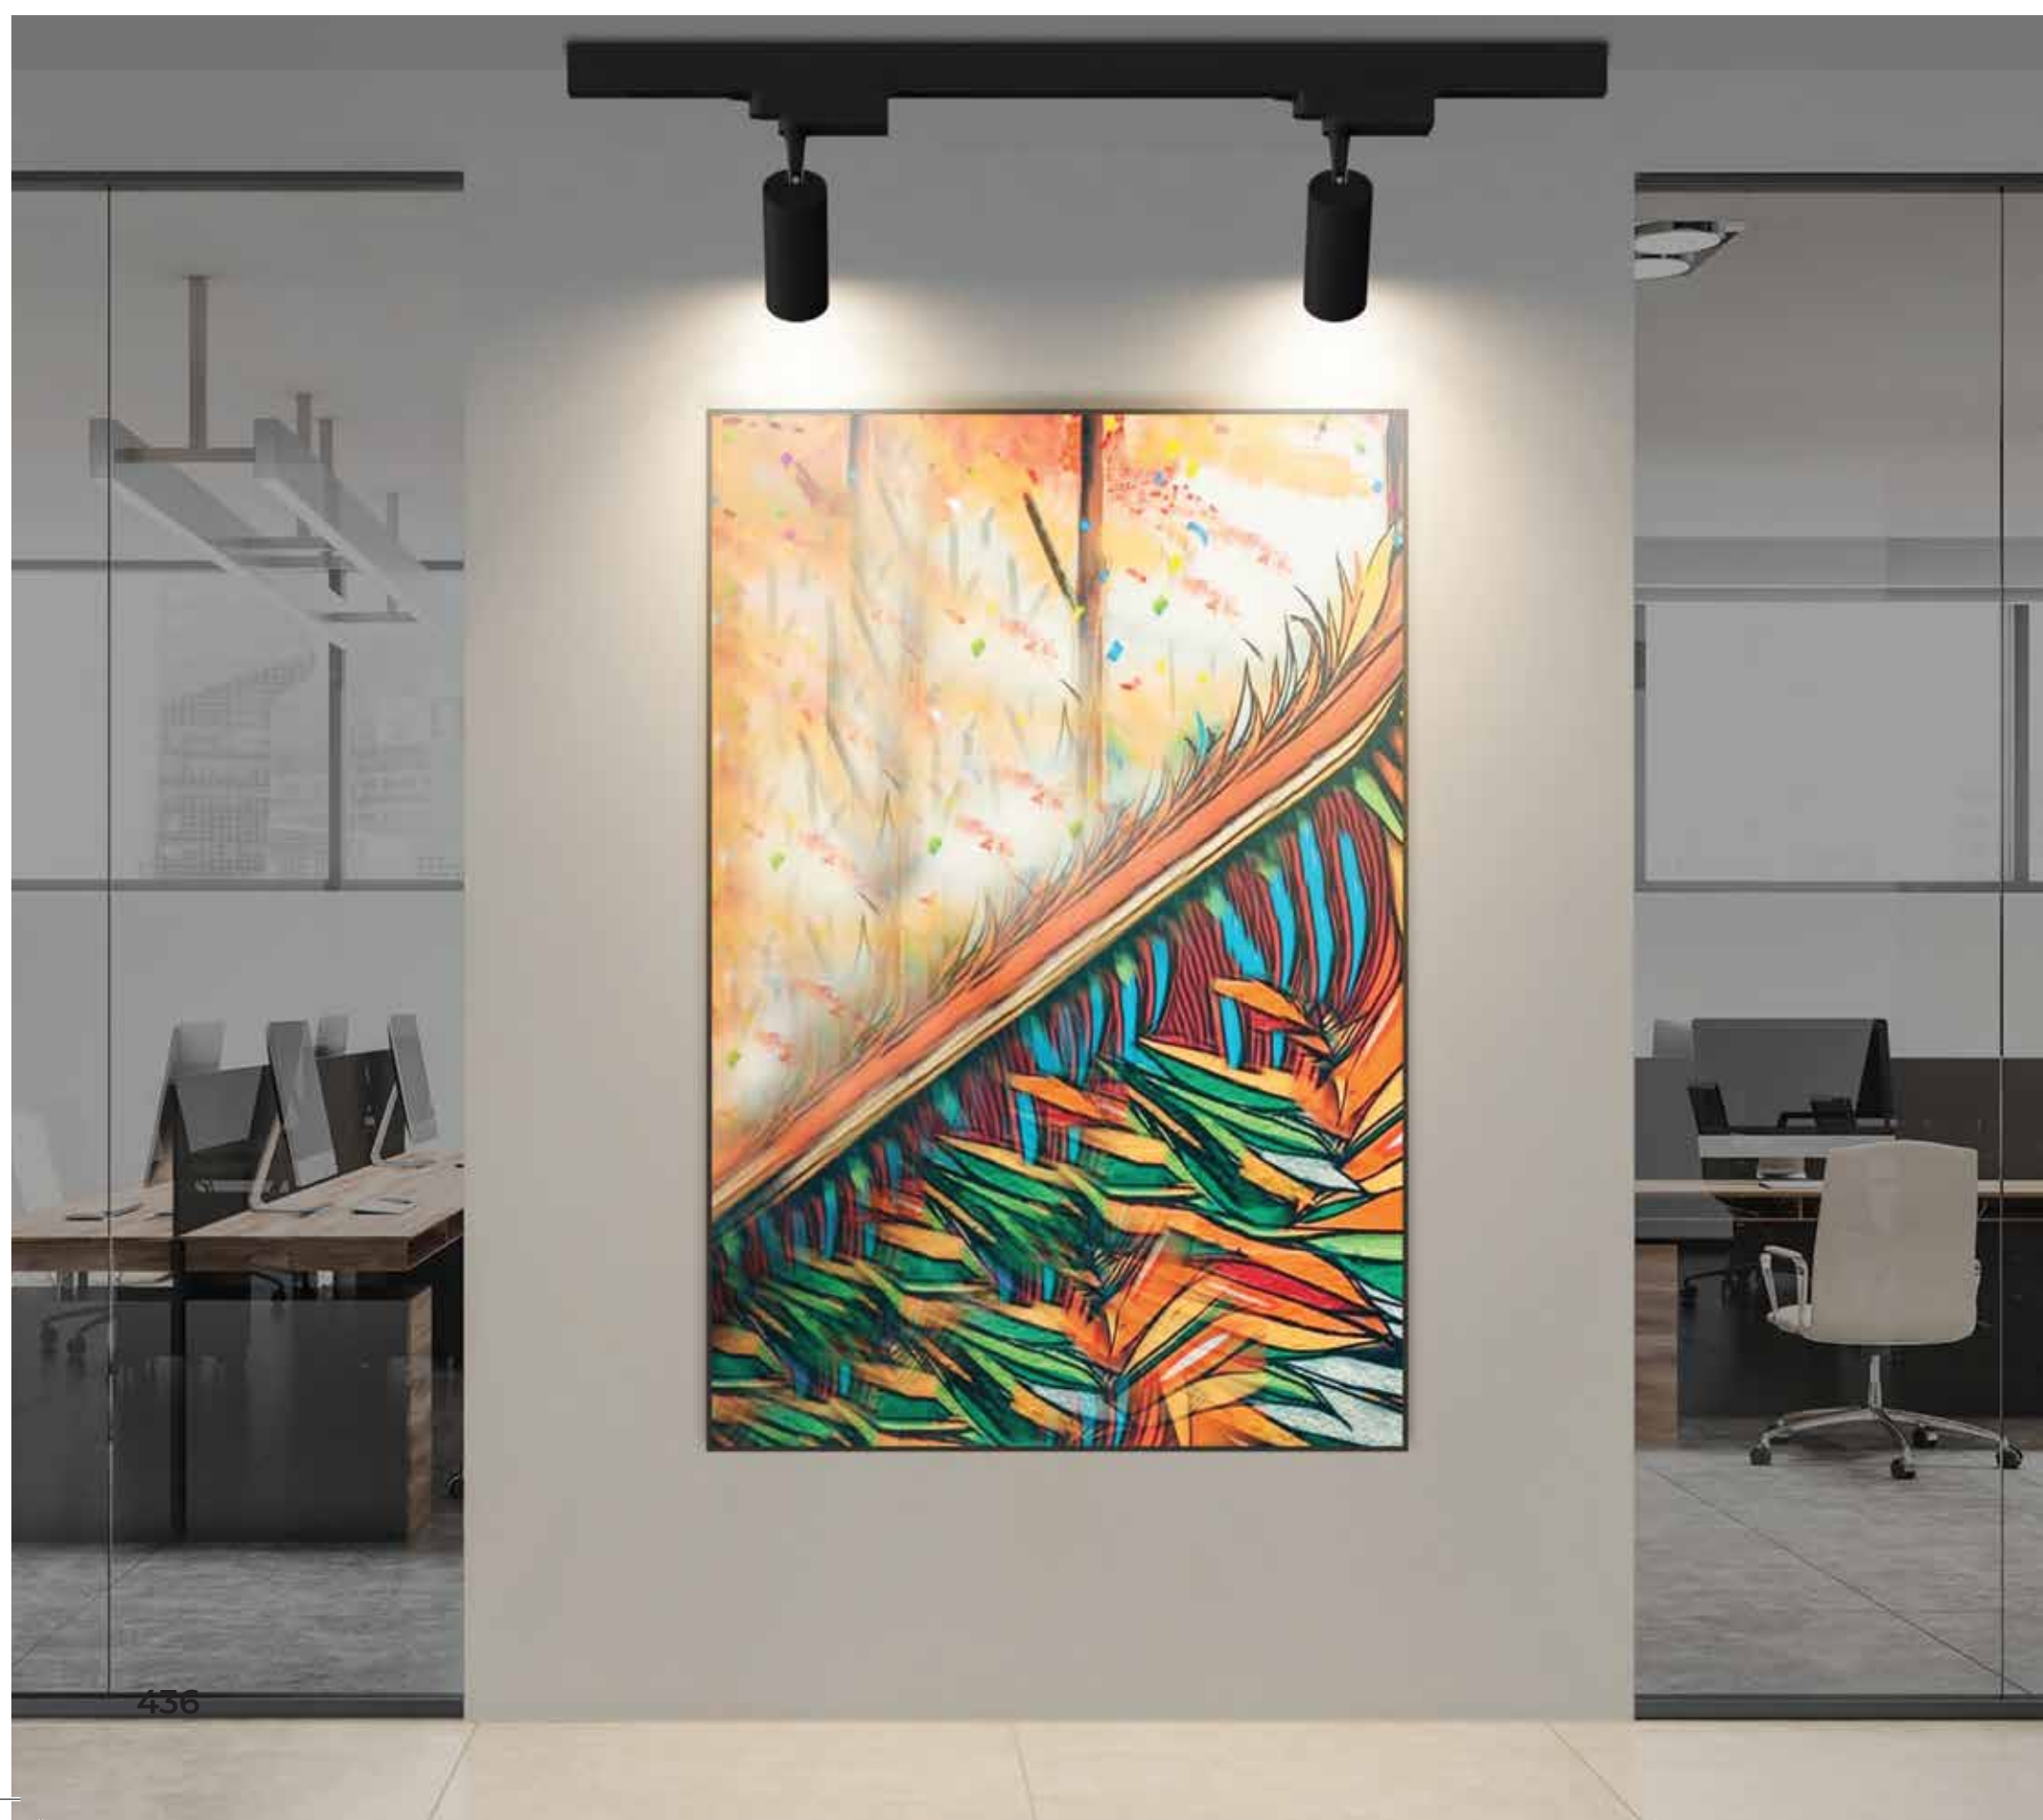

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable White (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8 / DALI +

SDCM<3

Lens & Reflector

L70 @50,000h


Aluminium Die-cast

Types


Track Mounted

Single Line Diagram

PHONEIX 70 WALLWASHER

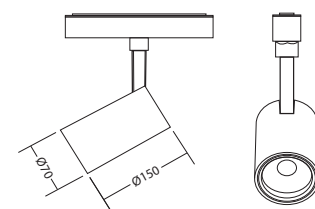

PHONEIX 90 WALLWASHER

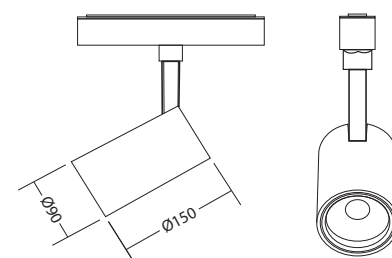


Colours



Light Distribution

Direct



CRI ≥ 90



TUNABLE WHITE



PHONEIX TRACK WALLWASHER











Phoneix track wallwasher has :

- Die cast- aluminium Luminaire housing
- Die cast heat sink
- Premium powder coated finish
- COB (Chip on Board) technology
- LED with effective colour rendering
- High efficiency wall washer optics
- 90° inclination on the horizontal plane
- 355° rotation around the vertical axis
- Angle can be directed as required
- Vivid & accurate lighting effect
- Suitable for non-magnetic Surface and Suspended Tracks
- Suitable for retail, hospitality & residential application

PHONEIX TRACK WALLWASHER



PHONEIX TRACK WALLWASHER

Product Order Code	System Power	Dimension
5004-      1	20W	Dia = 70mm, H = 150mm
5004-      2	40W	Dia = 90mm, H = 150mm

Order Options

Distribution






Direct



CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4



CRI	
>90	1

Beam Angle	
Wall washing	





Control		
ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2 DT6		3
DALI-2 DT8		4
DALI +		5

Material Colour	
Black	 1
White	 2



Mounting Type


Track Mounted

Accessories

Product Order Code	Accessories Name	Accessories Image
5004-01   	COB	

Order Options

CCT (Colour Temperature)		
3000K		1
4000K		2
5700K		3
Tunable White 2700K-6500K		4

CRI		
>90		1