

In.Licht Ultra

PHONEIX DOWNLIGHTER 4000K 30W TM 30 REPORT


Lighting Facts

Color Quality:


CCT	3860.8
Ra	93.5
Rf	89.6
Rg	100.7
Duv	-8.0E-4
SDCM	4.13

HCL index:


Illuminance	143.8
EML	100.5
M-EDI	91.12
S/P ratio	1.72
CAF	0.57
RG Risk	RG1
CS	0.17
SVM	0.0
Percent Flicker	0.0
Flicker Index	0.0
Frequency	0.0

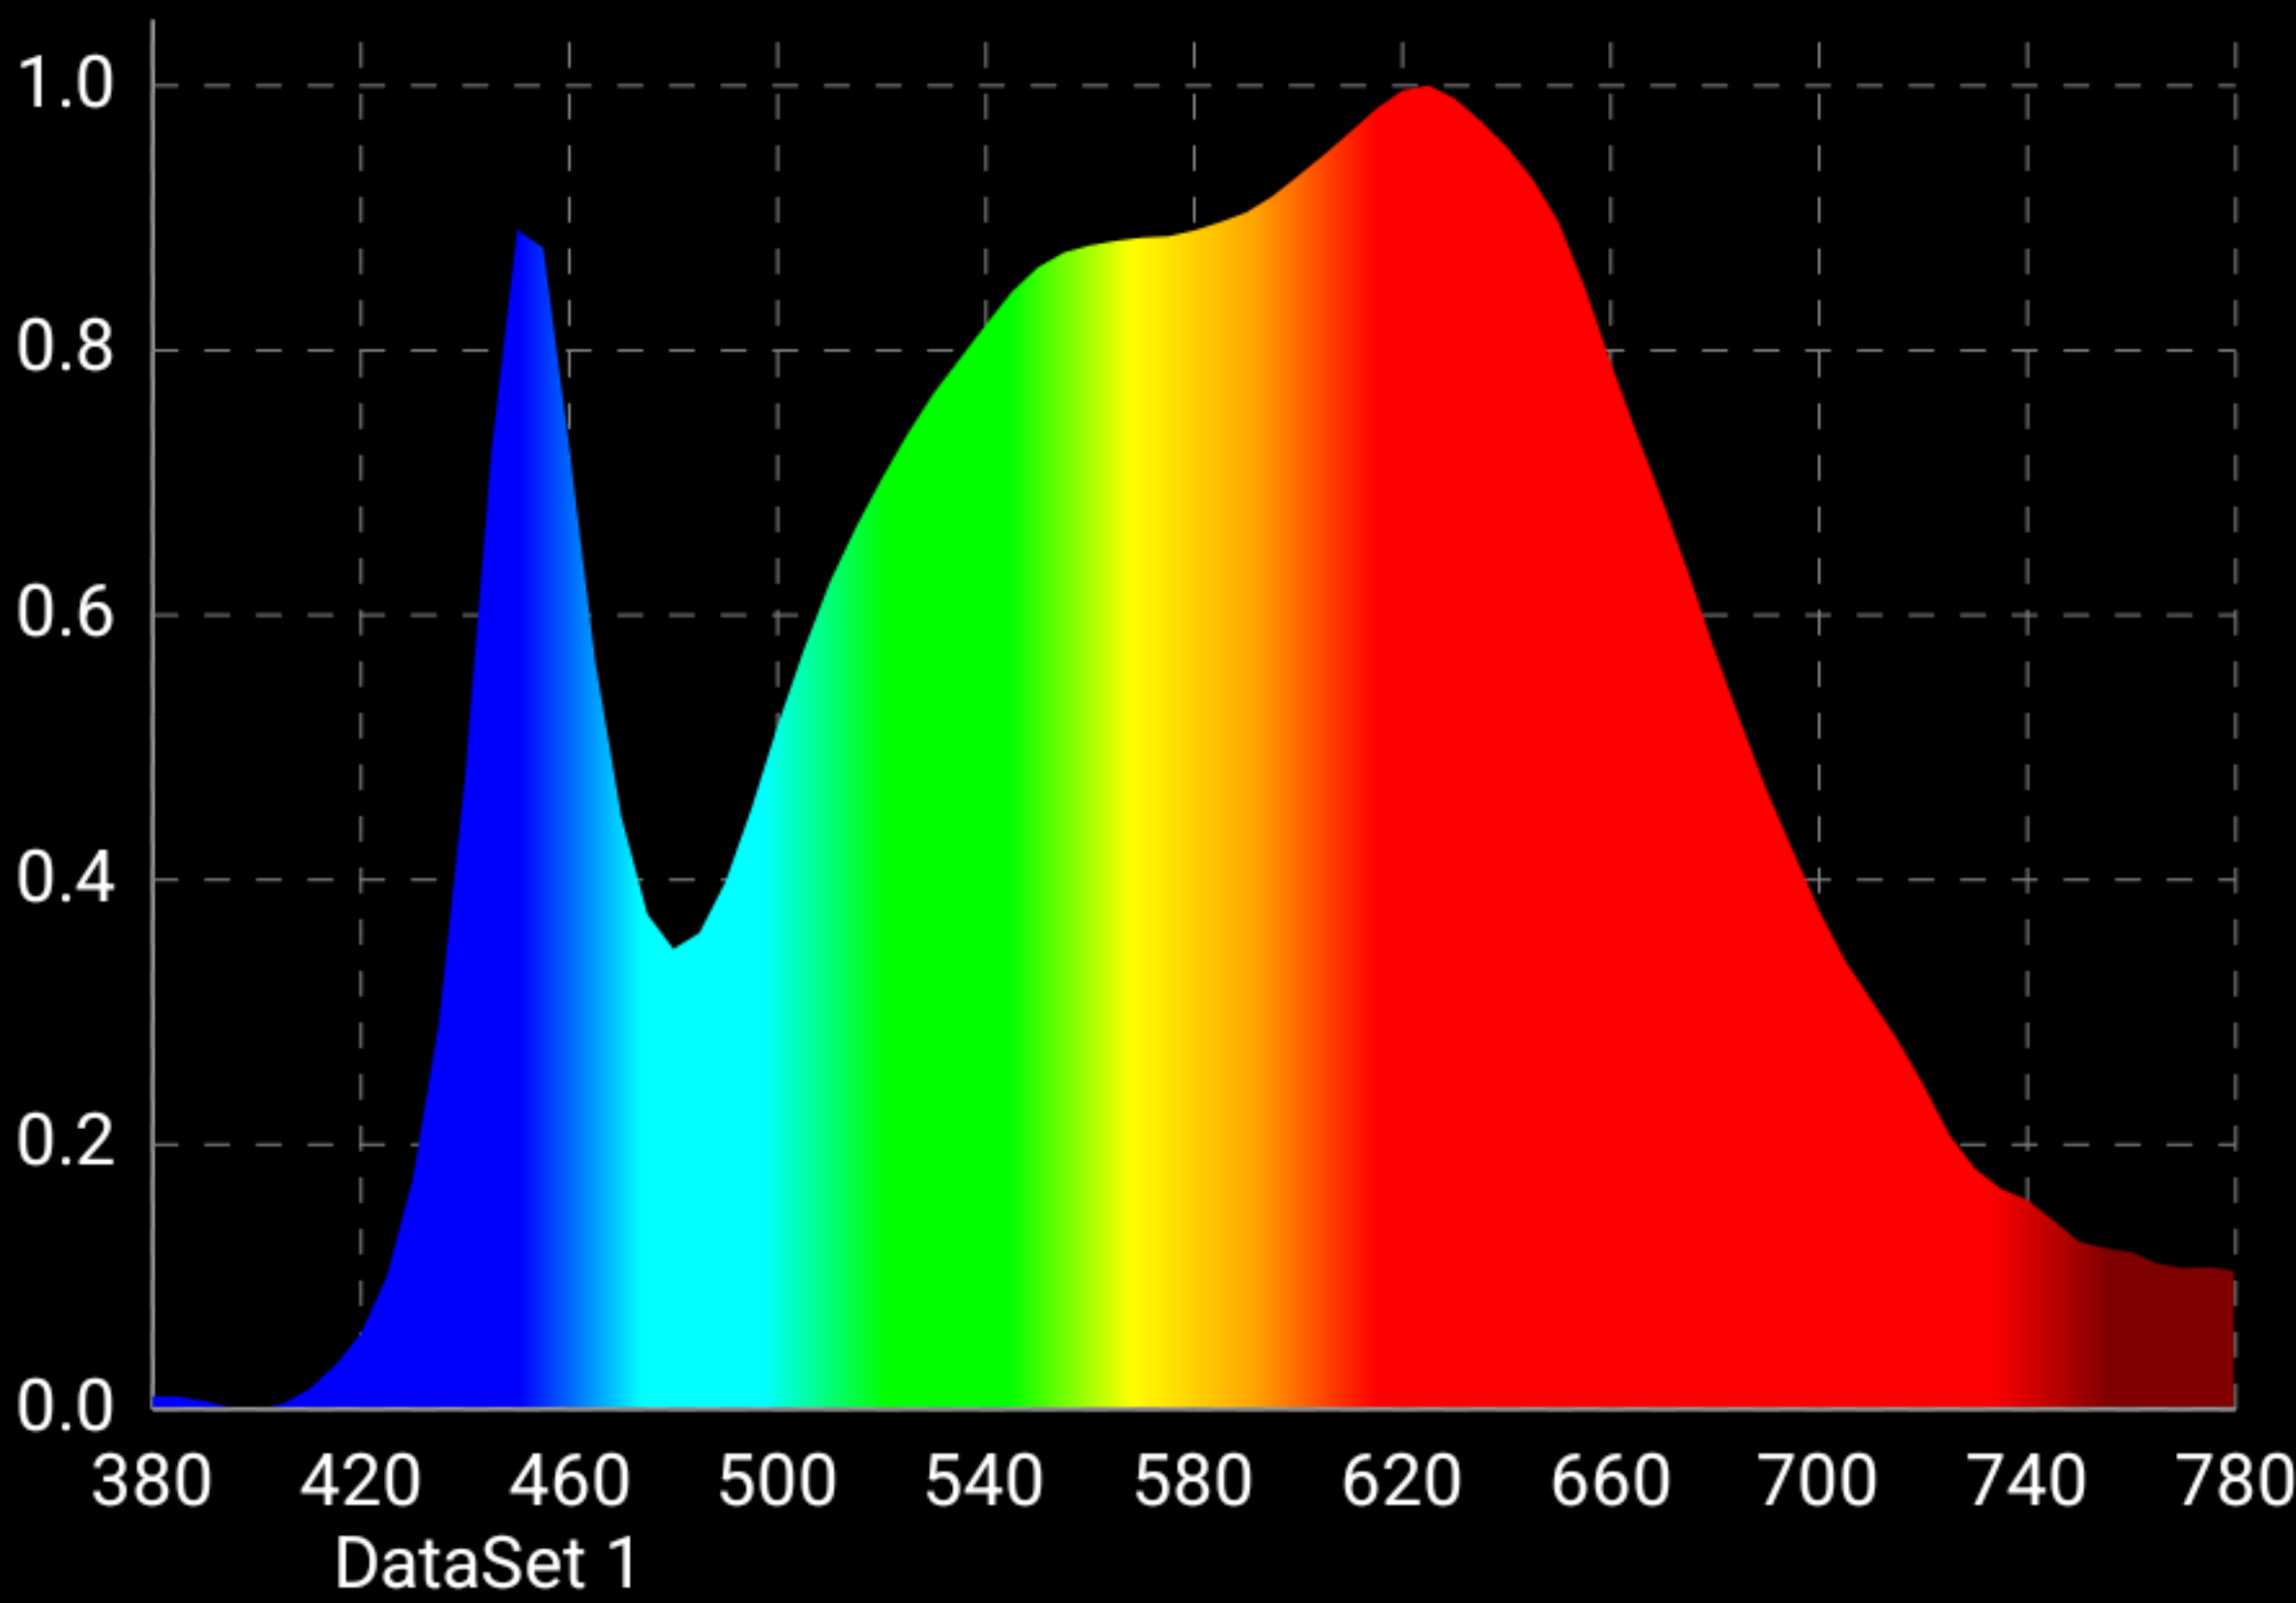

λ_d	583
λ_p	625
λ_{pV}	2.38

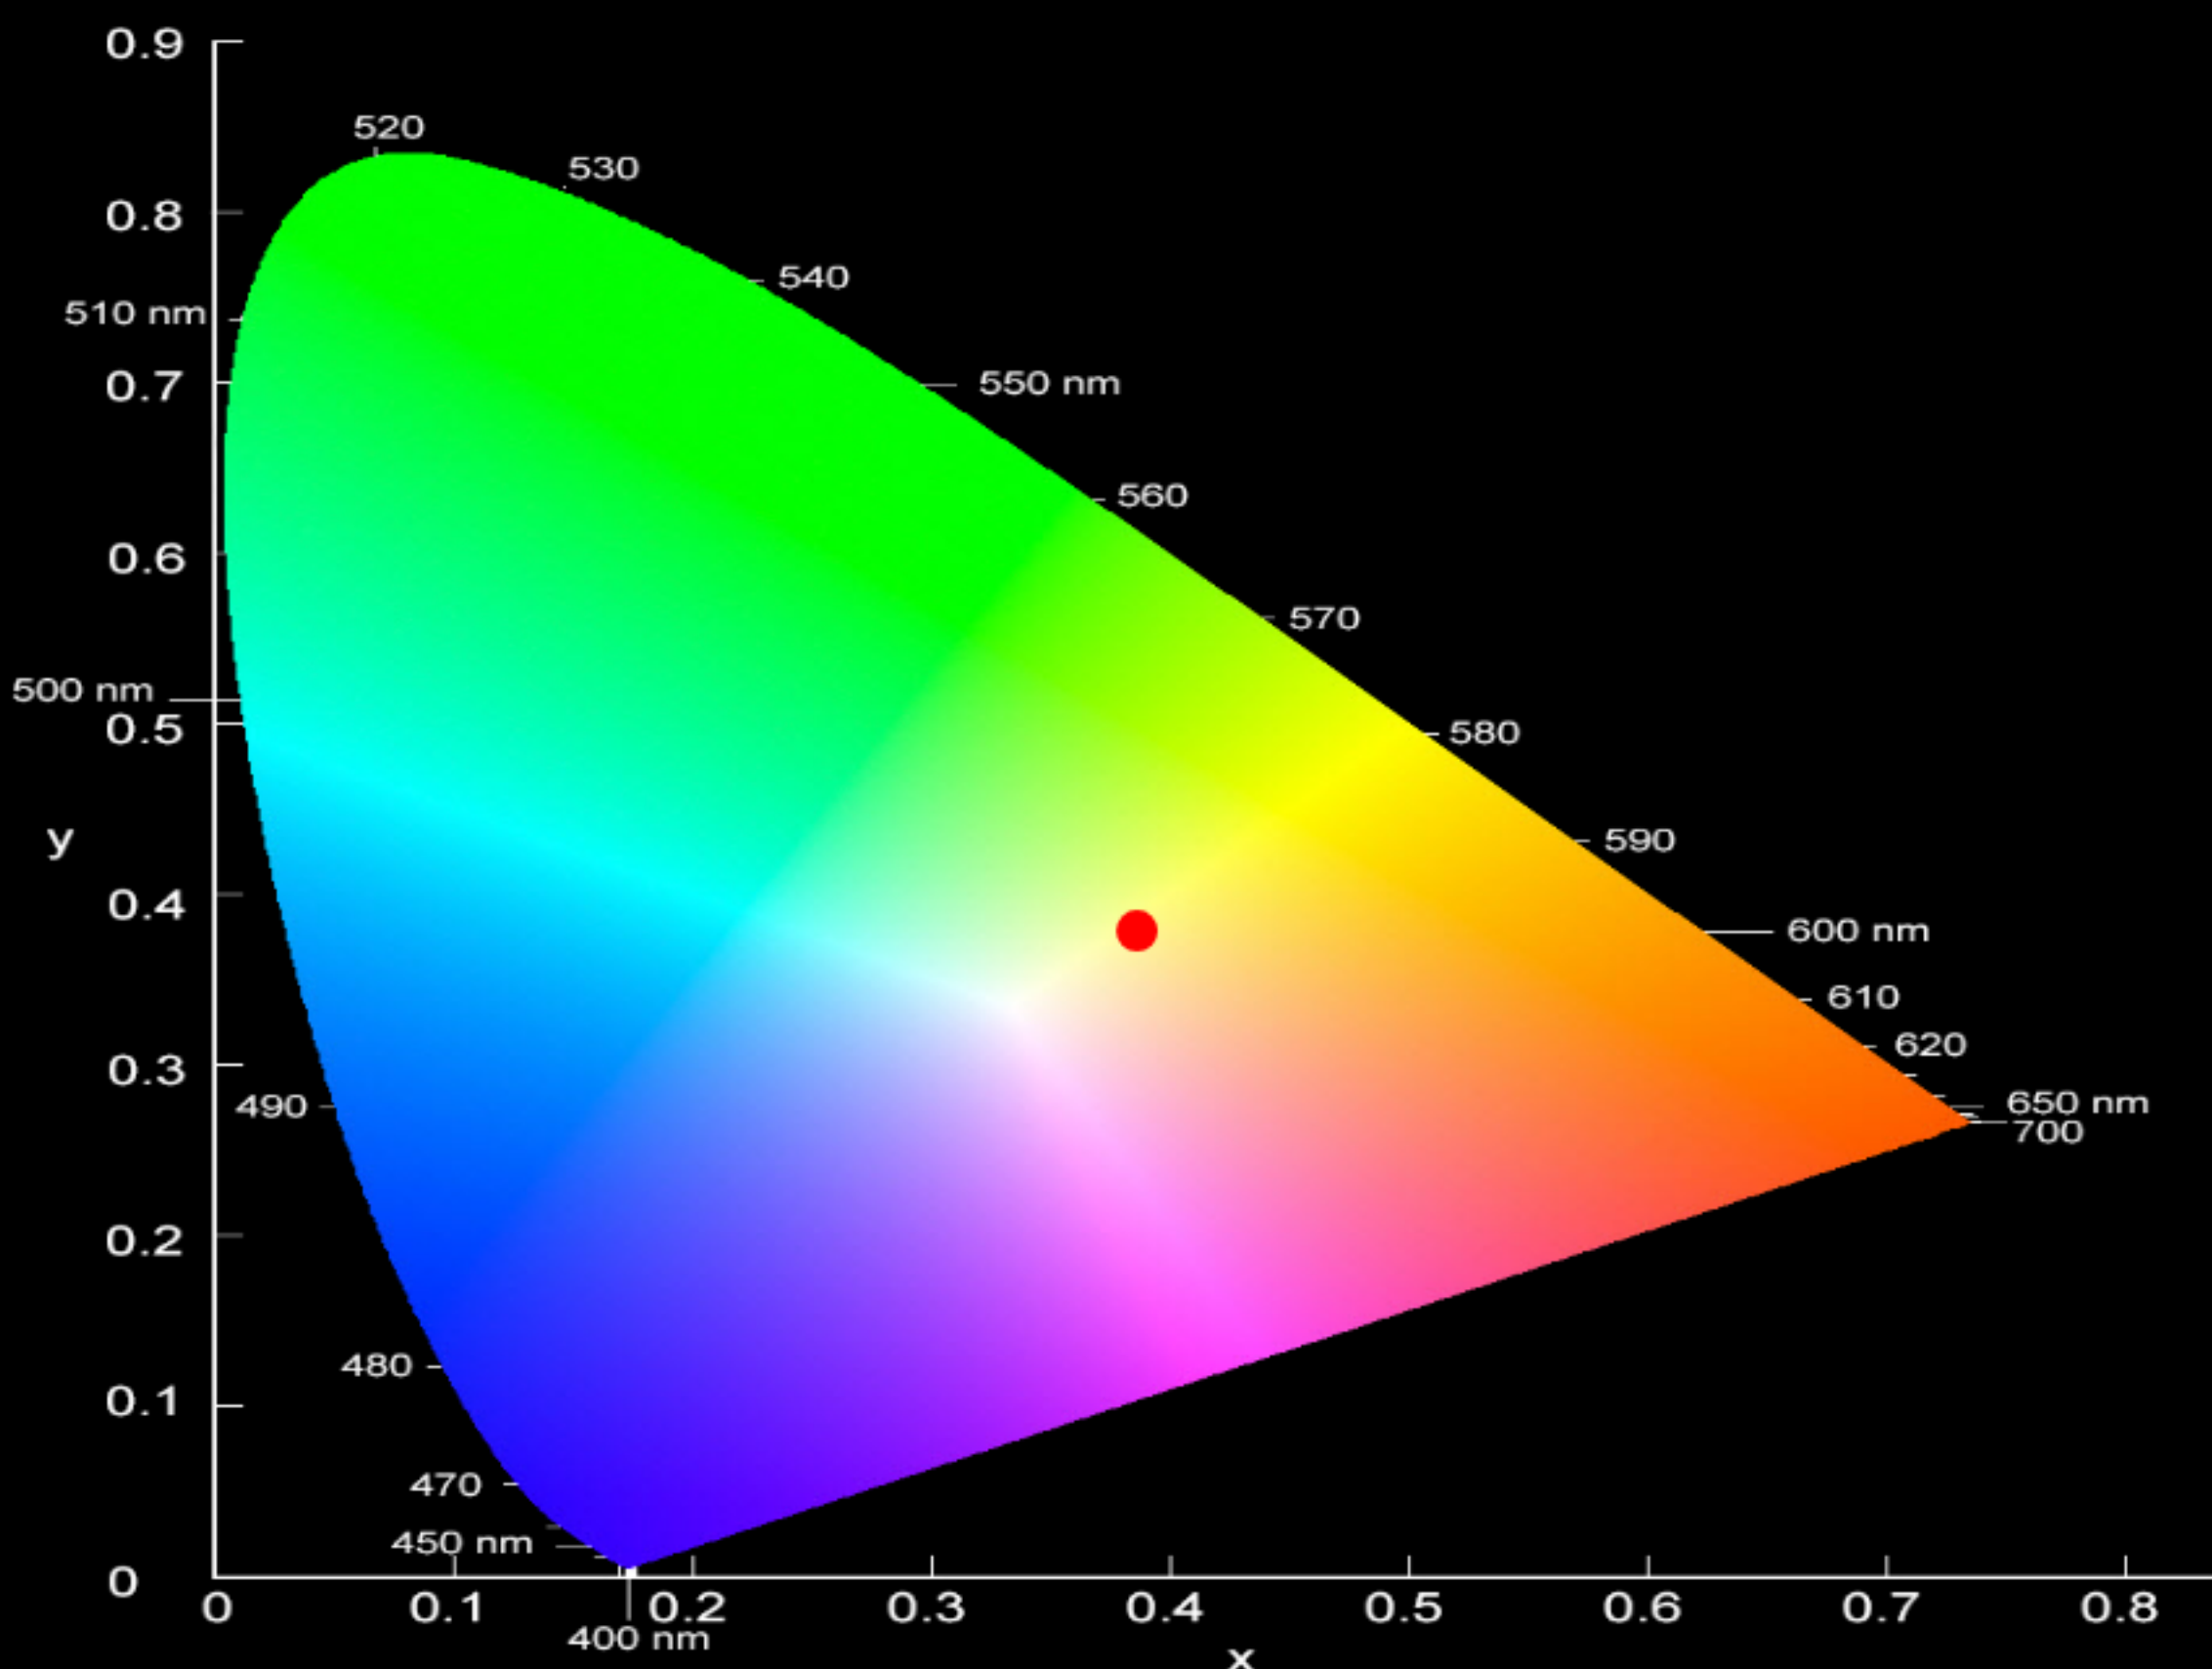


(x,y)	(0.386,0.379)
CCT	3860.8
Duv	-8.0E-4

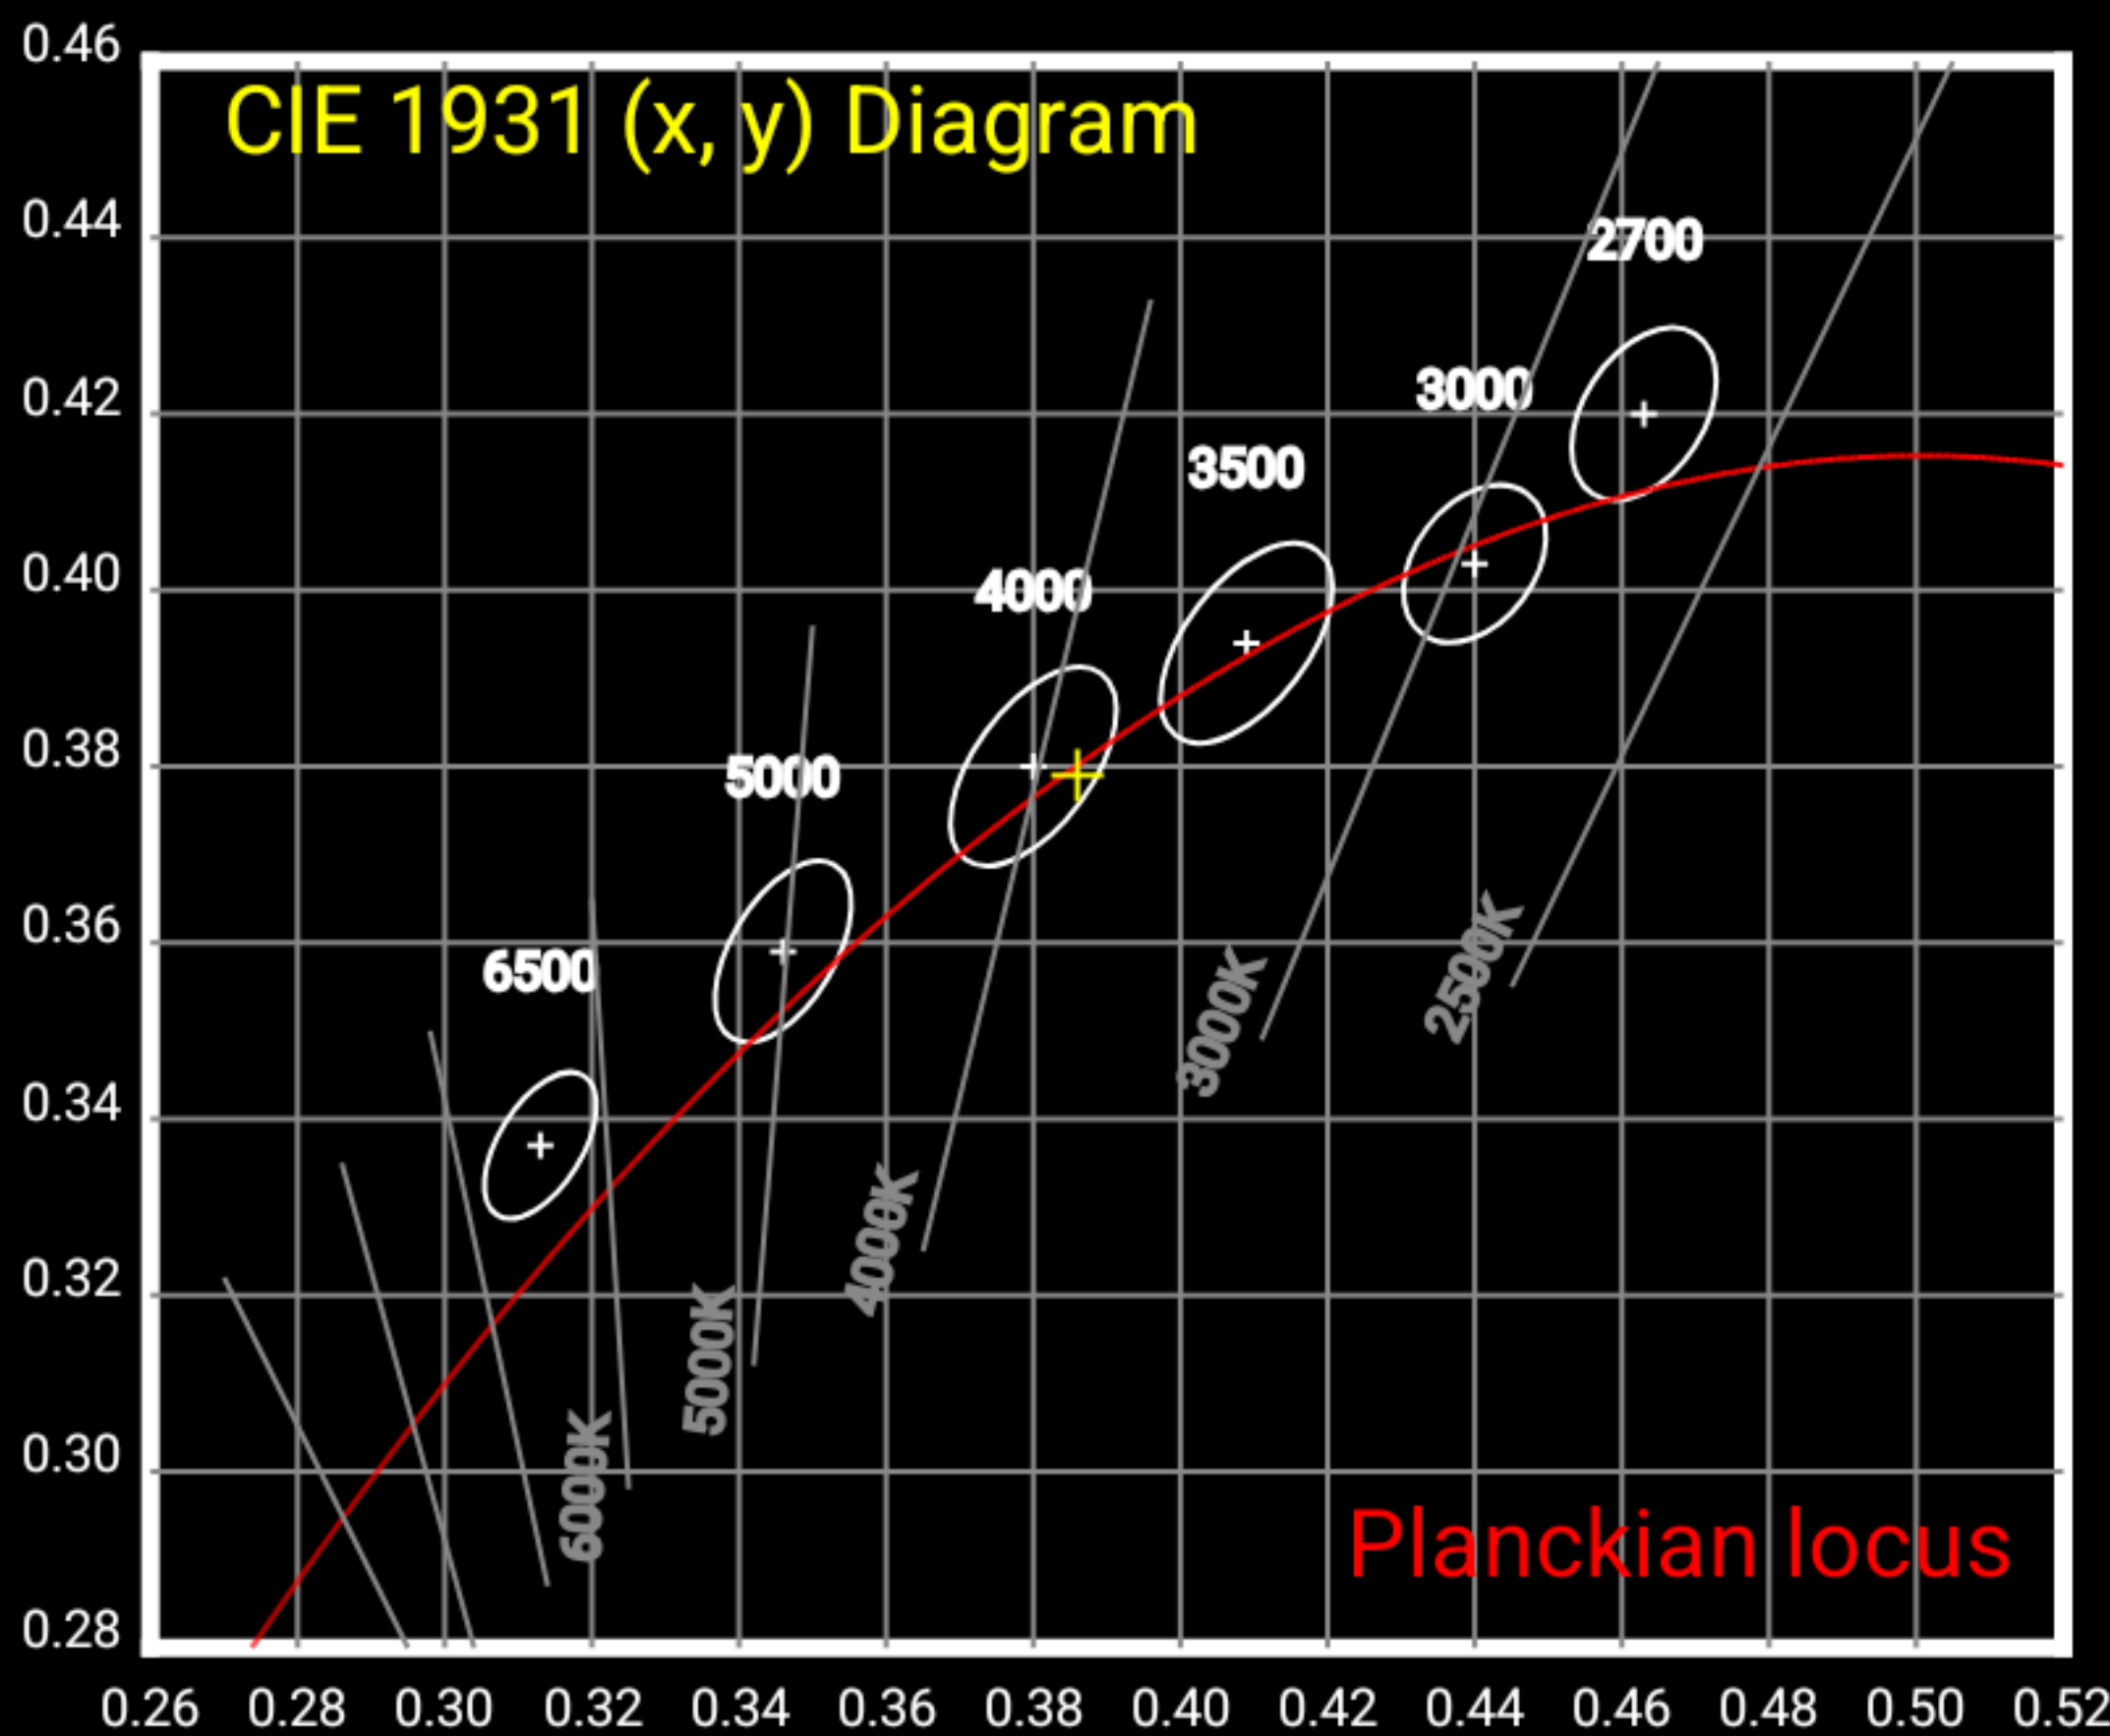


4.13
SDCM

x 0.386
y 0.379

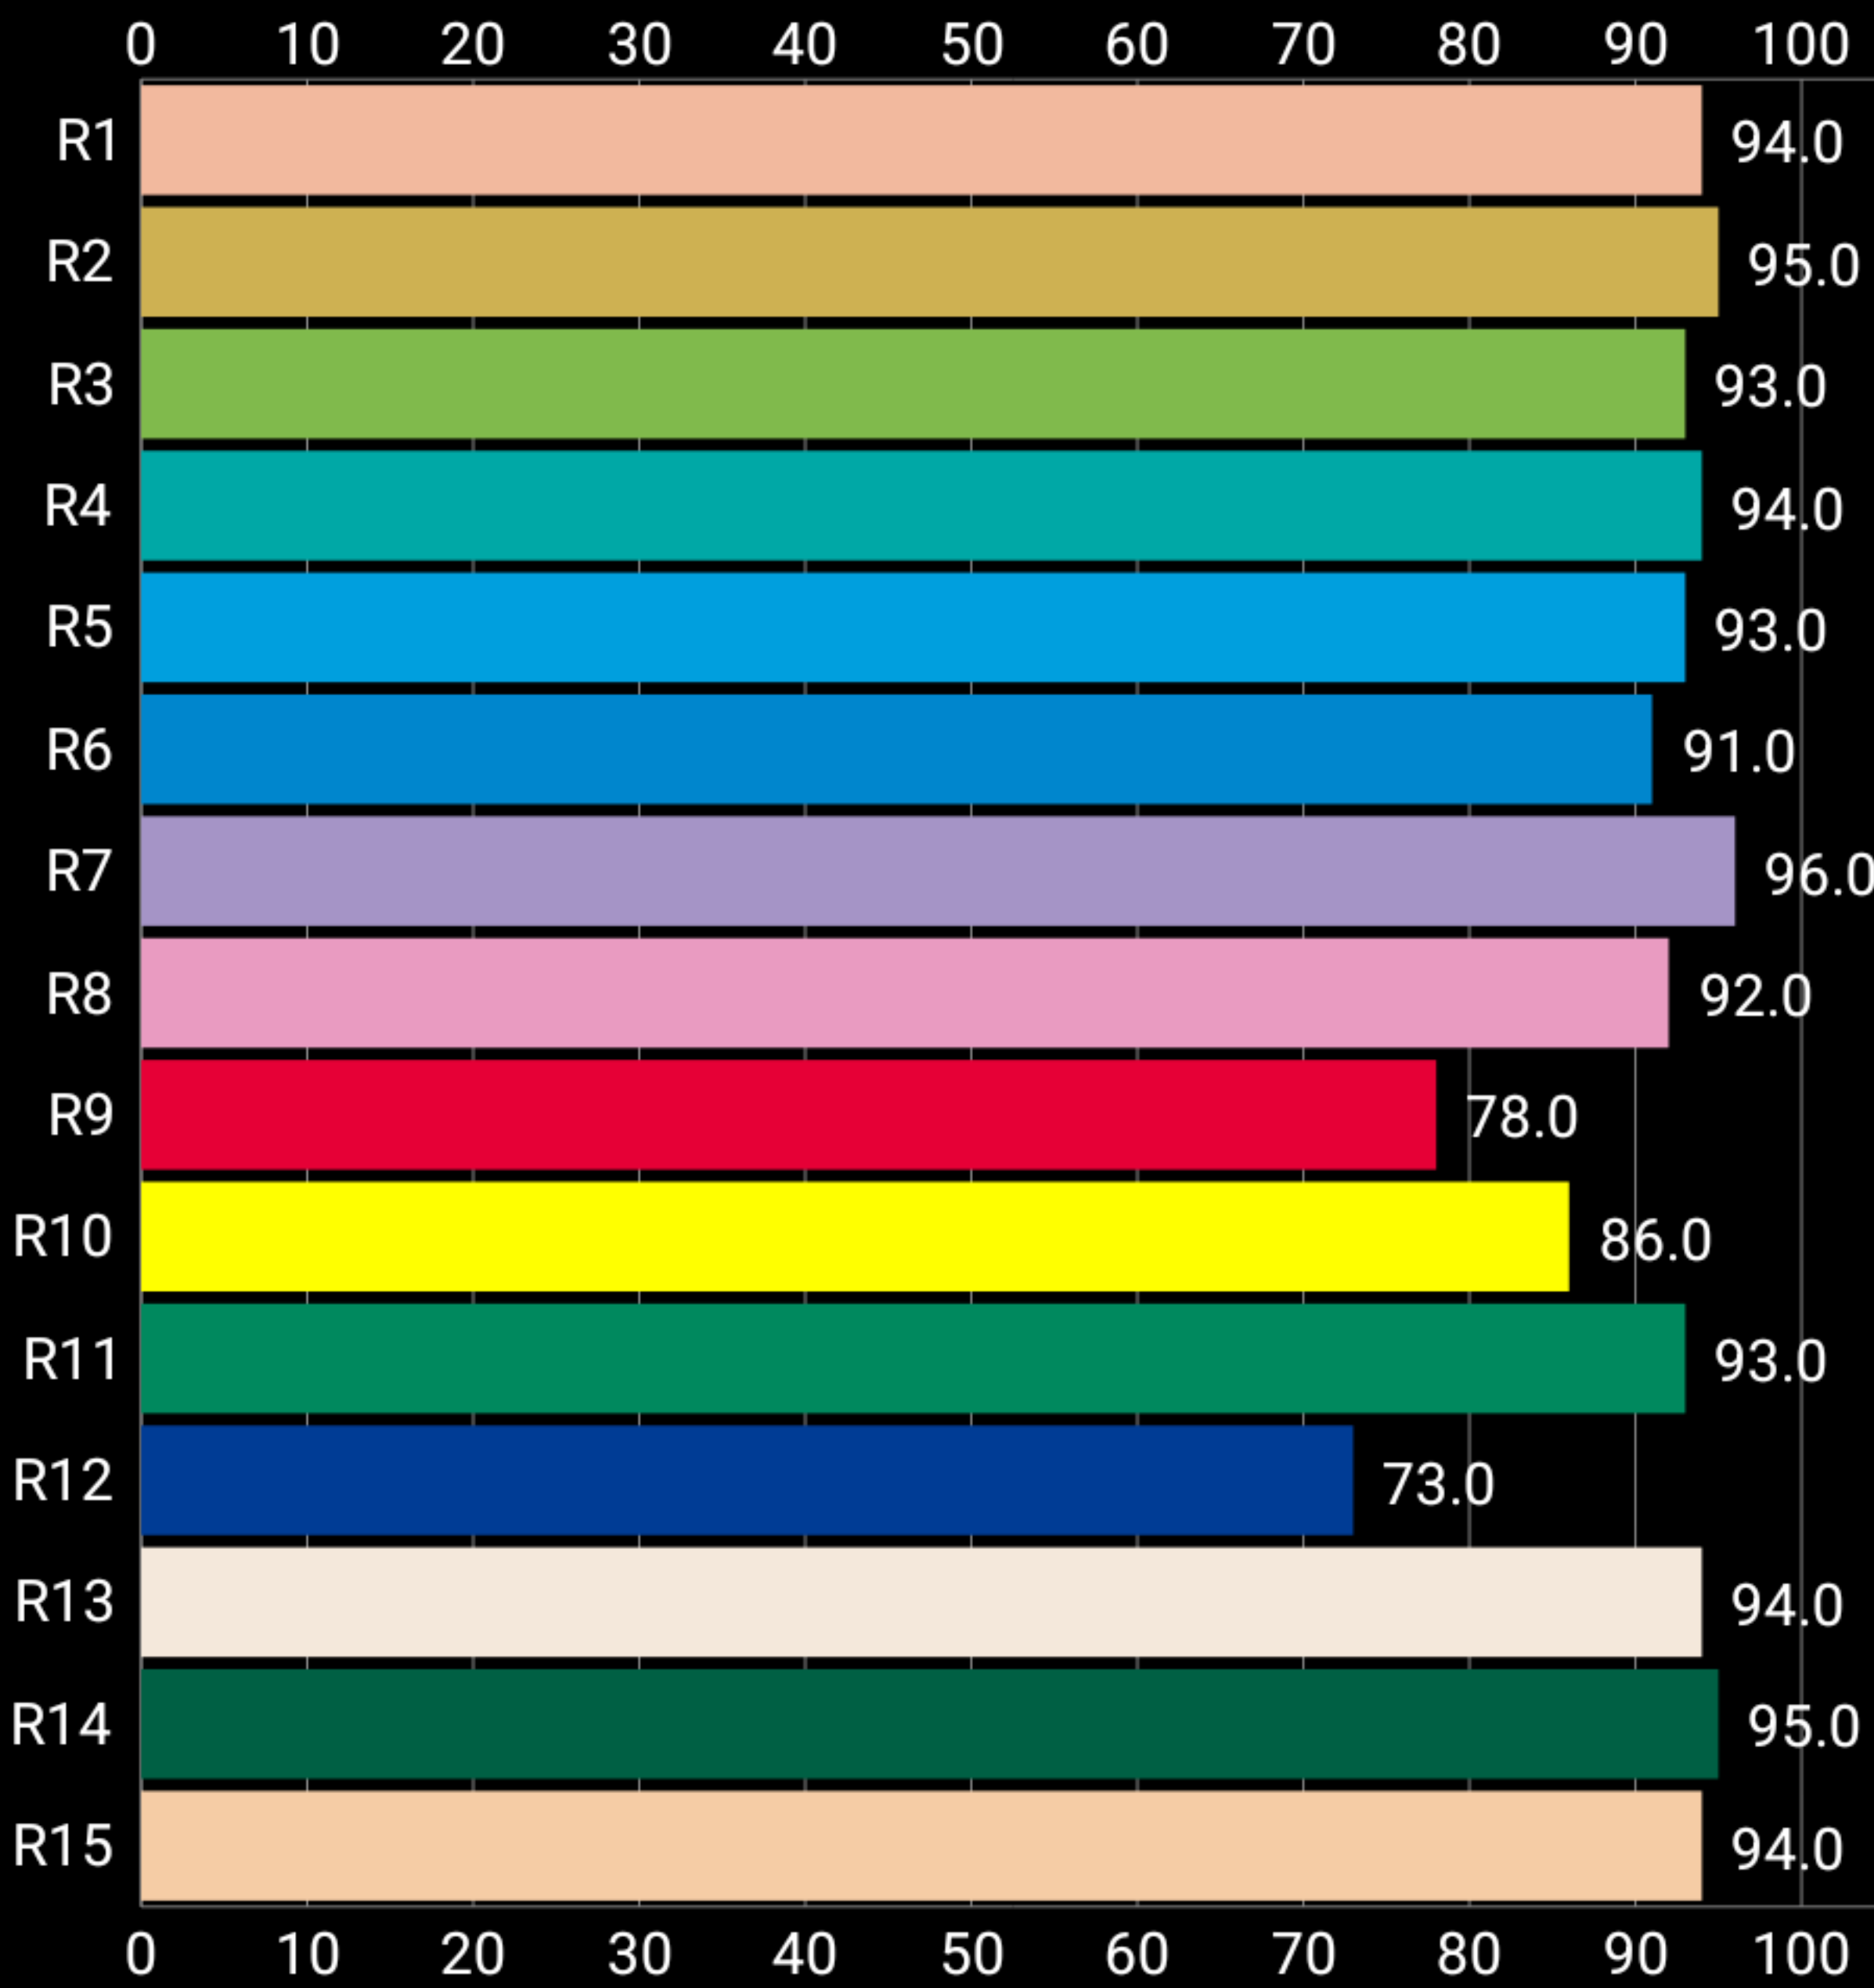


93.5
Ra

90.7
Re

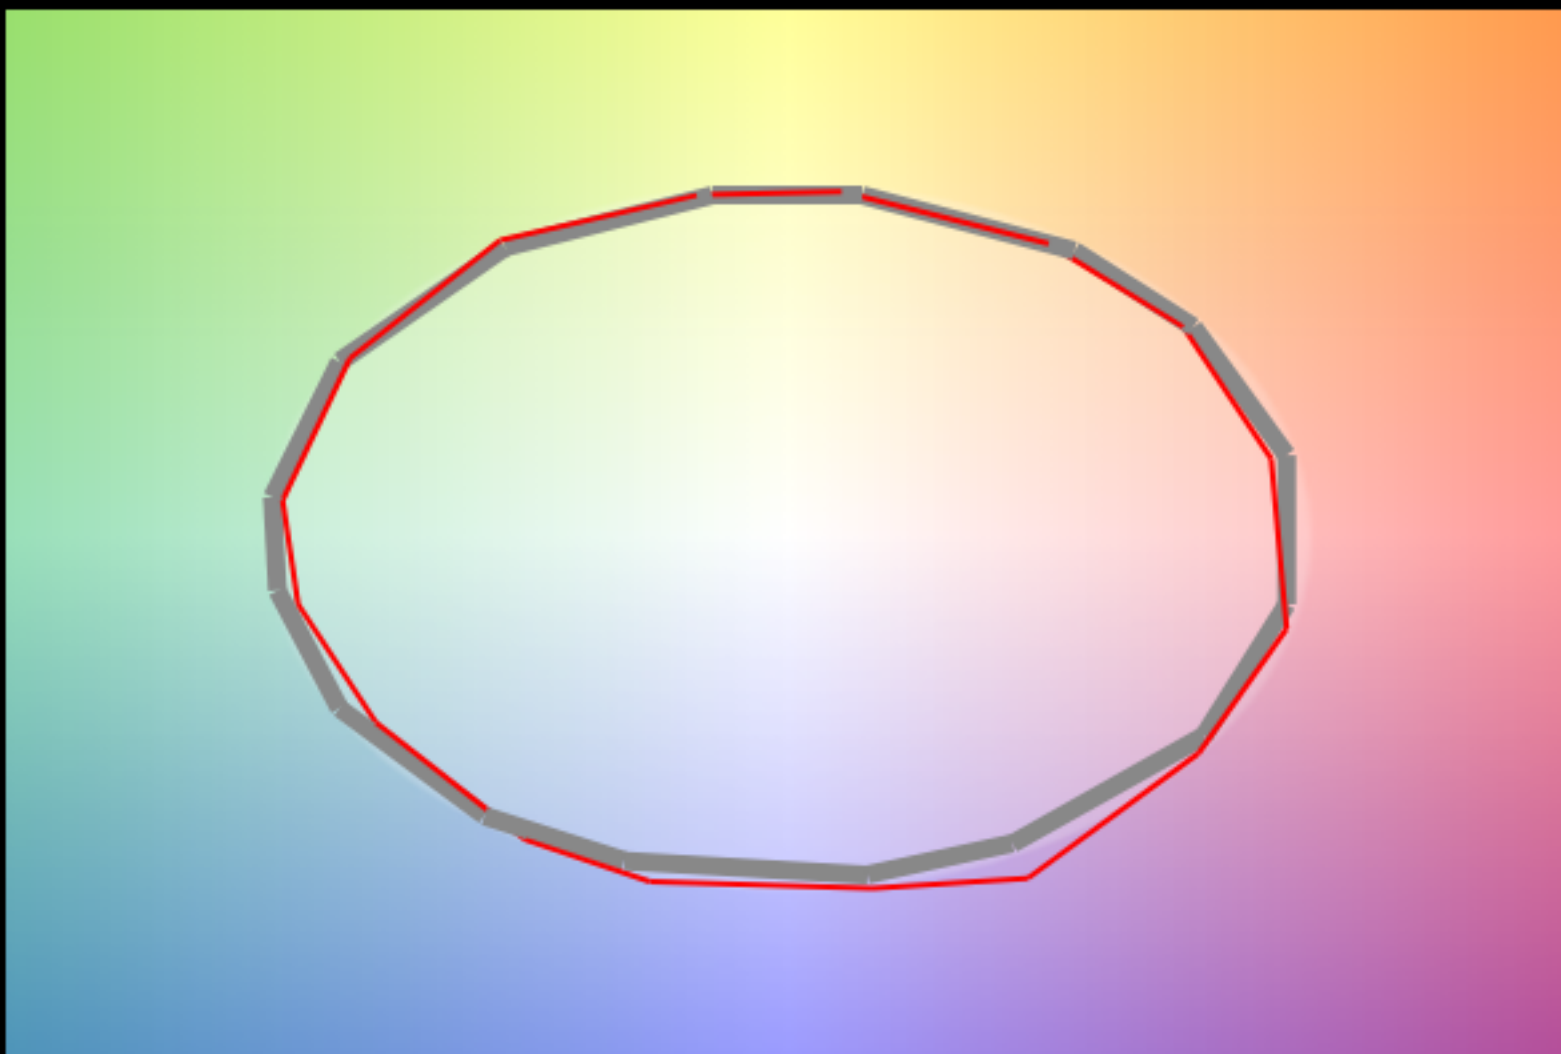


89.6
Rf

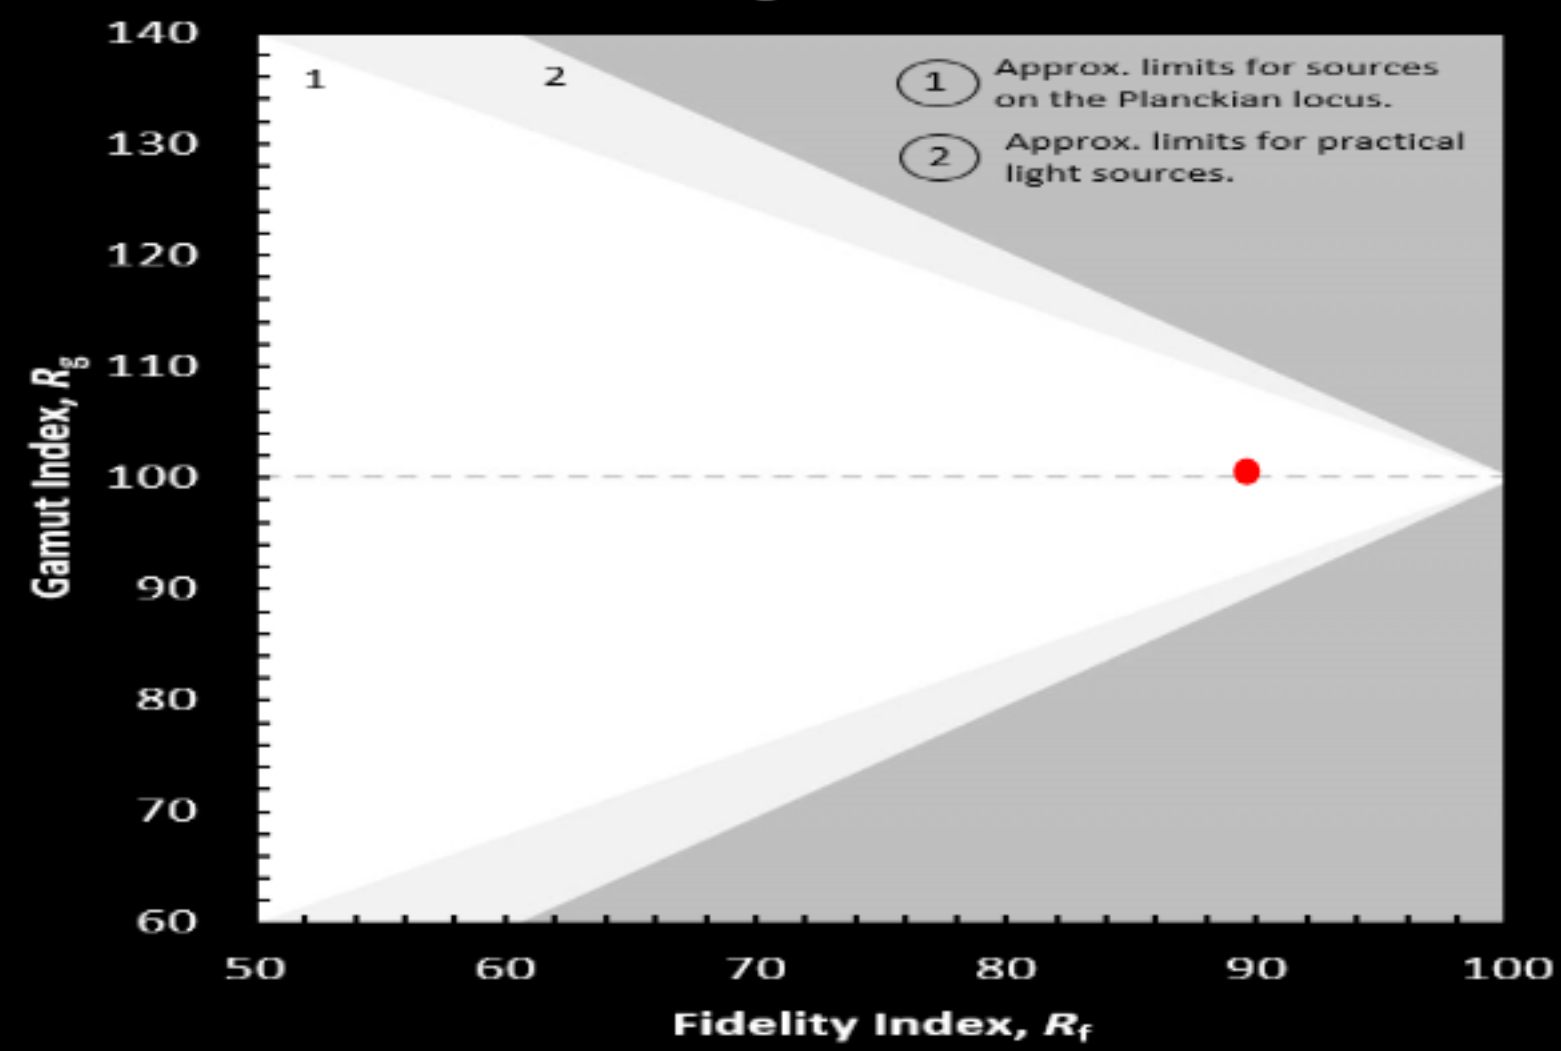


100.7
Rg

Time chart

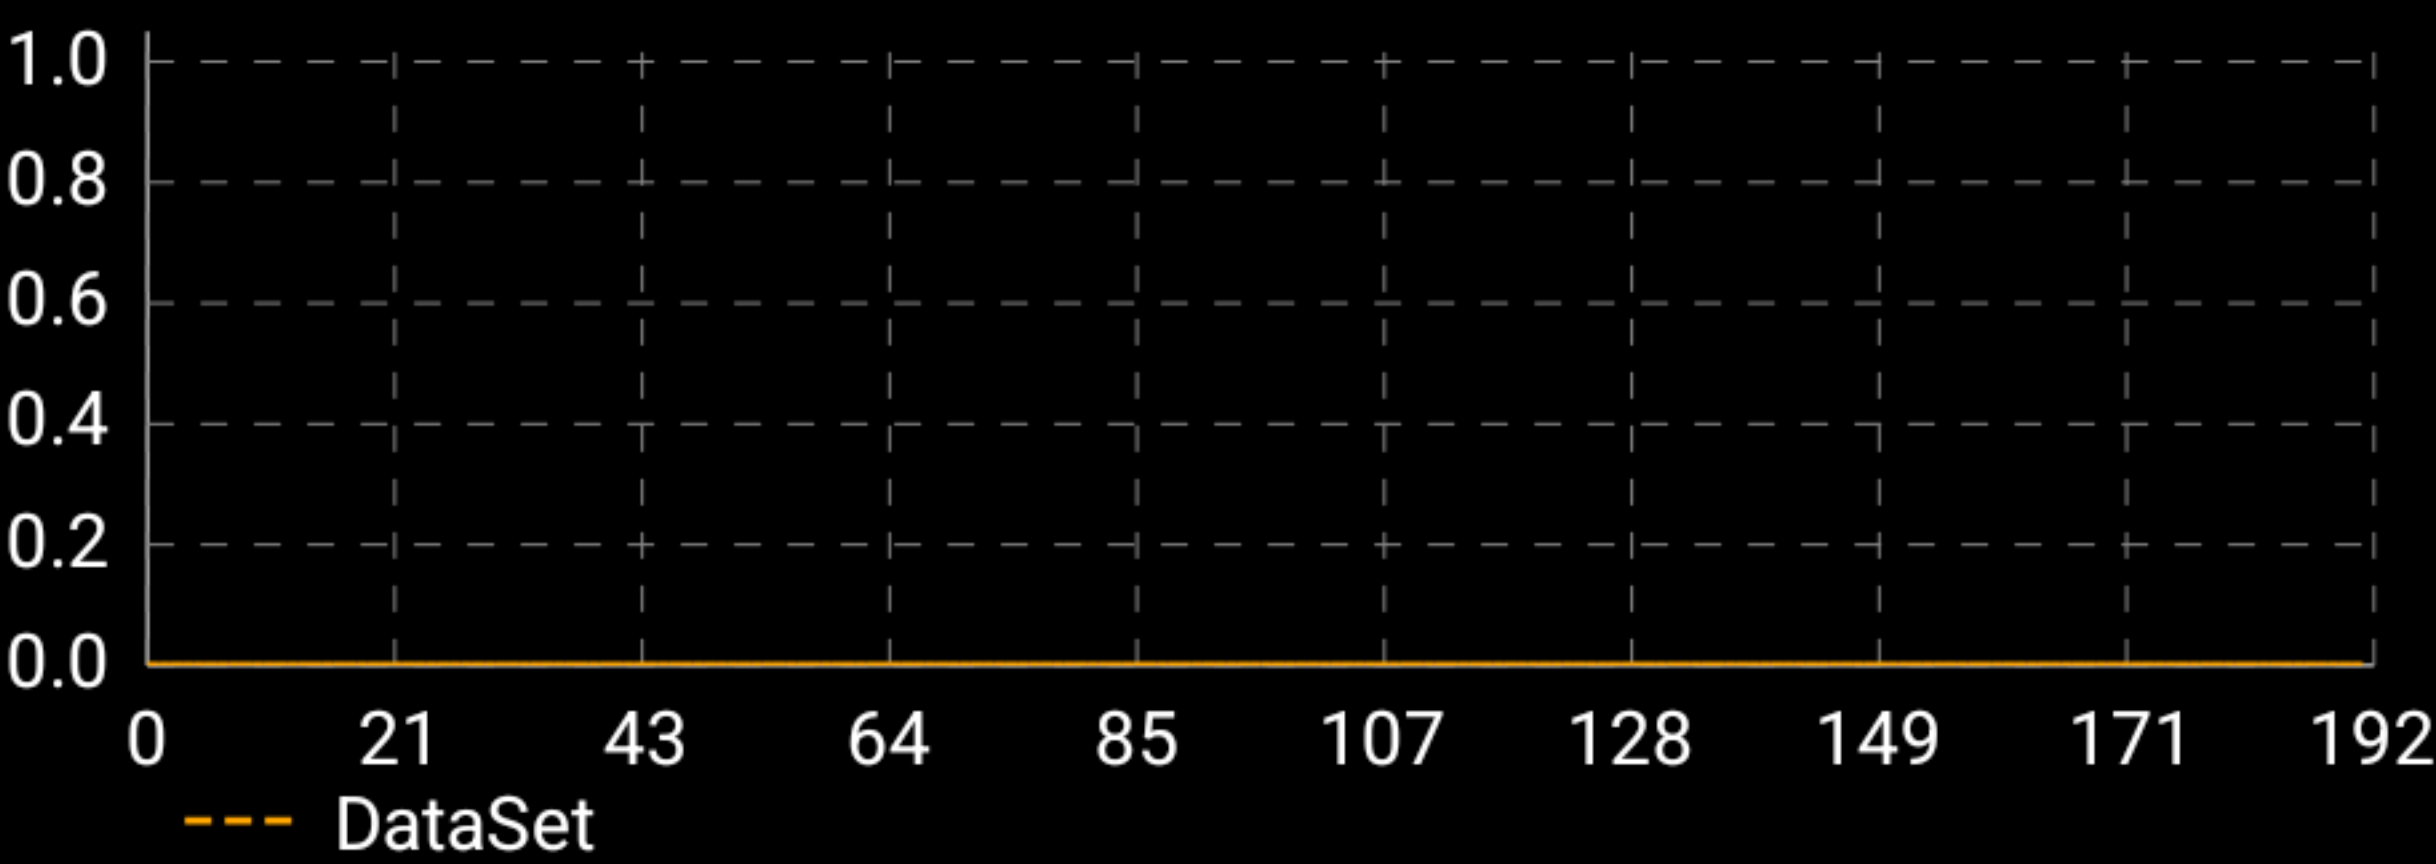

Freq. chart

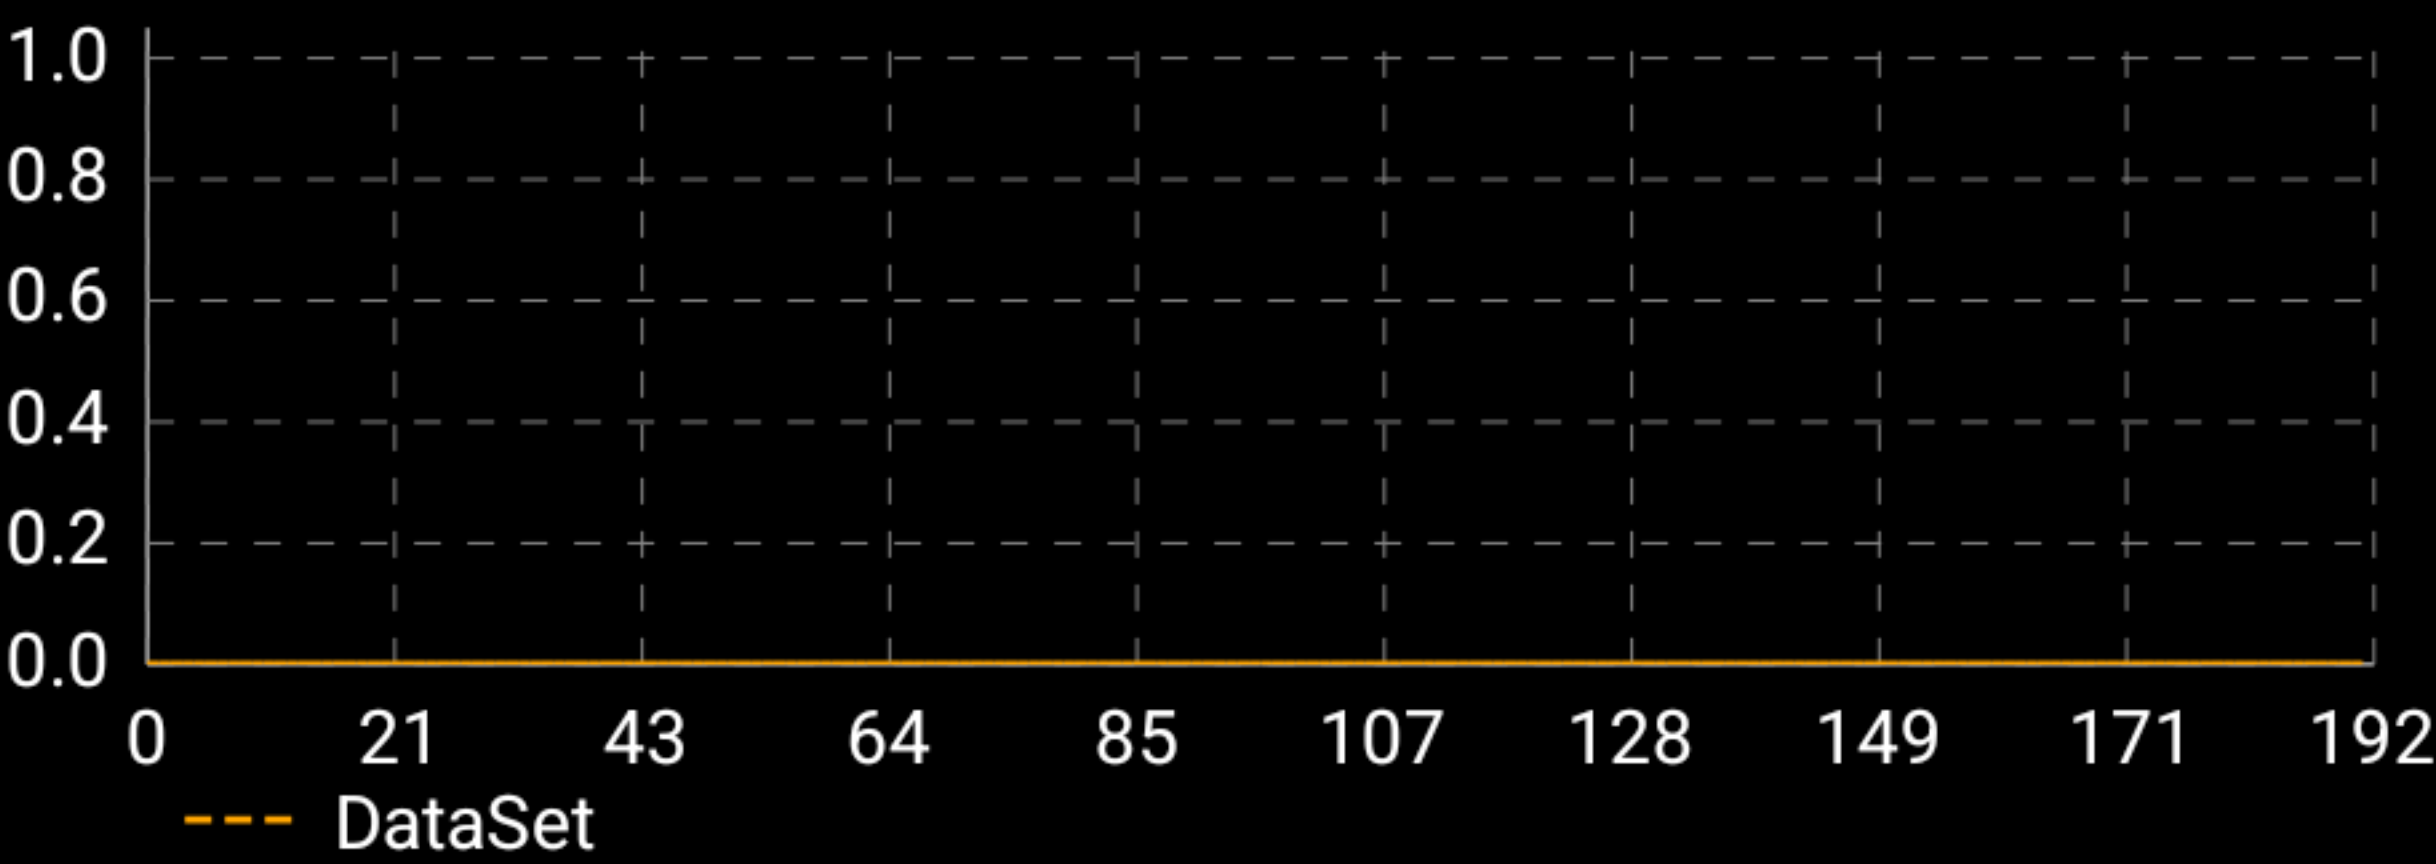

SVM	0.0
Percent flicker	0.0
Flicker index	0.0
Frequency	0.0