

PLENIX-180D
INGROUND LIGHTS

divinity lights



Quick Info

CRI ≥ 80

2700K, 3000K, 4000K

80 lm/W

Non-Dimmable/ Dali-Dimmable

SDCM<3

Tempered Glass



L70 @50,000h

SS

Types

Burial


Single Line Diagram

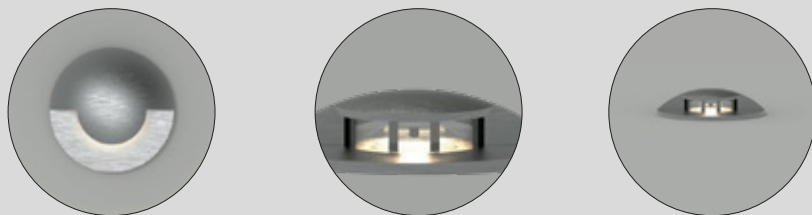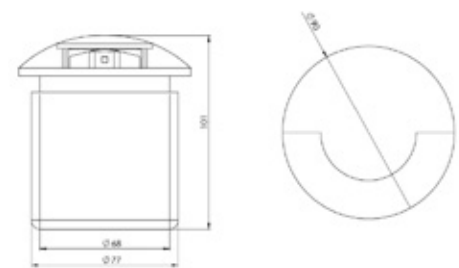

PLENIX-180D

PLENIX-180D inground light has :

- Luminaire housing of stainless steel
- IP67, High Ingress Protection against dust & moisture
- Ideal heat dissipation with good quality heat sink
- Three-way light distribution
- Beam angle 180°
- LED 3535/1 DOME
- Burial mounting
- Surge 2.5KV
- Uniform distribution of light in the outdoor environment
- High quality toughened glass to ensure the safety of the fixture



CRI ≥ 80

PLENIX-180D



System Power	Dimensions
4W	Dia- 90mm, H- 101mm

Order Options

CCT (Colour Temperature)

- 2700K
- 3000K
- 4000K

CRI

- >80

Beam Angle

- 180°

Control

- Non Dimmable
- Dali Dimmable

Mounting Type

- Burial

Material Colour

- RAL as per request