
divinitylights



4866





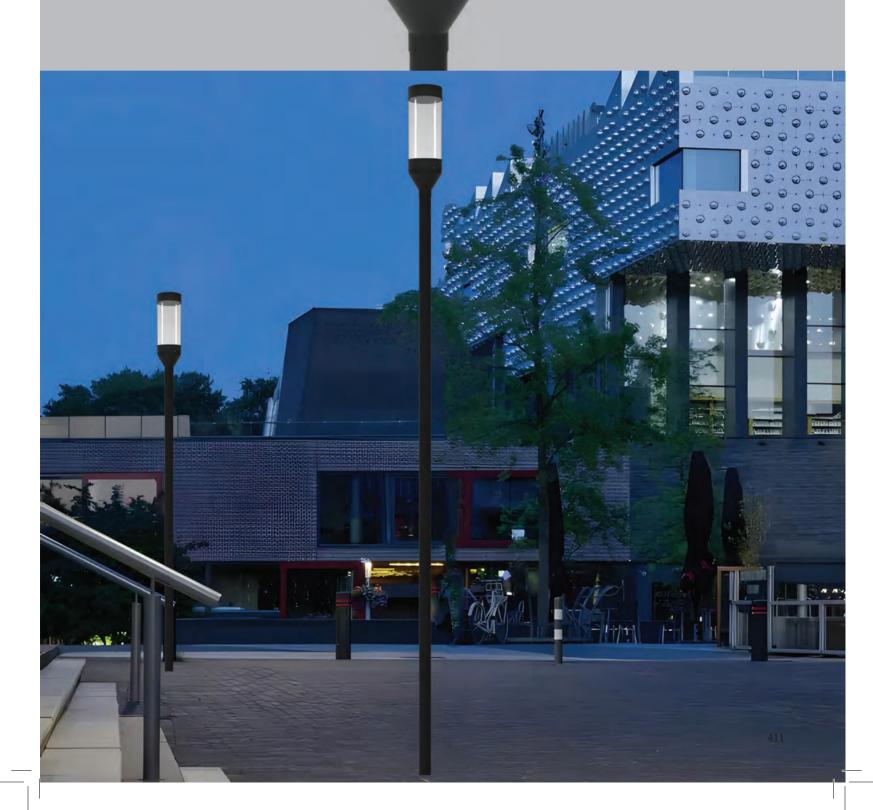

POLARIS-C4 COLUMN

Polaris-C4 Column fixture has:

- Luminaire housing of Aluminium
- IP66, High Ingress Protection against dust & moisture
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- Optimum for every outdoor space including society parks, streets, educational institutes, and pathways
- Sustainable LED technology offers durability and optimal light output with low power consumption
- Ideal design for rough outdoor environment
- Precise optics and beautiful form factor

divinity lights

Quick Info

CRI ≥ 90

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Clear Glass


L70 @50,000h


Aluminium Die-Cast

Types

Surface

Single Line Diagram

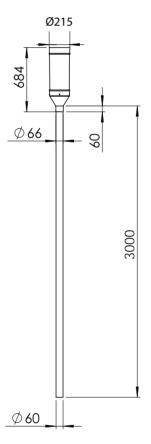



CRI ≥ 90

divinity lights

POLARIS-C4 COLUMN









| Product Order Code | System Power | Dimensions |
|--------------------|--------------|--|
| 1937 | 30W | Dia=215mm H=684mm Pole Height=3000mm |

Order Options

| CCT (Colour Temperature) | | |
|--------------------------|---------------|--|
| 2700K | | |
| 3000K | | |
| 4000K | | |
| CRI | | |
| >90 | | |
| Beam Angle | | |
| N.A | | |
| Control | | |
| Non-Dimmable | NOTE COMMANDE | |
| Dali-Dimmable | | |
| Mounting Type | | |
| Surface | | |
| Material Colour | | |
| Grey | | |