



RADIANCE RING

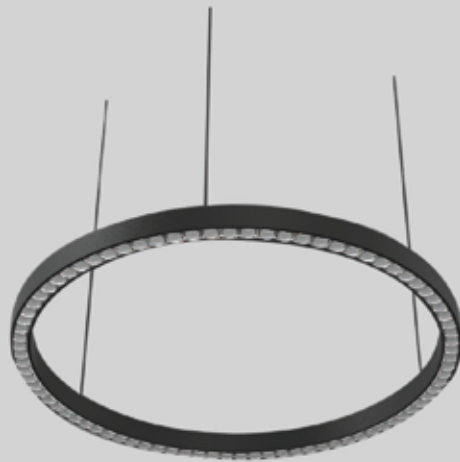

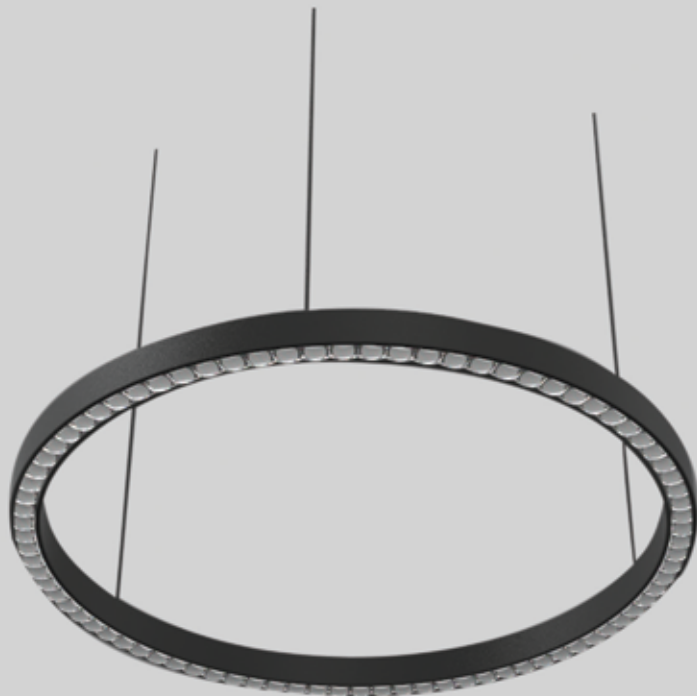

Radiance Ring

Radiance Ring fixture has

- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- High efficiency Lens
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Snap-fit system and no visible screw
- Unique curved design and patterns possible
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable White 2700-6500K

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

Lens

L70 @50,000h


Aluminium

Types



Pendant

Single Line Diagram

Profile Code
SDL-3005



Profile Code
SDL- 3006



CRI ≥ 90



TUNABLE WHITE

RADIANCE RING



RADIANCE RING

System Power	Dimensions
25W	Dia= 300mm, H= 90mm
35W	Dia= 600mm, H= 90mm
40W	Dia= 900mm, H= 90mm
50W	Dia= 1200mm, H= 90mm
60W	Dia= 2400mm, H= 90mm

Order Options

Distribution

Direct

CCT (Color Temperature)

3000K
4000K
5700K
Tunable 2700K-6500K



CRI

>90

Beam Angle

67°

Control

ON-OFF
ON-OFF (FLICKER FREE)
DALI-2 DT6
DALI-2 DT8
DALI +



Mounting Type

Pendent

Material Color

RAL As Per Request