

RIGEL-C5 COLUMN

Rigel-C5 Column fixture has:

- Luminaire housing of Aluminium
- IP66, High Ingress Protection against dust & moisture
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- Optimum for every outdoor space including society parks, streets, educational institutes, and pathways
- Sustainable LED technology offers durability and optimal light output with low power consumption
- Ideal design for rough outdoor environment
- Precise optics and beautiful form factor

divinity lights

Quick Info

CRI ≥ 90

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Lens


L70 @50,000h


Aluminium Die-Cast

Types

Surface

Single Line Diagram

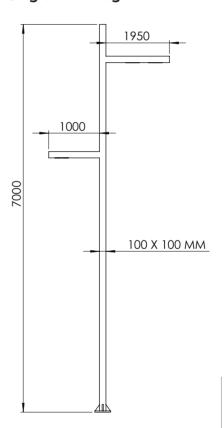



CRI ≥ 90

divinity lights

RIGEL-C5 COLUMN









Product Order Code	System Power	Dimensions
1925	2X60W	Arm L1=1950mm Arm L2=1000mm Pole Height=7000mm

Order Options

Grey

CCT (Colour Temperature)		
2700K		
3000K		
4000K		
CRI		
>90		
Beam Angle		
N.A		
Control		
Non-Dimmable		
Dali-Dimmable		
Mounting Type		
Surface		
Material Colour		