

RIGEL-C8
COLUMN

divinitylights



Quick Info

CRI ≥ 90

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Lens


L70 @50,000h

Aluminium Die-Cast

Types

Surface


Single Line Diagram

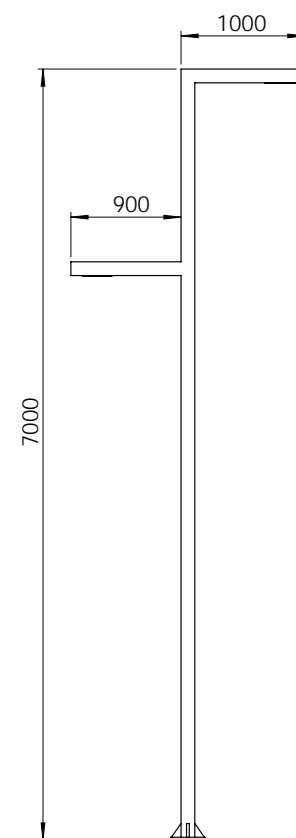

RIGEL-C8 COLUMN

Rigel-C8 Column fixture has :

- Luminaire housing of Aluminium
- IP66, High Ingress Protection against dust & moisture
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- Optimum for every outdoor space including society parks, streets, educational institutes, and pathways
- Sustainable LED technology offers durability and optimal light output with low power consumption
- Ideal design for rough outdoor environment
- Precise optics and beautiful form factor



CRI ≥ 90

RIGEL-C8 COLUMN



Product Order Code	System Power	Dimensions
1928	2X60W	Arm L1=1000mm Arm L2=900mm Pole Height=7000mm

Order Options

CCT (Colour Temperature)

- 2700K
- 3000K
- 4000K

CRI

- >90

Beam Angle

- N.A

Control

- Non-Dimmable 
- Dali-Dimmable 

Mounting Type

- Surface

Material Colour

- Grey 