SELTOS
TRICK LIGHT

divinity lights




divinity lights









SELTOS

Seltos Trick light has :

- Luminaire housing of Die-Cast Aluminium
- IP66, High Ingress Protection against dust & moisture
- The light is clear and the spot is uniform and consistent.
- Lens optics for even light distribution
- Gradually bright and gradually dark, monochromatic or colorful, can interact with musicThe narrow beam frame light effectively gives architectural lighting
- effects in residential and commercial buildings
- Can be used for stairs, corridors, guardrails, ancient buildings, windows, walls, etc.

Quick Info

CRI ≥ 80

2700K, 3000K, 4000K, RGB, RGBW

35 lm/W

Non-Dimmable/ Dali-Dimmable

SDCM<3

Lens


L70 @50,000h

Aluminium Die-Cast


Types

Surface

Single Line Diagram

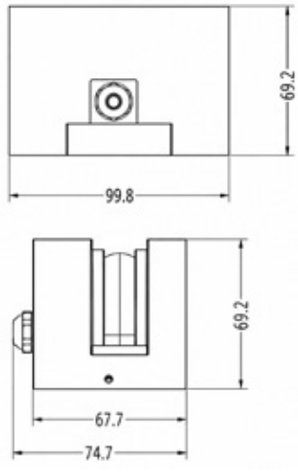


Light Dribution



CRI ≥ 80

SELTOS



System Power	Dimensions
6W	L= 99.8mm, Base W= 67.7mm, H= 69.2mm Curved Dia: 110.0mm
9W	L= 99.8mm, Base W= 67.7mm, H= 69.2mm Curved Dia: 110.0mm
12W	L= 99.8mm, Base W= 67.7mm, H= 69.2mm Curved Dia: 110.0mm

Order Options

CCT (Colour Temperature)

2700K
3000K
4000K
RGB (In 9W)
RGBW (In 12W)

CRI

>80

Beam Angle

90º
180°
360°

Control

Non-Dimmable
Dali-Dimmable

Mounting Type

Surface

Material Colour

RAL as per request