





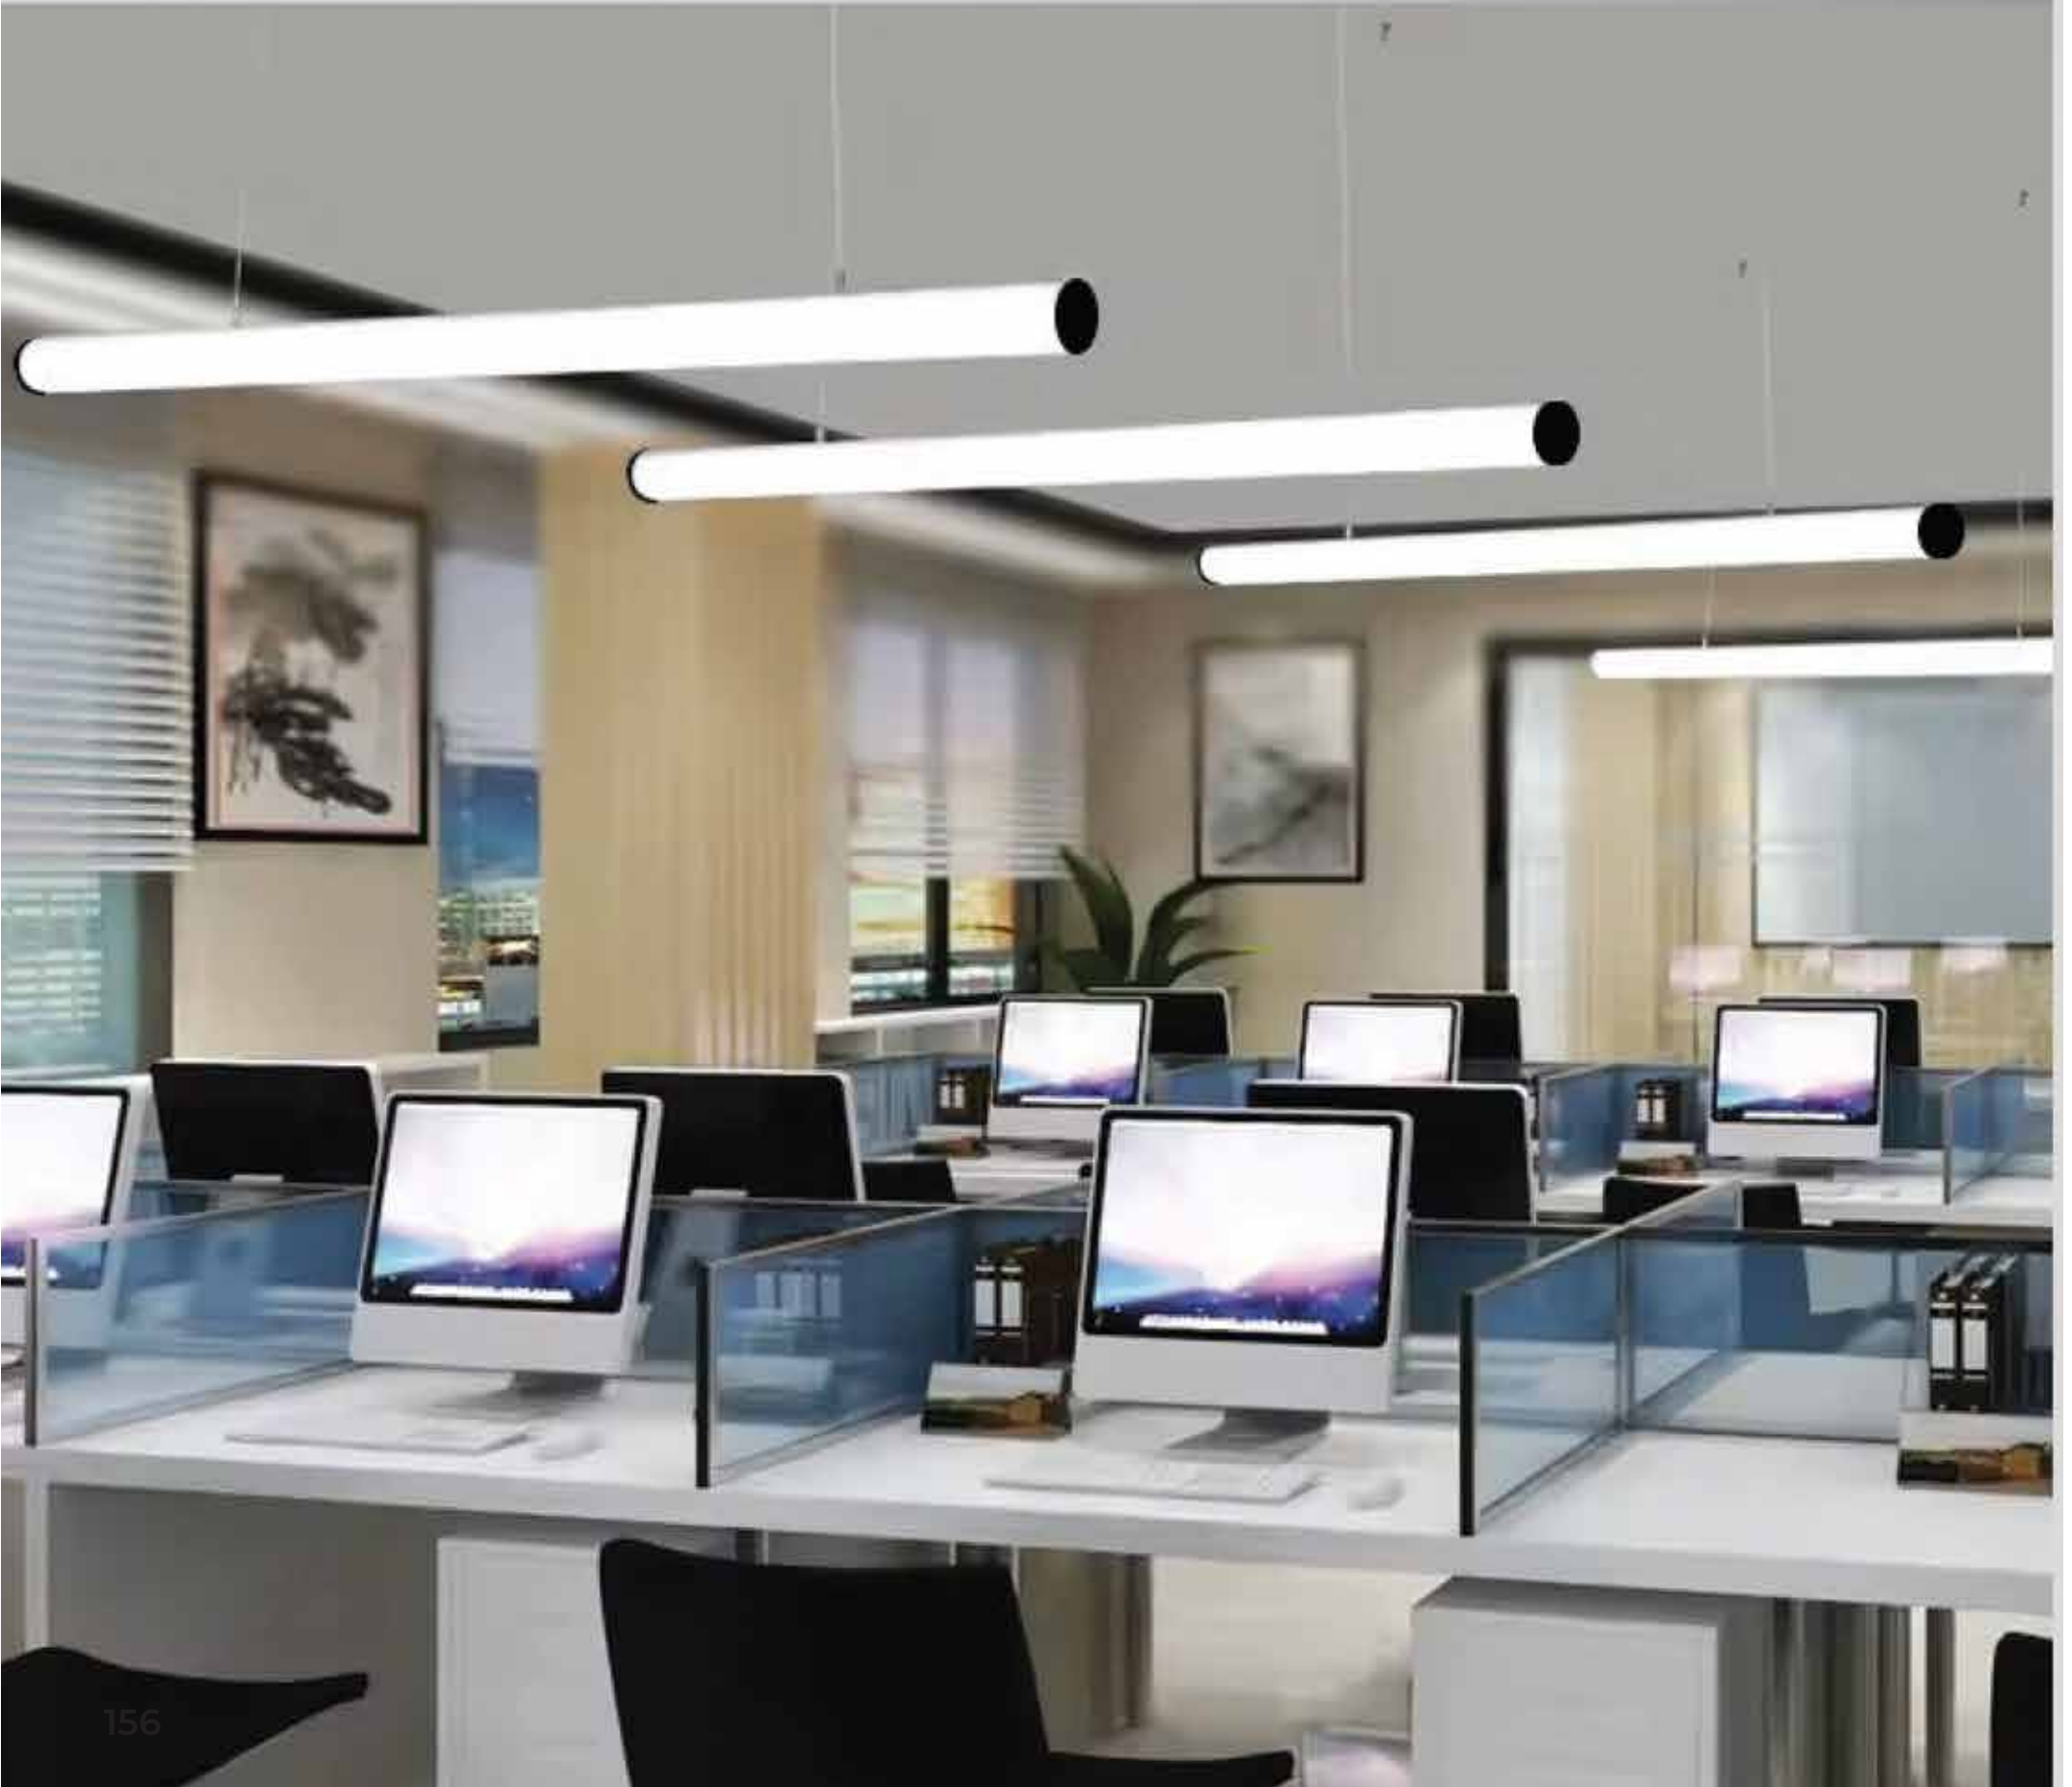

SILIONA 32

divinity lights

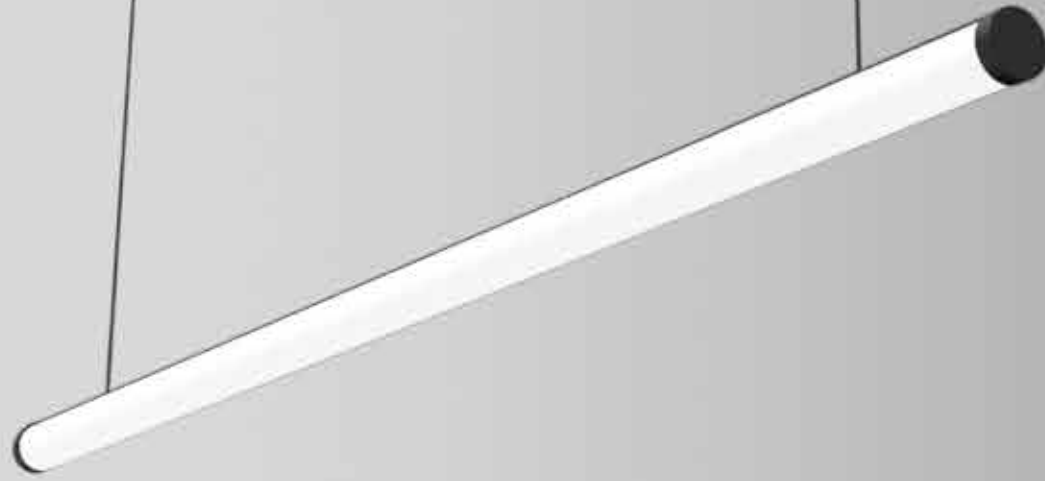

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable White 2700-6500K

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

Silicon Diffuser

L70 @50,000h


Aluminium

Types

Pendant

Single Line Diagram

Profile



Silicon Diffuser




Colours



Light Distribution

Direct



CRI ≥ 90



TUNABLE WHITE 157

SILONA 32

Siliona 32 fixture has:

- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- High efficiency silicon diffuser
- 280 degree uniform light distribution
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Snap-fit system and no visible screw
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

SILIONA 32



SILIONA 32

Product Order Code	System Power	Dimension
1038-  1	5W	L=300mm, Ø 32mm
1038-  2	10W	L=600mm, Ø 32mm
1038-  3	15W	L=900mm, Ø 32mm
1038-  4	20W	L=1200mm, Ø 32mm
1038-  5	40W	L=2400mm, Ø 32mm

Order Options

Distribution

Direct

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4



CRI	
>90	1

Beam Angle


280°

Control		
ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2 DT6		3
DALI-2 DT8		4
DALI +		5

Mounting Type	
Pendant	1

Material Colour	
Black	
White	
Grey	

Accessories

Product Order Code	Accessories Name	Accessories Image
1038-01 	LED PCB	
1038-02	Suspension Wire	
1038-03	Silicon Diffuser	
1038-04	End Cap	

Order Options

CCT (Colour Temperature)		
3000K		1
4000K		2
5700K		3
Tunable White 2700K-6500K		4
CRI		
>90		1