
SPREAD
BOLLARD
divinity lights





SPREAD BOLLARD

Spread Bollard fixture has :

- Luminaire housing of Aluminium
- IP66, High Ingress Protection against dust & moisture
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- Optimum for every outdoor space including society parks, streets, educational institutes, and pathways
- Garden & pathway luminaires create pleasant light distribution with a high degree of visual comfort
- LED bollard, designed to provide radially symmetric light emission of 360°
- Sustainable LED technology offers durability and optimal light output with low power consumption

divinity lights


Quick Info


CRI ≥80
2700K, 3000K, 4000K
Non-Dimmable/ Dali-Dimmable
SDCM<3
Clear Diffuser
L70 @50,000h
Aluminium Die-Cast

Type

Surface

Single Line Diagram

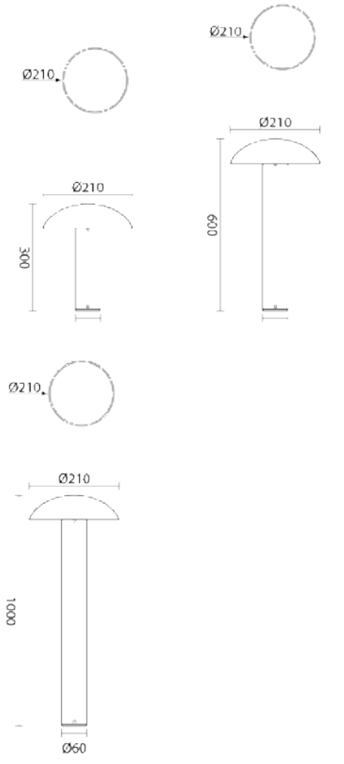




CRI ≥ 80

divinity lights

SPREAD BOLLARD



System Power	Dimensions
10W	Dia=210mm H=300mm
24W	Dia=210mm H=600mm
24W	Dia=210mm H=1000mm

Order Options

CCT (Color Temperature)

2700K

3000K

4000K

CRI

>80

Beam Angle

360º

Control

Non-Dimmable

Dali- Dimmable



Mounting Type

Surface

Material Color

RAL Code As Per Request