STELLAR UP-DOWN
Bollard

divinity lights



CRI ≥ 80

divinity lights









STELLAR UP-DOWN

Stellar Up-Down Bollard has :

- Innovative hollow pattern design with upper and lower light emit ting features. The upper light can illuminate tree crowns, etc., while the lower light can illuminate corridors, etc..Special optical structure, evenly distributed, with good anti glare effect.
- The lamp body has a wall thickness of 2.5mm and a surface cover made of tempered glass IK10 with a thickness of 12mm. It has high impact resistance and corrosion resistance.

Quick Info

CRI ≥ 80

2700K, 3000K, 4000K

30 lm/W

Non Dimmable

SDCM<3

Anti glare Tempered Glass


L70 @50,000h

Aluminium Die Casting

Types


Surface

Single Line Diagram

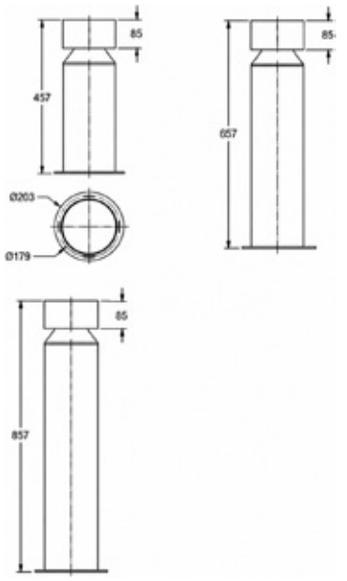

Light Dribution






CRI ≥ 80

divinity lights

STELLAR UP-DOWN



System Power	Dimensions
12W	Dia= 179mm, H= 457/657/857mm
20W	Dia= 179mm, H= 457/657/857mm

Order Options

CCT (Colour Temperature)

2700K

3000K

4000K

CRI

>80

Beam Angle

Up Side- 60°

Down Side- 360°

Control

Non Dimmable

Mounting Type

Surface

Material Colour

RAL as per request