



### Quick Info

CRI ≥ 80 /90

2700K, 3000K, 4000K, RGB

Up to 80 lm/W

Non-Dimmable/ Dali-Dimmable/

DMX Controller

SDCM<3

Transparent Glass


L70 @50,000h

Aluminium Die-Cast

### Types

Surface


### Single Line Diagram

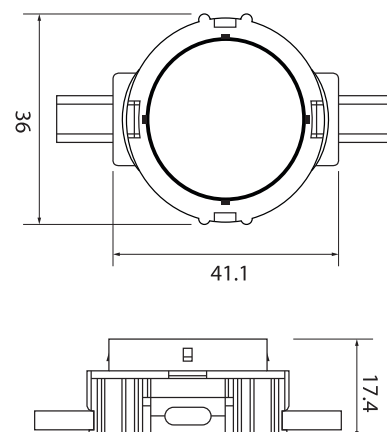

## STERLING 36

Sterling 36 Pixel light has :

- Luminaire housing of Aluminium
- IP66, High Ingress Protection against dust & moisture
- Class 3 electrical safety ensures effective stability of the lamp in
- an outdoor environment for all weather conditions
- Flexible mounting performance for a variety of irregular structures
- Different colour options available including Monocolour, RGB & RGBW
- Suitable for curtain walls, large building displays, decorations,
- 3D shapes, etc.
- Colour resolution of 16 bits
- Anti-shock ability
- Fire protection rating UL94-V0



CRI ≥ 80/90

## STERLING 36



Product Order Code	System Power	Dimensions
1821	1.44W/LED	L=41.1mm, W=36mm, H=17.4mm

## Order Options

## CCT (Colour Temperature)

2700K

3000K

4000K

RGB

## CRI

&gt;80

&gt;90

## Beam Angle

110°

## Control

Non-Dimmable



Dali-Dimmable



DMX Controller



## Mounting Type

Surface

## Material Colour

Black



White

