


TRESTLE

Direct | Surface

TRESTLE

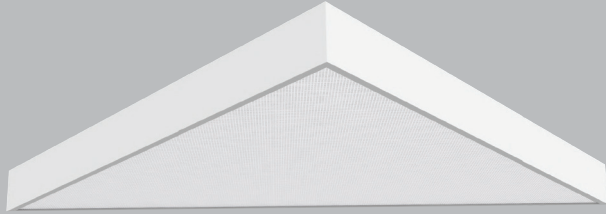

TRESTLE is Full lit geometric Triangle Luminaire with aluminium housing and with premium powder coating finish.

Powered by high quality LED's with a binning tolerance of ≤ 3 SDCM and CRI ≥ 90 . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency Prismatic/ PMMA diffuser provides uniform illumination.


For 600mm Side Triangle

Available in Triangular shape with each side 600mm and height options of 60mm (Driver External) and 95mm (Driver Internal), this fixture is crafted for direct and uniform light distribution making it ideal for professional and decorative applications.

Customisations in RAL finish, Wattages, and Dimensions available as per request to enhance installation and functionality.

Single Line Diagram

Surface

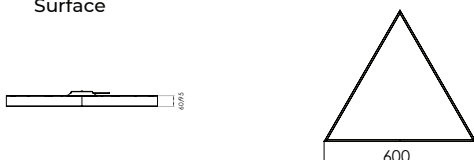

TRESTLE



Quick Info

Mounting Type

Surface

Material Colour

Customize RAL available

Protection mode

IP40

Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

110°

Optics

Opal Diffuser

Micro Prismatic Diffuser

Efficacy

3000K- 88.1

4000K- 101.1

5700K- 115.9

Tunable White 2700K-6500K- 101.1

Electrical

Wattage -35W

Input Voltage- 220-240 VAC

Physical Dimensions

Length- 3x600mm