

URBANA-42 INGROUND LIGHT

divinitylights



Quick Info

CRI ≥ 90

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Tempered Glass





L70 @50,000h

Stainless Steel

Types

Recessed

Single Line Diagram

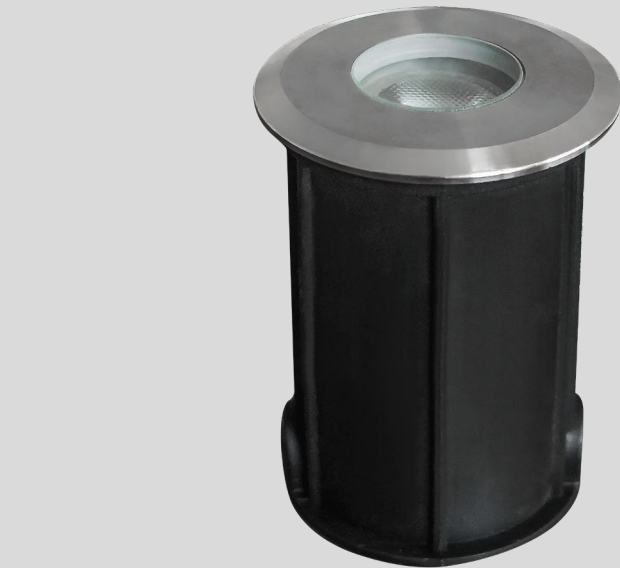


URBANA-42

Urbana-42 Inground Light has:

- Luminaire housing of stainless steel
- IP67, High Ingress Protection against dust & moisture
- Ideal heat dissipation with good quality heat sink
- Beam angle narrow to wide (8° to 60°)
- COB (Chip on Board) technology
- Burial mounting
- Uniform distribution of light in the outdoor environment
- High quality toughened glass to ensure the safety of the fixture

Light Distribution



CRI ≥ 90

URBANA-42



Product Order Code	System Power	Dimensions
1603	2W	Outer Dia=42mm, Cutout Dia=38mm, H=90mm

Order Options

CCT (Colour Temperature)

2700K
3000K
4000K

CRI

>90

Beam Angle

10°
30°
60°

Control

Non-Dimmable
Dali-Dimmable



Mounting Type

Recessed

Material Colour

Stainless Steel

