

URBANA-130

Urbana-130 Inground Light has:

- Luminaire housing of stainless steel
- IP67, High Ingress Protection against dust & moisture
- Ideal heat dissipation with good quality heat sink
- Beam angle narrow to wide (8° to 60°)
- COB (Chip on Board) technology
- Burial mounting
- Uniform distribution of light in the outdoor environment
- High quality toughened glass to ensure the safety of the fixture

Quick Info

CRI ≥ 80/90

2700K, 3000K, 4000K

Up to 85 lm/W

Non-Dimmable/ Dali-Dimmable

SDCM<3

Tempered Glass


L70 @50,000h

Stainless Steel


Types

Recessed

Single Line Diagram

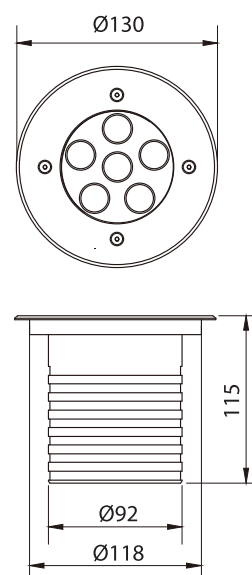

Light Distribution



CRI ≥ 80/90

URBANA-130

Product Order Code	System Power	Dimensions
1606	12W	Outer Dia=130mm, Cutout Dia=118mm, H=115mm

Order Options**CCT (Colour Temperature)**

2700K

3000K

4000K

CRI

>80

>90

Beam Angle

10°

30°

60°

Control

Non-Dimmable



Dali-Dimmable

**Mounting Type**

Recessed

Material Colour

Stainless Steel

