


VIRAJ 100

Direct | Pendant

divinity lights

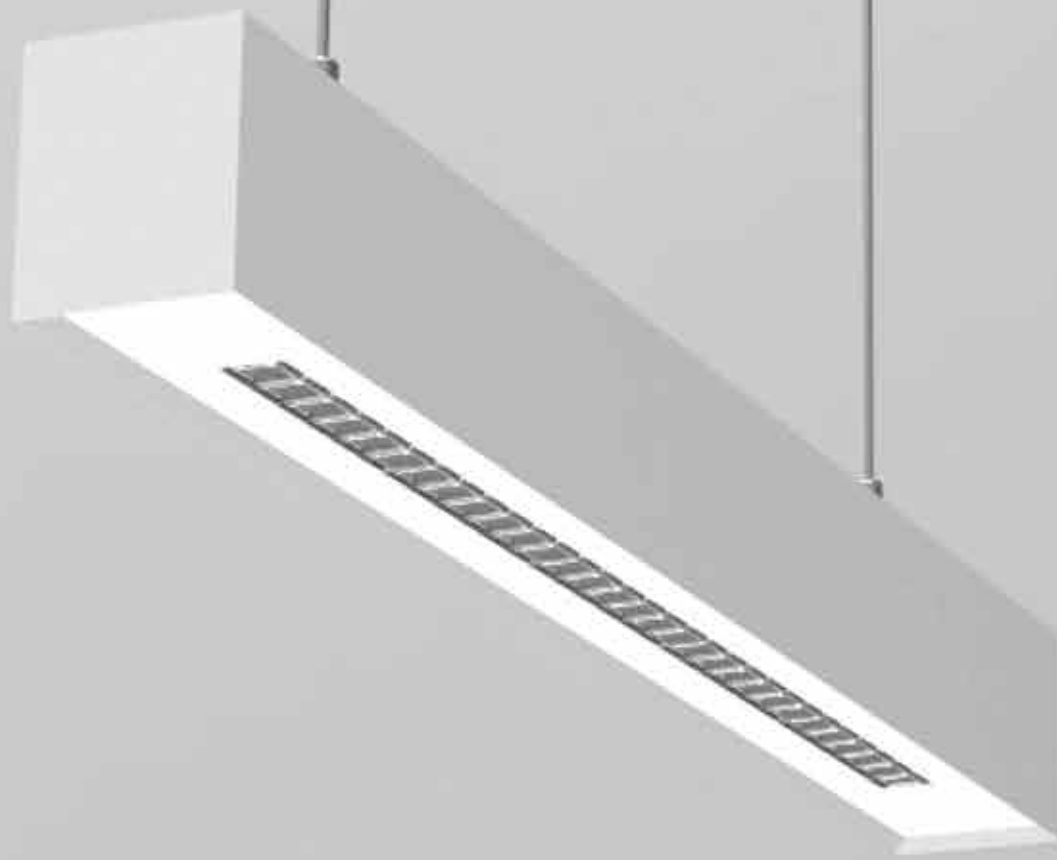

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable White 2700-6500K

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

Dual Optics (Opal/Prismatic Diffuser + Lens)

L70 @50,000h



Aluminium

Types

Pendant

Single Line Diagram

PRODUCT DRAWING

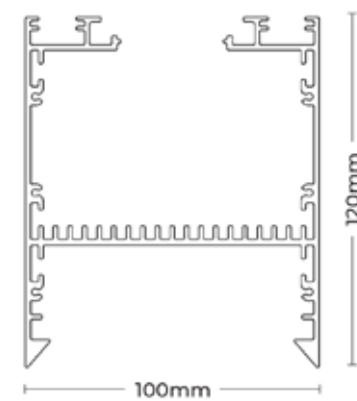

Prismatic Diffuser



Lens



VIRAJ 100 Direct | Pendant

VIRAJ 100 Direct | Pendant has:


- Luminaire housing of extruded aluminium
- Viraj 100 Direct, Direct-Indirect Profile
- Surface powder coated
- LED PCB mounted on insert design with heat sink
- Snap-fit system and no visible screws
- Bottom opening for easy maintenance
- Pendant with cable suspension
- Dual Optics (Opal/Prismatic Diffuser, + Lens)
- Uniform illumination and glare control
- Energy- efficient LED with color rendering

Colours



Light Distribution

Direct Direct-Indirect



CRI ≥ 90



TUNABLE WHITE

VIRAJ 100



VIRAJ 100 (DIRECT)

Product Order Code	System Power	Dimensions
1037-01 □●●■○ 1	30W	L = 600mm W=100mm, H= 120mm
1037-01 □●●■○ 2	60W	L = 1200mm W=100mm, H= 120mm
1037-01 □●●■○ 3	120W	L = 2400mm W=100mm, H= 120mm

Order Options

Distribution ▼

Direct	1
Direct-Indirect	
Up-50% / Down-50%	2
Up-30% / Down-70%	3
Up-70% / Down-30%	4
Up-20% / Down-80%	5
Up-80% / Down-20%	6

CCT (Colour Temperature) ●

3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K 	4

CRI ●

>90	1
-----	---

Beam Angle

Diffused

Control ■

ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2 DT6		3
DALI-2 DT8		4
DALI +		5

Mounting Type

Pendant

Material Colour ○

Black		1
White		2
Grey		3

Accessories

Product Order Code	Accessories Name	Accessories Image
1037-01 	LED PCB	
1037-02	Suspension Wire	
1037-03	Prismatic Diffuser	
1037-04	Opal Diffuser	
1037-05	Profile Endcap	
1037-06 	Lumina Bloon Lens	

Order Options

CCT (Colour Temperature) 	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K 	4
CRI 	
>90	1
Material Colour 	
Black 	1
White 	2
Grey 	3