


VIRAJ 100

Direct | Pendant

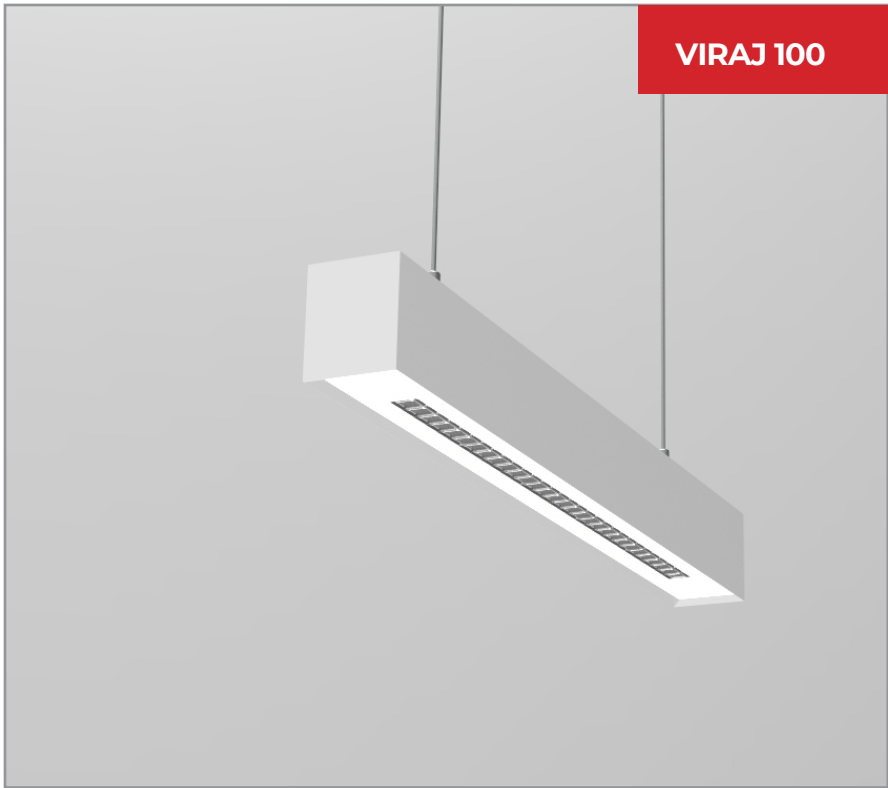

VIRAJ 100 Linear Luminaire with Extruded aluminium housing and with premium powder coating finish.


Powered by high quality LED's with a binning tolerance of ≤ 3 SDCM and CRI ≥ 90 . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. In the middle, high efficiency Lumina Bloon Lens + both side Opal Diffuser and Micro Prismatic diffuser provides glare control and uniform illumination.

With a standard size of 1200 mm length, 120mm height and 100mm width, this fixture is crafted for direct light distribution making it ideal for professional applications.

Customisations in RAL finish, Wattages and Length available as per request to enhance installation and functionality.

Single Line Diagram

Pendant



VIRAJ 100



Quick Info

Mounting Type

Pendant

Material Colour

Customize RAL available

Protection mode

IP40

Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

Diffused

Optics

Lumina Bloom Lens

Opal Diffuser

Micro Prismatic Diffuser

Efficacy

3000K- 94.4

4000K- 110.1

5700K- 124.7

Tunable White 2700K-6500K- 110.1

Electrical

Wattage - 60W/4ft

Opt Wattages Available -30W/4ft, 40W/4ft, 50W/4ft

Input Voltage- 220-240 VAC

Physical

Length- 1200mm

Height- 120mm

Width- 100 mm