

**VIRAJ 45  
RECTANGLE**

**divinity lights**



## Quick Info

CRI  $\geq 90$

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM $<3$

Micro Prismatic Diffuser


L70 @50,000h

Aluminium

## Types

Pendant/ Surface

## Single Line Diagram

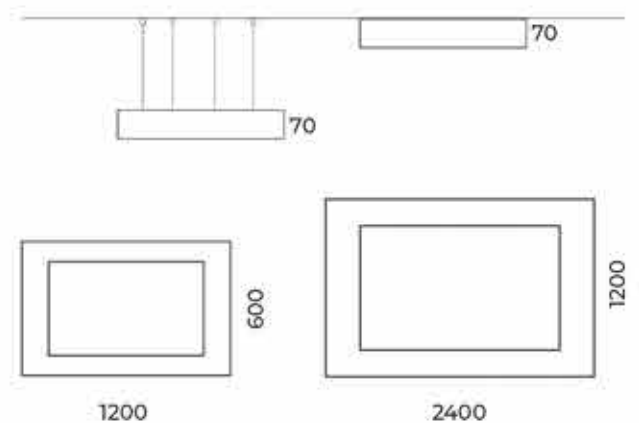

## VIRAJ 45 RECTANGLE

Viraj 45 Rectangle has :

- Rectangle ring with uniform illumination
- Surface powder coated
- Luminaire housing of aluminium
- LED PCB mounted
- Bottom opening for easy maintenance
- Pendant with cable suspension
- Quick mounting system
- M6 bolt for M6 fastener
- High performance Micro Prismatic Diffuser
- Energy-efficient LED with color rendering

## Colours



## Light Distribution

Direct Direct-Indirect



CRI  $\geq 90$



TUNABLE  
WHITE

## VIRAJ 45 RECTANGLE



### VIRAJ 45 RECTANGLE ( DIRECT)

| Product Order Code | System Power | Dimension                                               |
|--------------------|--------------|---------------------------------------------------------|
| 3015-1     1       | 70W          | LXW = 1200mmX600mm<br>Profile<br>W = 46mm,<br>H = 70mm  |
| 3015-1     2       | 105W         | LXW = 2400mmX1200mm<br>Profile<br>W = 46mm,<br>H = 70mm |

### VIRAJ 45 RECTANGLE ( DIRECT-INDIRECT)

| Product Order Code | System Power | Dimension                                               |
|--------------------|--------------|---------------------------------------------------------|
| 3015-     1        | 70W          | LXW = 1200mmX600mm<br>Profile<br>W = 46mm,<br>H = 70mm  |
| 3015-     2        | 105W         | LXW = 2400mmX1200mm<br>Profile<br>W = 46mm,<br>H = 70mm |

## Order Options

| Distribution              |  |   |
|---------------------------|--|---|
| Direct                    |  | 1 |
| Direct-Indirect           |  |   |
| Up-50% / Down-50%         |  | 2 |
| Up-30% / Down-70%         |  | 3 |
| Up-70% / Down-30%         |  | 4 |
| Up-20% / Down-80%         |  | 5 |
| Up-80% / Down-20%         |  | 6 |
| CCT (Colour Temperature)  |  |   |
| 3000K                     |  | 1 |
| 4000K                     |  | 2 |
| 5700K                     |  | 3 |
| Tunable White 2700K-6500K |  | 4 |
| CRI                       |  |   |
| >90                       |  | 1 |
| Beam Angle                |  |   |
| 110°                      |  |   |
| Control                   |  |   |
| ON-OFF                    |  | 1 |
| ON-OFF (FLICKER FREE)     |  | 2 |
| DALI-2 DT6                |  | 3 |
| DALI-2 DT8                |  | 4 |
| DALI +                    |  | 5 |
| Mounting Type             |  |   |
| Pendant                   |  | 1 |
| Surface                   |  | 2 |
| Material Colour           |  |   |
| Black                     |  | 1 |
| White                     |  | 2 |
| Grey                      |  | 3 |

Accessories

| Product Order Code                                                                        | Accessories Name   | Accessories Image                                                                    |
|-------------------------------------------------------------------------------------------|--------------------|--------------------------------------------------------------------------------------|
| 3015-01  | LED PCB            |    |
| 3015-02                                                                                   | Suspension Wire    |    |
| 3015-03                                                                                   | PMMA Diffuser      |   |
| 3015-04                                                                                   | Prismatic Diffuser |  |

Order Options

| CCT (Colour Temperature)  |                                                                                     |  |
|---------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 3000K                     |                                                                                     | 1                                                                                   |
| 4000K                     |                                                                                     | 2                                                                                   |
| 5700K                     |                                                                                     | 3                                                                                   |
| Tunable White 2700K-6500K |  | 4                                                                                   |
| CRI                       |                                                                                     |  |
| >90                       |                                                                                     | 1                                                                                   |