


VIRAJ 5690

DAISY

Direct | Surface

VIRAJ 5690 DAISY

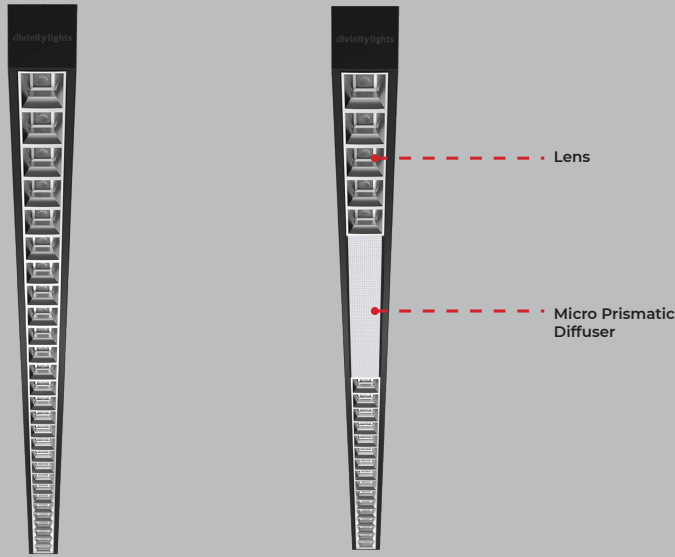

VIRAJ 5690 DAISY LENS

VIRAJ 5690 DAISY
LENS + DIFFUSER

VIRAJ 5690 DAISY Linear Luminaire in a sleek design with a slim Extruded aluminium housing and with premium powder coating finish.


Powered by high-quality LED's with a binning tolerance of ≤ 3 SDCM and $\text{CRI} \geq 90$. The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long-term reliability. High efficiency lens with 3 beam angle options of 30° , 50° and widespread 80°

With a standard size of 1200 mm length, 90 mm height and 56 mm width, this fixture is crafted for direct light distribution making it ideal for professional applications.

Customisations in RAL finish, Wattages, Length and Lens + Prismatic diffuser option available as per request to enhance installation and functionality.

Single Line Diagram

Surface



VIRAJ 5690 DAISY



Quick Info

Mounting Type

Surface

Material Colour

Customize RAL available

Protection mode

IP40

Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

30° / 50° / 80°

Optics

Lens

Prismatic Diffuser

Efficacy

3000K- 111.4

4000K- 124.4

5700K- 140.1

Tunable white 2700K-6500K- 124.4

Electrical

Wattage - 28W/4ft

Opt Wattages Available - 15W/4ft, 20W/4ft, 25W/4ft

Input Voltage- 220-240 VAC

Physical

Length- 1200mm

Height- 90 mm

Width- 56 mm

divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,
Rajasthan 301019.

www.divinitylights.com