


VIRAJ 95 PRISMATIC

Direct | Recessed

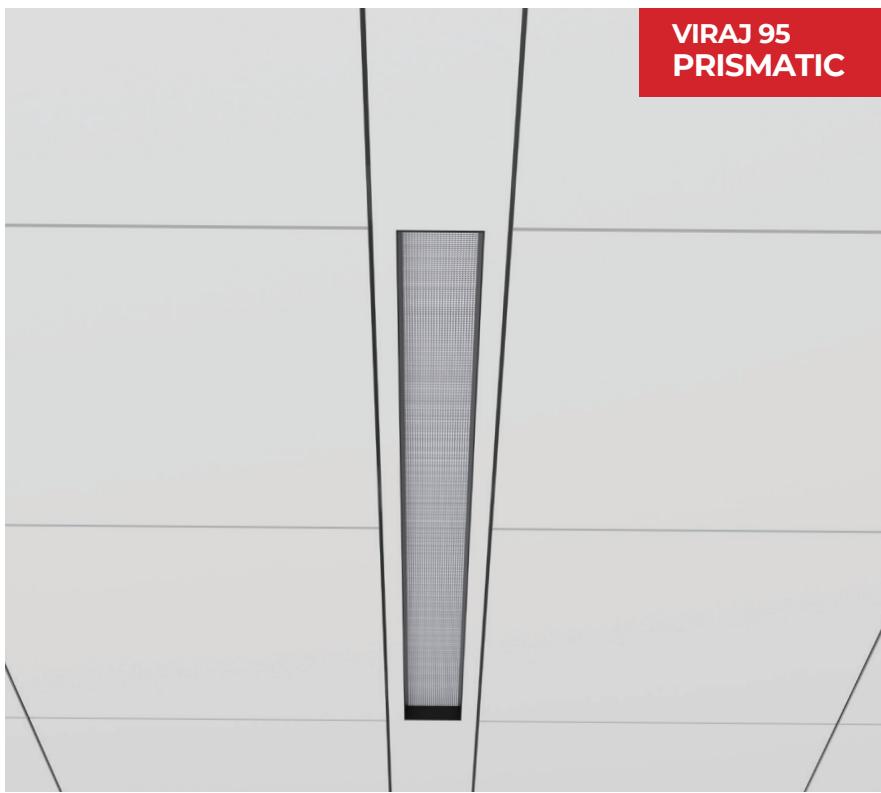

VIRAJ 95
PRISMATIC

VIRAJ 95 PRISMATIC



Quick Info

Mounting Type

Recessed

Material Colour

Customize RAL available

Protection mode

IP40

Driver Details

ON/OFF, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI- \geq 90

Life Span - L70@50000h

MacAdam - \leq 3 SDCM

Beam Angle

110°

Optics

Opal Diffuser

Micro Prismatic Diffuser

Efficacy

3000K- 96.8

4000K- 110.2

5700K- 125.7

Tunable White 2700K-6500K- 110.2

Electrical

Wattage - 28W/4ft

Opt Wattages Available -15W/4ft, 20W/4ft, 25W/4ft

Input Voltage- 220-240 VAC

Physical

Length- 1200mm

Height- 63mm

Width- 95 mm

VIRAJ 95 PRISMATIC Linear Luminaire

in a sleek design with Extruded aluminium housing and with premium powder coating finish.


Powered by high quality LED's with a binning tolerance of \leq 3 SDCM and CRI \geq 90. The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency Micro Prismatic double diffuser provides uniform illumination and reduces glare.

With a standard size of 1200 mm length, 63 mm height and 95 mm width, this fixture is crafted for direct light distribution making it ideal for professional applications.

Customisations in RAL finish, Wattages and Length available as per request to enhance installation and functionality

Single Line Diagram

Recessed



divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

www.divinitylights.com