


## XTO CURVE SOFT

Direct | Recessed



## XTO CURVE SOFT

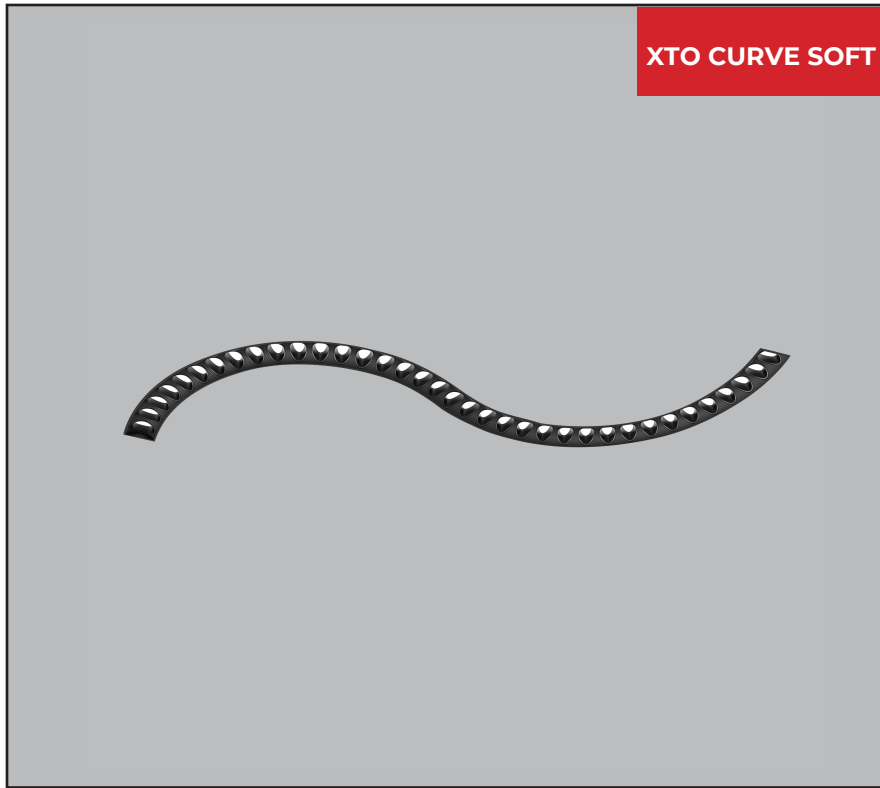

### Quick Info

#### Mounting Type

Pendant

#### Material Colour

Customize RAL available

#### Protection mode

IP40

#### Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

#### LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI-  $\geq 90$

Life Span - L70@50000h

MacAdam -  $\leq 3$  SDCM

#### Beam Angle

67°

#### Optics

Lens

#### Efficacy

3000K- 98.1

4000K- 117.3

5700K- 125.9

Tunable White 2700K-6500K- 117.3

#### Electrical

Wattage -18W

Input Voltage- 220-240 VAC

#### Physical Dimensions

Length- 900mm

Height- 38mm

Width- 34.5mm

**XTO CURVE SOFT** is customised slim curved linear Luminaire with Extruded aluminium housing and with premium powder coating finish..

Powered by high quality LED's with a binning tolerance of  $\leq 3$  SDCM and CRI  $\geq 90$ . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency antiglare optical lens design with uniform illumination and UGR less than 16.

Available as per customised length, 38mm width and 34.5mm height, this fixture is crafted for direct light distribution making it ideal for professional applications.

Customisations in RAL finish, Wattages, Length, Shape available as per request to enhance installation and functionality.

### Single Line Diagram

Recessed

