


XTO CURVE SOFT

Direct | Recessed

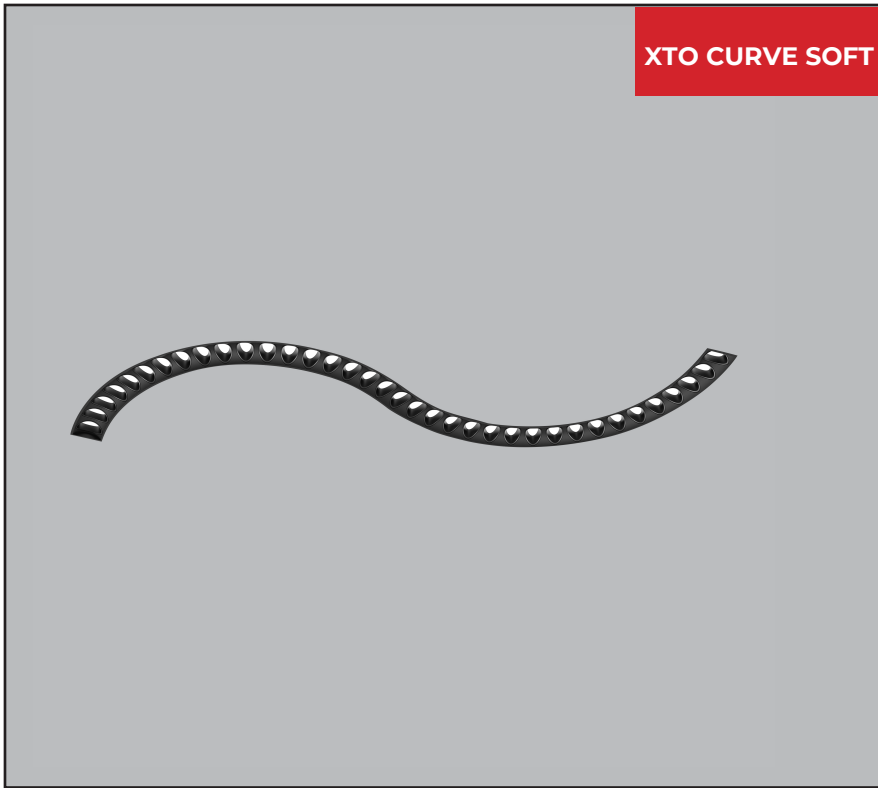

XTO CURVE SOFT is customised slim curved linear Luminaire with Extruded aluminium housing and with premium powder coating finish..


Powered by high quality LED's with a binning tolerance of ≤ 3 SDCM and $\text{CRI} \geq 90$. The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency antiglare optical lens design with uniform illumination and UGR less than 16.

Available as per customised length, 38mm width and 34.5mm height, this fixture is crafted for direct light distribution making it ideal for professional applications.

Customisations in RAL finish, Wattages, Length, Shape available as per request to enhance installation and functionality.

Single Line Diagram

Recessed



XTO CURVE SOFT



Quick Info

Mounting Type

Pendant

Material Colour

Customize RAL available

Protection mode

IP40

Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

67°

Optics

Lens

Efficacy

3000K- 98.1

4000K- 117.3

5700K- 125.9

Tunable White 2700K-6500K- 117.3

Electrical

Wattage -25W

Input Voltage- 220-240 VAC

Physical Dimensions

Length- 1200mm

Height- 38mm

Width- 34.5mm