


# XTO EDGE

Direct | Surface

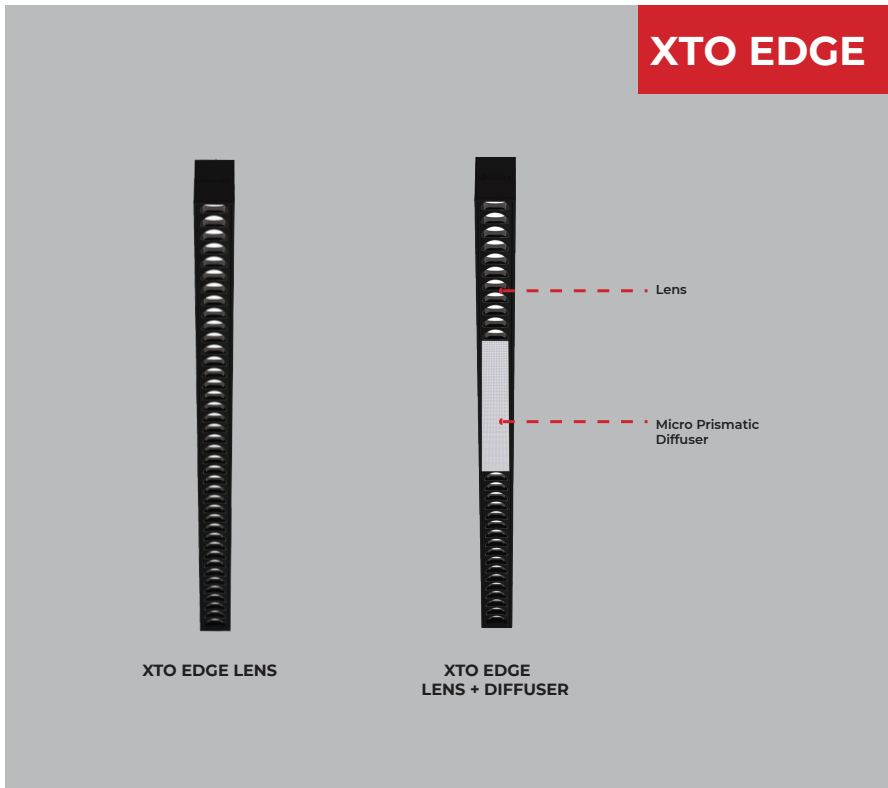

**XTO EDGE** Luminaire in a sleek design with Extruded aluminium housing and with premium powder coating finish and with range of size design solutions.


Powered by high quality LED's with a binning tolerance of  $\leq 3$  SDCM and CRI  $\geq 90$ . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency Micro structure & antiglare optical lens design with uniform illumination and UGR less than 19

With a standard size of 1200 mm length, 64.5mm height and 33mm width **XTO 20**, this fixture is crafted for direct light distribution making it ideal for professional applications. Customisations in RAL finish, Wattages, Length and Lens + Prismatic diffuser option available as per request to enhance installation and functionality.

## Single Line Diagram

Surface

**XTO 20**



## XTO EDGE



## Quick Info

### Mounting Type

Surface

### Material Colour

Customize RAL available

### Protection mode

IP40

### Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

### LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI-  $\geq 90$

Life Span - L70@50000h

MacAdam -  $\leq 3$  SDCM

### Beam Angle

67°

### Optics

Lens

Micro Prismatic Diffuser

### Efficacy

3000K- 92.0

4000K- 102.2

5700K- 114.6

Tunable White 2700K-6500K- 102.2

### Electrical

Wattage - 28W/4ft

Opt Wattages Available -15W/4ft, 20W/4ft, 25W/4ft

Input Voltage- 220-240 VAC

### Physical

Length- 1200mm

Height- 64.5mm

Width- 33mm