


XTO SQUARE

divinity lights

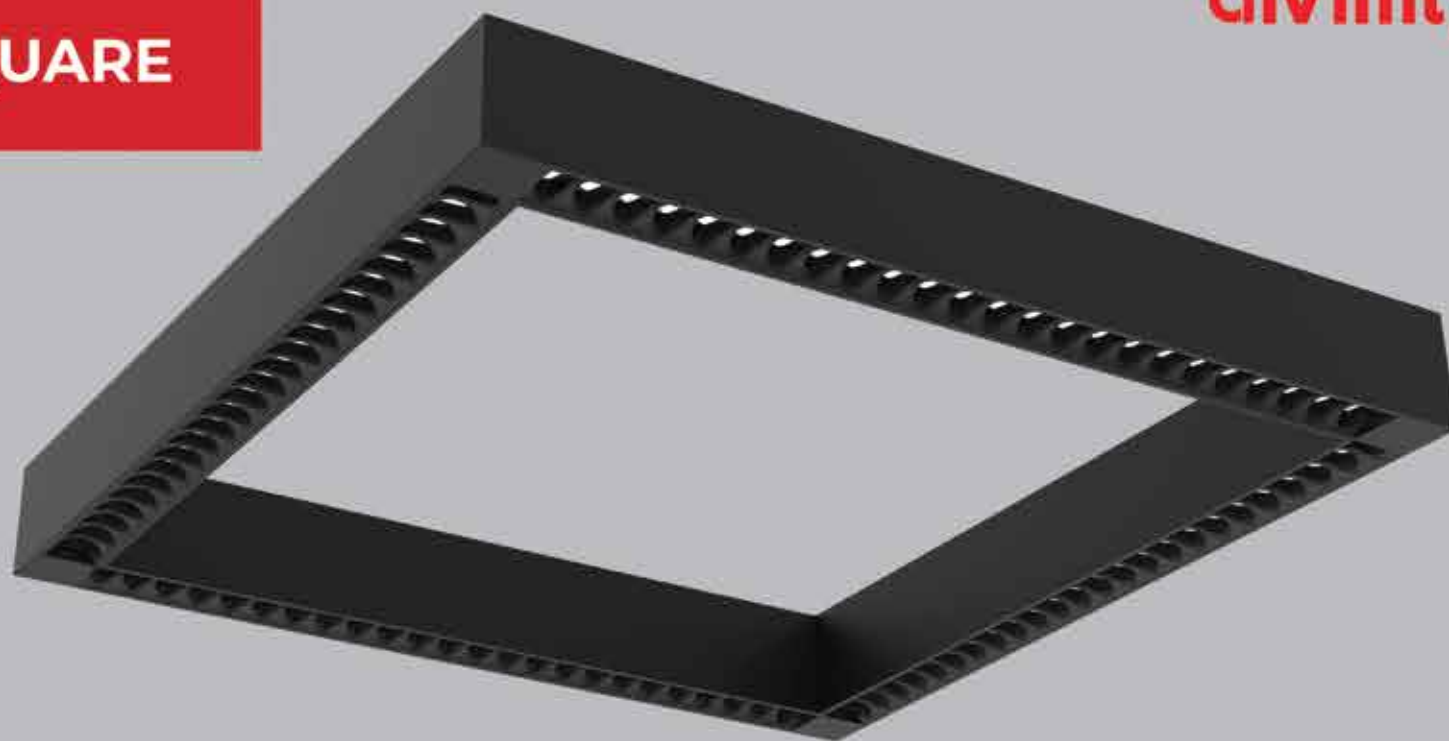

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

Lens

L70 @50,000h





Aluminium

Types

Pendant/ Surface

Single Line Diagram

Pendant/ Surface



XTO SQUARE

XTO Square has :

- Luminaire housing of extruded aluminium
- Range of sizes and angle designs
- Application requirements in different fields
- Surface powder coated
- LED PCB mounted on insert design with heat sink
- Bottom opening for easy maintenance
- Pendant with cable suspension
- M6 bolt for M6 fastener
- Modular design with uniform illumination
- UGR less than 9
- Microstructure anti-glare optical lens
- Energy-efficient LED with color rendering

Colours



Light Distribution

Direct Direct-Indirect



CRI ≥ 90



TUNABLE
WHITE

XTO SQUARE



XTO SQUARE (DIRECT)

Product Order Code	System Power	Dimension
3012-1  1	35W	LXW = 600mmX600mm
3012-1  2	70W	LXW = 1200mmX1200mm
3012-1  3	105W	LXW = 2400mmX2400mm

XTO SQUARE (DIRECT-INDIRECT)

Product Order Code	System Power	Dimension
3012-  1	35W	LXW = 600mmX600mm
3012-  2	70W	LXW = 1200mmX1200mm
3012-  3	105W	LXW = 2400mmX2400mm

Order Options

Distribution	
Direct	1
Direct-Indirect	
Up-50% / Down-50%	2
Up-30% / Down-70%	3
Up-70% / Down-30%	4
Up-20% / Down-80%	5
Up-80% / Down-20%	6
CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4
CRI	
>90	1
Beam Angle	
67°	
Control	
ON-OFF	 1
ON-OFF (FLICKER FREE)	 2
DALI-2 DT6	 3
DALI-2 DT8	 4
Mounting Type	
Pendant	1
Surface	2
Material Colour	
Black	 1
White	 2
Grey	 3
Reflector Option	
XTO 20 (20mm)	1
XTO 25 (25mm)	2
XTO 30 (30mm)	3
XTO 35 (35mm)	4
XTO 40 (40mm)	5
XTO 45 (45mm)	6

Accessories

Product Order Code	Accessories Name	Accessories Image
3012-01 	LED PCB	
3012-02	Suspension Wire	
3012-03 	Black + Black Lens	
3012-04 	Black + Silver Lens	
3012-05 	Chrome + Black Lens	
3012-06 	Black + Gold Lens	

Order Options

CCT (Colour Temperature)		
3000K	1	
4000K	2	
5700K	3	
Tunable White 2700K-6500K	4	
CRI		
>90	1	
Material Colour		
Black	1	
White	2	
Grey	3	
Reflector Option		
XTO 20 (20mm)	1	
XTO 25 (25mm)	2	
XTO 30 (30mm)	3	
XTO 35 (35mm)	4	
XTO 40 (40mm)	5	
XTO 45 (45mm)	6	