

XTREM BENT 165





Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable White 2700-6500K

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

Micro Prismatic Diffuser


L70 @50,000h

Aluminium

Types

Pendant


Single Line

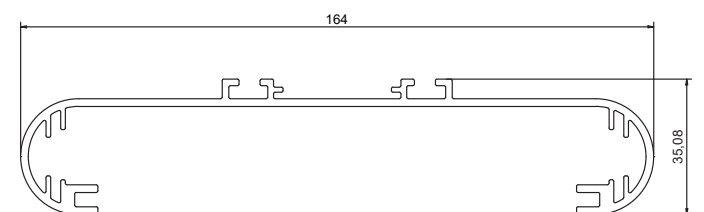

XTREM BENT 165

This fixture has:

- Luminaire housing of extruded aluminium
- Xtreme 165 curve edge profile
- Surface powder coated
- LED PCB mounted on insert design with heat sink
- Snap-fit system and no visible screws
- Bottom opening for easy maintenance
- Pendant with cable suspension
- M6 bolt for M6 fastener
- Double Prismatic double diffuser
- Uniform illumination and glare control
- Energy-efficient LED with color rendering



CRI ≥ 90



TUNABLE
WHITE

XTREM BENT 165



XTREM BENT 165 (DIRECT)

Product Order Code	System Power	Dimension
2010-  1	35W	LXW- 595mmX595mm, H-95mm

XTREM BENT 165 (INDIRECT)

Product Order Code	System Power	Dimension
2010-  1	20W	LXW- 595mmX595mm, H-95mm

Order Options

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4

CRI	
>90	1

Beam Angle

110°

Control	
ON-OFF	1
ON-OFF (FLICKER FREE)	2
DALI-2 DT6 	3
DALI-2 DT6 	4
DALI + 	5

Mounting

Pendant	1
Surface	2
Recessed	3

Material Colour

Black 	1
White 	2
Grey 	3

Accessories

Product Order Code	Accessories Name	Accessories Image
1034-01 	LED PCB	
1034-02	Suspension Wire	
1034-03	PMMA Diffuser	
1034-04	Micro Prismatic Diffuser	
1034-05	Profile Connector	
1034-06 	Profile Endcap	

Order Options

CCT (Colour Temperature)		
3000K	1	
4000K	2	
5700K	3	
Tunable White 2700K-6500K 	4	
CRI		
>90	1	
Material Colour		
Black	1	
White	2	
Grey	3	