


**XTREME 145
ANTIGLARE**

divinity lights

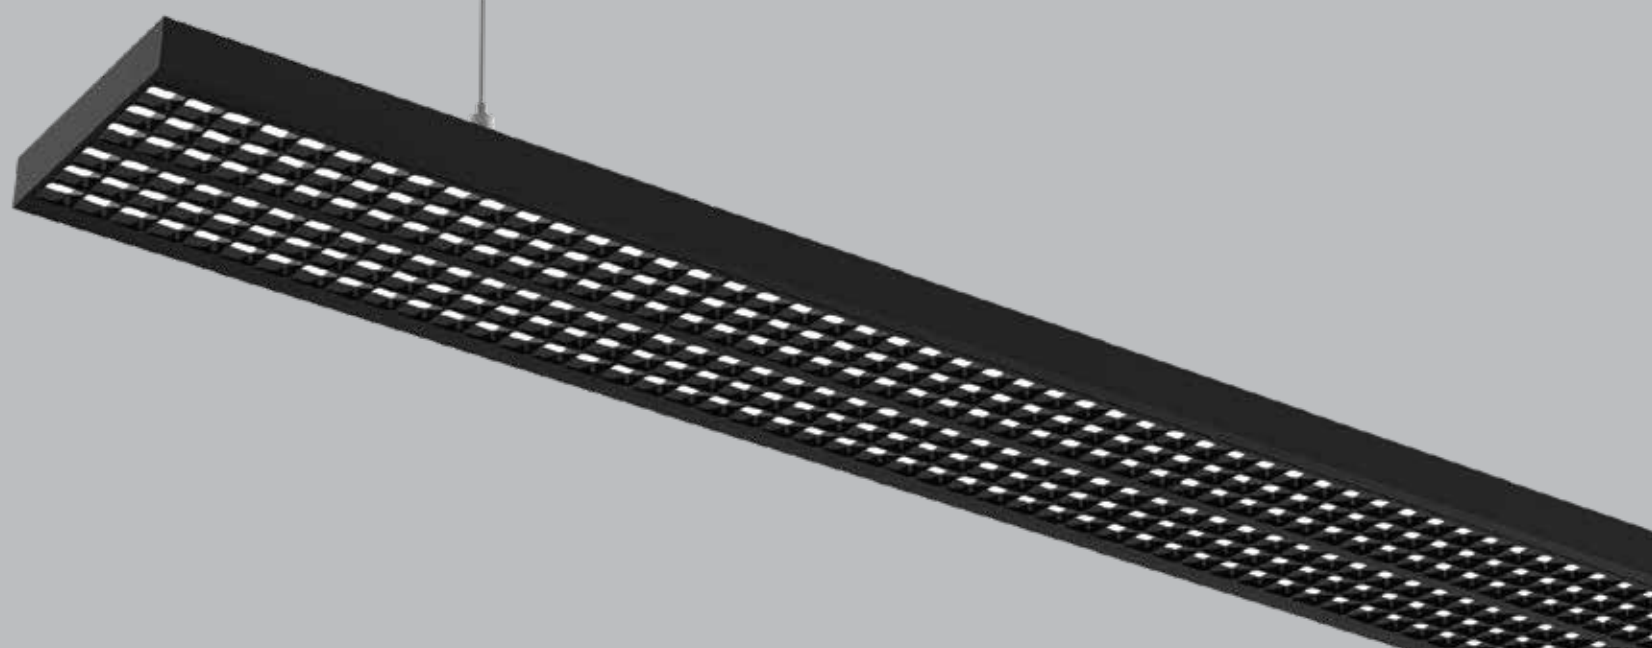

divinity lights

Quick Info

CRI $\geq$ 90

3000K/ 4000K/ 5700K

Tunable White 2700K-6500K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI +

SDCM<3

Antiglare Reflector

L70 @ 50,000h




Aluminium

Types

Pendant/ Recessed

Single Line Diagram

Pendant/ Recessed

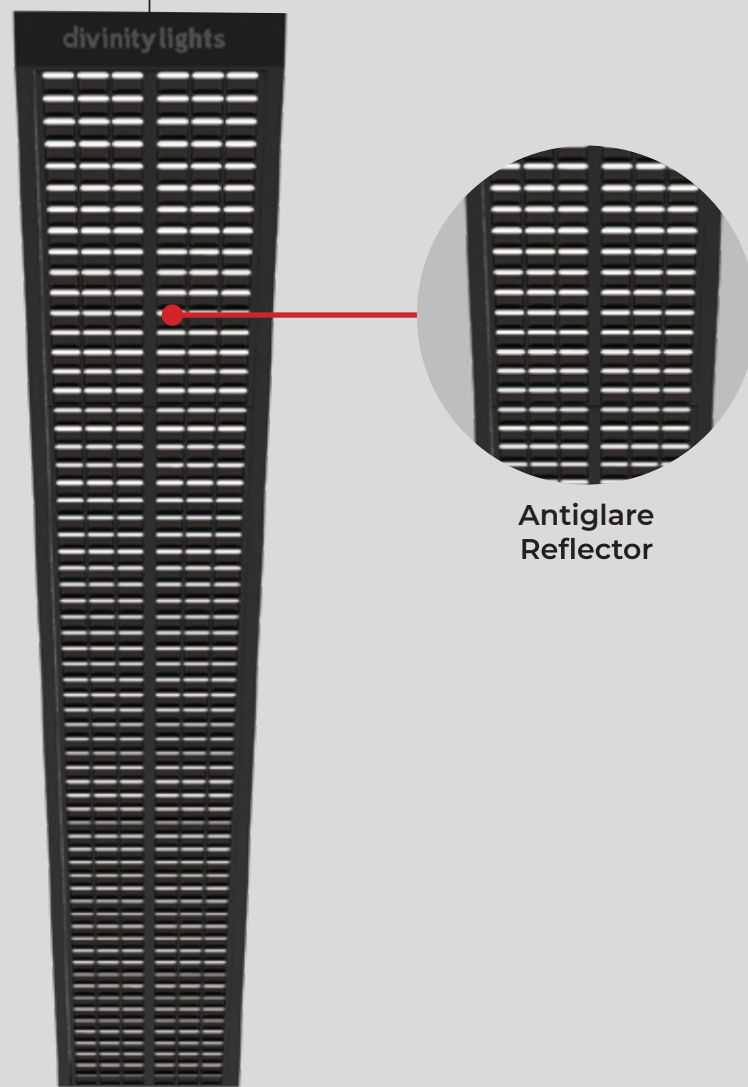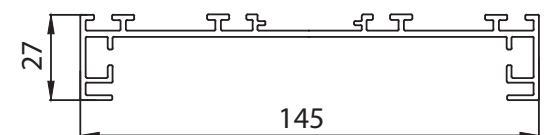

XTREME 145 ANTIGLARE

Xtreme 145 Antiglare linear fixture has:


- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- A new concept on Louver Technology with high glare control
- Uniform illumination
- Visual comfort with panache
- Available in Matt Black, Matt White, Silver & Gun Metal Glossy
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Colours



Light Distribution

Direct Direct-Indirect



CRI $\geq$ 90



TUNABLE WHITE

XTREME 145 ANTIGLARE



XTREME 145 ANTIGLARE (DIRECT)

Product Order Code	System Power	Dimensions
1024-1  1	18W	L = 600mm W=145mm, H = 27mm
1024-1  2	35W	L = 1200mm W=145mm, H = 27mm
1024-1  3	70W	L = 2400mm W=145mm, H = 27mm





XTREME 145 ANTIGLARE (DIRECT-INDIRECT)

Product Order Code	System Power	Dimensions
1024-    1	30W	L = 600mm W=145mm, H = 27mm
1024-    2	50W	L = 1200mm W=145mm, H = 27mm
1024-    3	100W	L = 2400mm W=145mm, H = 27mm

Order Options

Distribution		
Direct	1	
Direct-Indirect		
Up-50% / Down-50%	2	
Up-30% / Down-70%	3	
Up-70% / Down-30%	4	
Up-20% / Down-80%	5	
Up-80% / Down-20%	6	
CCT (Colour Temperature)		
3000K	1	
4000K	2	
5700K	3	
Tunable White 2700K-6500K	 4	
CRI		
>90	1	
Beam Angle		
110°		
Control		
ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2 DT6		3
DALI-2 DT8		4
DALI +		5
Mounting Type		
Pendant	1	
Recessed	2	
Material Colour		
Black		1
White		2
Grey		3

Accessories

Product Order Code	Accessories Name	Accessories Image
1024-01 	LED PCB	
1024-02	Suspension Wire	
1024-03	Matt Black Antiglare	
1024-04	Matt White Antiglare	
1024-05	Silver Antiglare	
1024-06	Gun Metal Glossy Antiglare	
1024-07	Profile Connector	
1024-08 	Profile Endcap	

Order Options

CCT (Colour Temperature)		
3000K		1
4000K		2
5700K		3
Tunable White 2700K-6500K		4
CRI		
>90		1
Material Colour		
Black		1
White		2
Grey		3