


**XTREME 145  
DUO XTD 20**

**divinity lights**

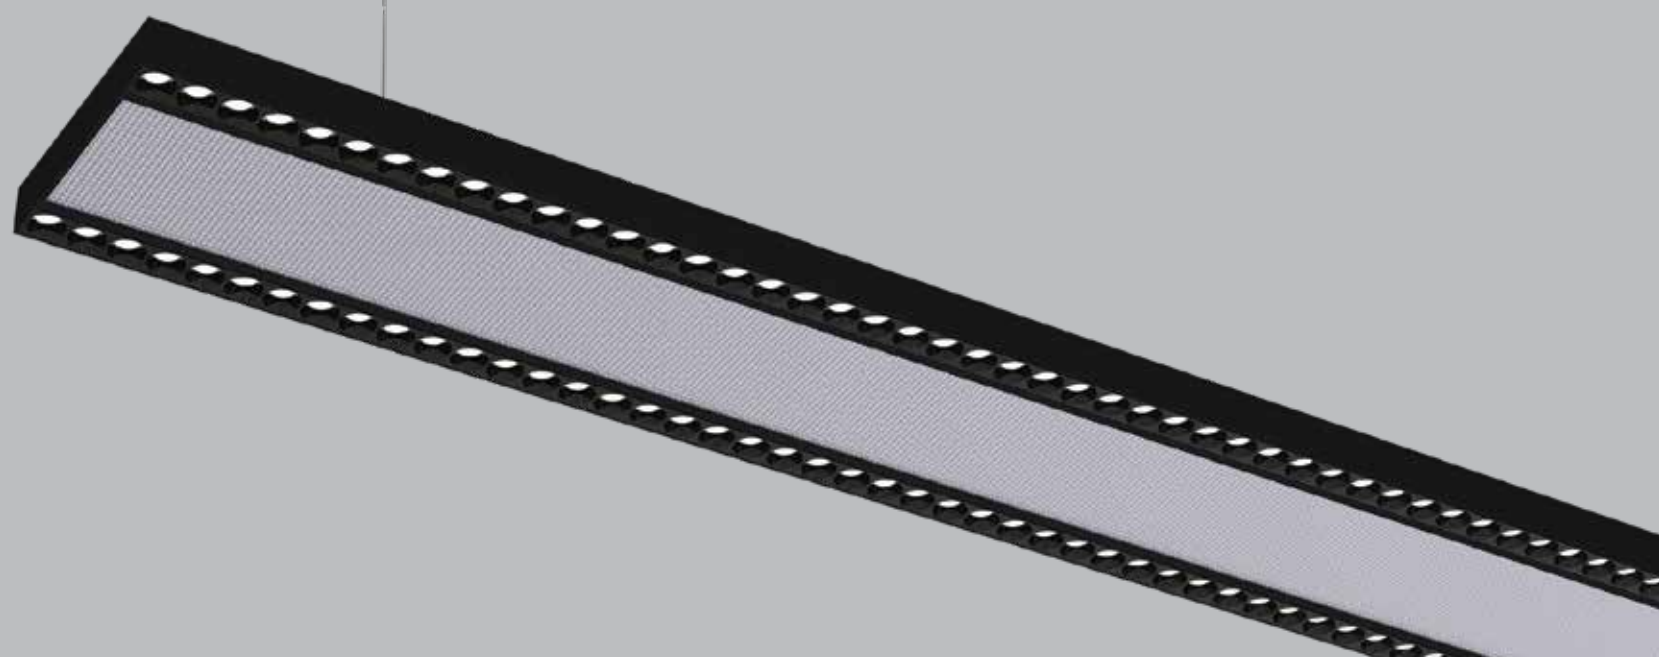

# divinity lights

## Quick Info

CRI  $\geq$  90

3000K/ 4000K/ 5700K

Tunable White (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI +

SDCM<3

Lens + Micro Prismatic Diffuser

L70 @ 50,000h

Aluminium



## Types

Pendant/ Surface/Recessed




## Single Line Diagram

Pendant/ Surface

Recessed

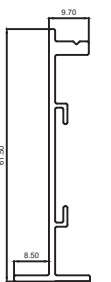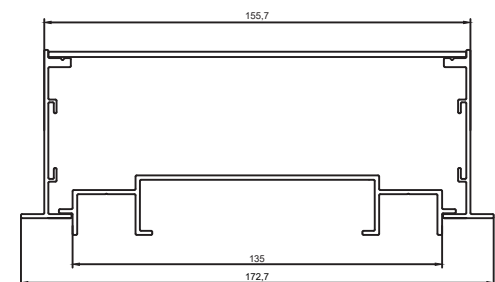

Recessed with frame in Gypsum Ceiling



## XTREME 145 DUO XTD 20

Xtreme 145 DUO XTD 20 has:


- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- Lens + Prismatic double diffuser with Glare control
- uniform illumination
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Recessed mounted with tech zone
- Snap fit system with No visible screw
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

## Colours



## Light Distribution

Direct Direct-Indirect



CRI  $\geq$  90






TUNABLE WHITE




XTREME 145 DUO XTD 20


















XTREME 145 DUO XTD 20 ( DIRECT )

Product Order Code	System Power	Dimensions
1028-1  1	18W	L = 600mm
1028-1  2	35W	L = 1200mm
1028-1  3	70W	L = 2400mm














XTREME 145 DUO XTD 20 ( DIRECT-INDIRECT )

Product Order Code	System Power	Dimensions
1028-  1	25W	L = 600mm
1028-  2	50W	L = 1200mm
1028-  3	100W	L = 2400mm

Order Options

Distribution	
Direct	1
Direct-Indirect	
Up-50% / Down-50%	2
Up-30% / Down-70%	3
Up-70% / Down-30%	4
Up-20% / Down-80%	5
Up-80% / Down-20%	6
CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4
CRI	
>90	1
Beam Angle	
24°	1
50°	2
50°X50°	3
Control	
ON-OFF	 1
ON-OFF (FLICKER FREE)	 2
DALI-2 DT6	 3
DALI-2 DT8	 4
DALI +	 5
Mounting Type	
Pendant	1
Surface	2
Recessed (with frame gypsum ceiling)	3
Material Colour	
Black	 1
White	 2
Grey	 3

Accessories

Product Order Code	Accessories Name	Accessories Image
1028-01 	LED PCB	
1028-02	Suspension Wire	
1028-03	Matt Black Frame	
1028-03	Matt White Frame	
1028-03	24° Lens	
1028-04	50° Lens	
1028-05	50°X50° Lens	
1028-06	PMMA Diffuser	
1028-07	Micro Prismatic Diffuser	
1028-08	Profile Connector	
1028-09 	Profile Endcap	

Order Options


CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



1

2

3

4

CRI

>90

1

Material Colour

Black

White

Grey

1

2

3