


**XTREME 145
PRISMATIC**

divinity lights

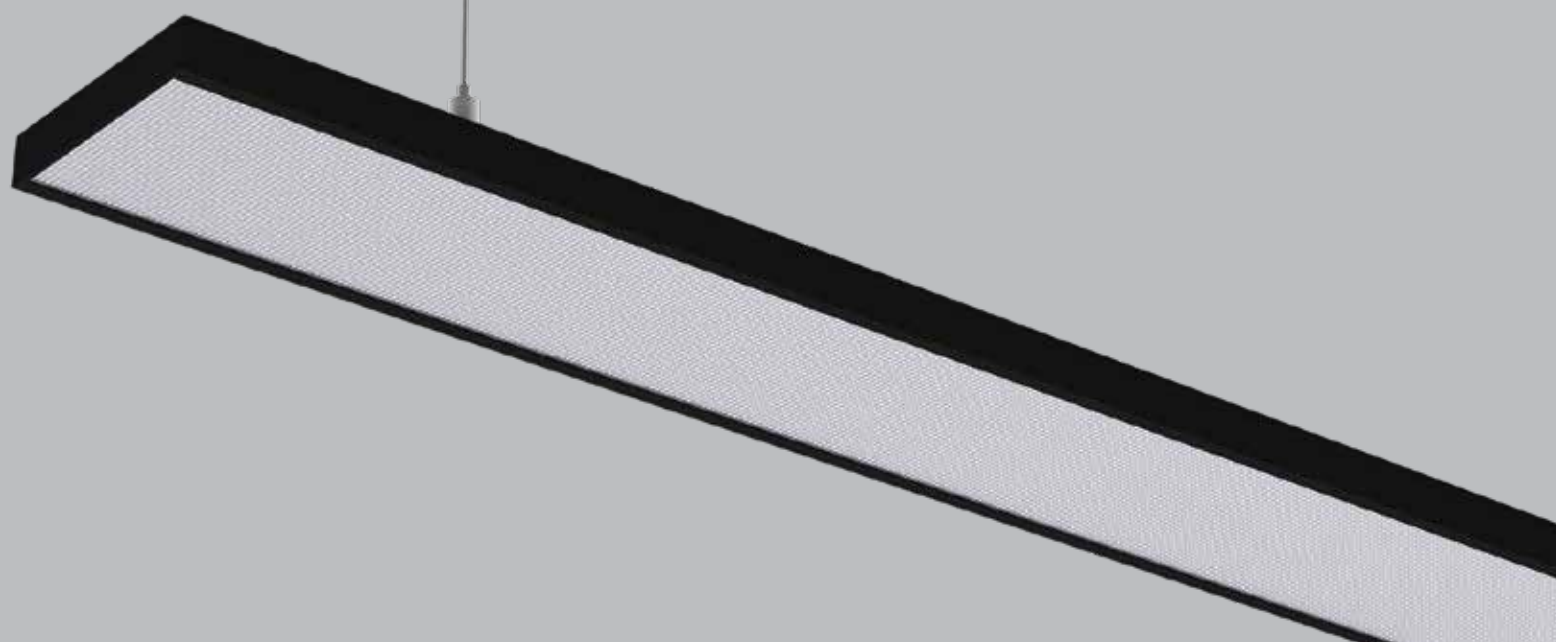

divinity lights

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable White 2700K-6500K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI +

SDCM<3

Micro Prismatic Diffuser

L70 @ 50,000h





Aluminium

Types

Pendant/ Recessed

Single Line Diagram

Pendant/ Recessed

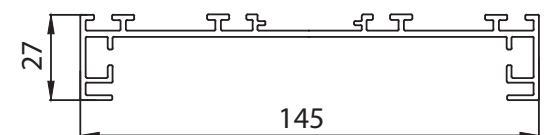

XTREME 145 PRISMATIC

Xtreme 145 Prismatic has :


- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- High performance Prismatic double diffuser
- Glare control & uniform light distribution
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Snap-fit system and no visible screw
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Colours



Light Distribution

Direct Direct-Indirect



CRI ≥ 90



TUNABLE WHITE

XTREME 145 PRISMATIC



XTREME 145 PRISMATIC (DIRECT)

Product Order Code	System Power	Dimensions
1026-1  1	18W	L = 600mm W=145mm, H = 27mm
1026-1  2	35W	L = 1200mm W=145mm, H = 27mm
1026-1  3	70W	L = 2400mm W=145mm, H = 27mm

XTREME 145 PRISMATIC (DIRECT-INDIRECT)

Product Order Code	System Power	Dimensions
1026-  1	30W	L = 600mm W=145mm, H = 27mm
1026-  2	50W	L = 1200mm W=145mm, H = 27mm
1026-  3	100W	L = 2400mm W=145mm, H = 27mm

Order Options

Distribution	
Direct	1
Direct-Indirect	
Up-50% / Down-50%	2
Up-30% / Down-70%	3
Up-70% / Down-30%	4
Up-20% / Down-80%	5
Up-80% / Down-20%	6
CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	 4
CRI	
>90	1
Beam Angle	
110°	
Control	
ON-OFF	 1
ON-OFF (FLICKER FREE)	 2
DALI-2 DT6	 3
DALI-2 DT8	 4
DALI +	 5
Mounting Type	
Pendant	1
Recessed	2
Material Colour	
Black	 1
White	 2
Grey	 3

Accessories

Product Order Code	Accessories Name	Accessories Image
1026-01 	LED PCB	
1026-02	Suspension Wire	
1026-03	PMMA Diffuser	
1026-04	Micro Prismatic Diffuser	
1026-05	Profile Connector	
1026-06 	Profile Endcap	

Order Options

CCT (Colour Temperature)		
3000K		1
4000K		2
5700K		3
Tunable White 2700K-6500K		4
CRI		
>90		1
Material Colour		
Black		1
White		2
Grey		3