

XTREM BENT 165

Direct | Pendant



XTREM BENT 165 Linear Luminaire with Extruded aluminium housing and with premium powder coating finish.


Powered by high quality LED's with a binning tolerance of ≤ 3 SDCM and CRI ≥ 90 . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency Double Micro Prismatic diffuser provides glare control and uniform illumination.

With a standard size of 1200mm length, 164mm Width, 35.08mm Height, both side light distribution Down 35W, Up 20W/4ft this fixture is crafted for direct light distribution, direct-indirect distribution making it ideal for professional applications.

Customisations in RAL finish, Wattages and Length available as per request to enhance installation and functionality.

Single Line Diagram

Pendant

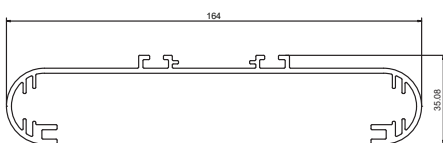

XTREME BENT 165



Quick Info

Mounting Type

Pendant

Material Colour

Customize RAL available

Protection mode

IP40

Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

110°

Optics

Opal Diffuser

Micro Prismatic Diffuser

Efficacy

3000K- 98.5

4000K- 112.2

5700K- 125.5

Tunable White 2700K-6500K- 112.2

Electrical

Wattage - 35W/4ft

Direct-Indirect -Down 35W up Side 20W /4ft

Input Voltage- 220-240 VAC

Physical Dimensions

Length- 1200mm

Width- 164mm

Height- 35.08mm