


divinitylights


STREET LIGHT

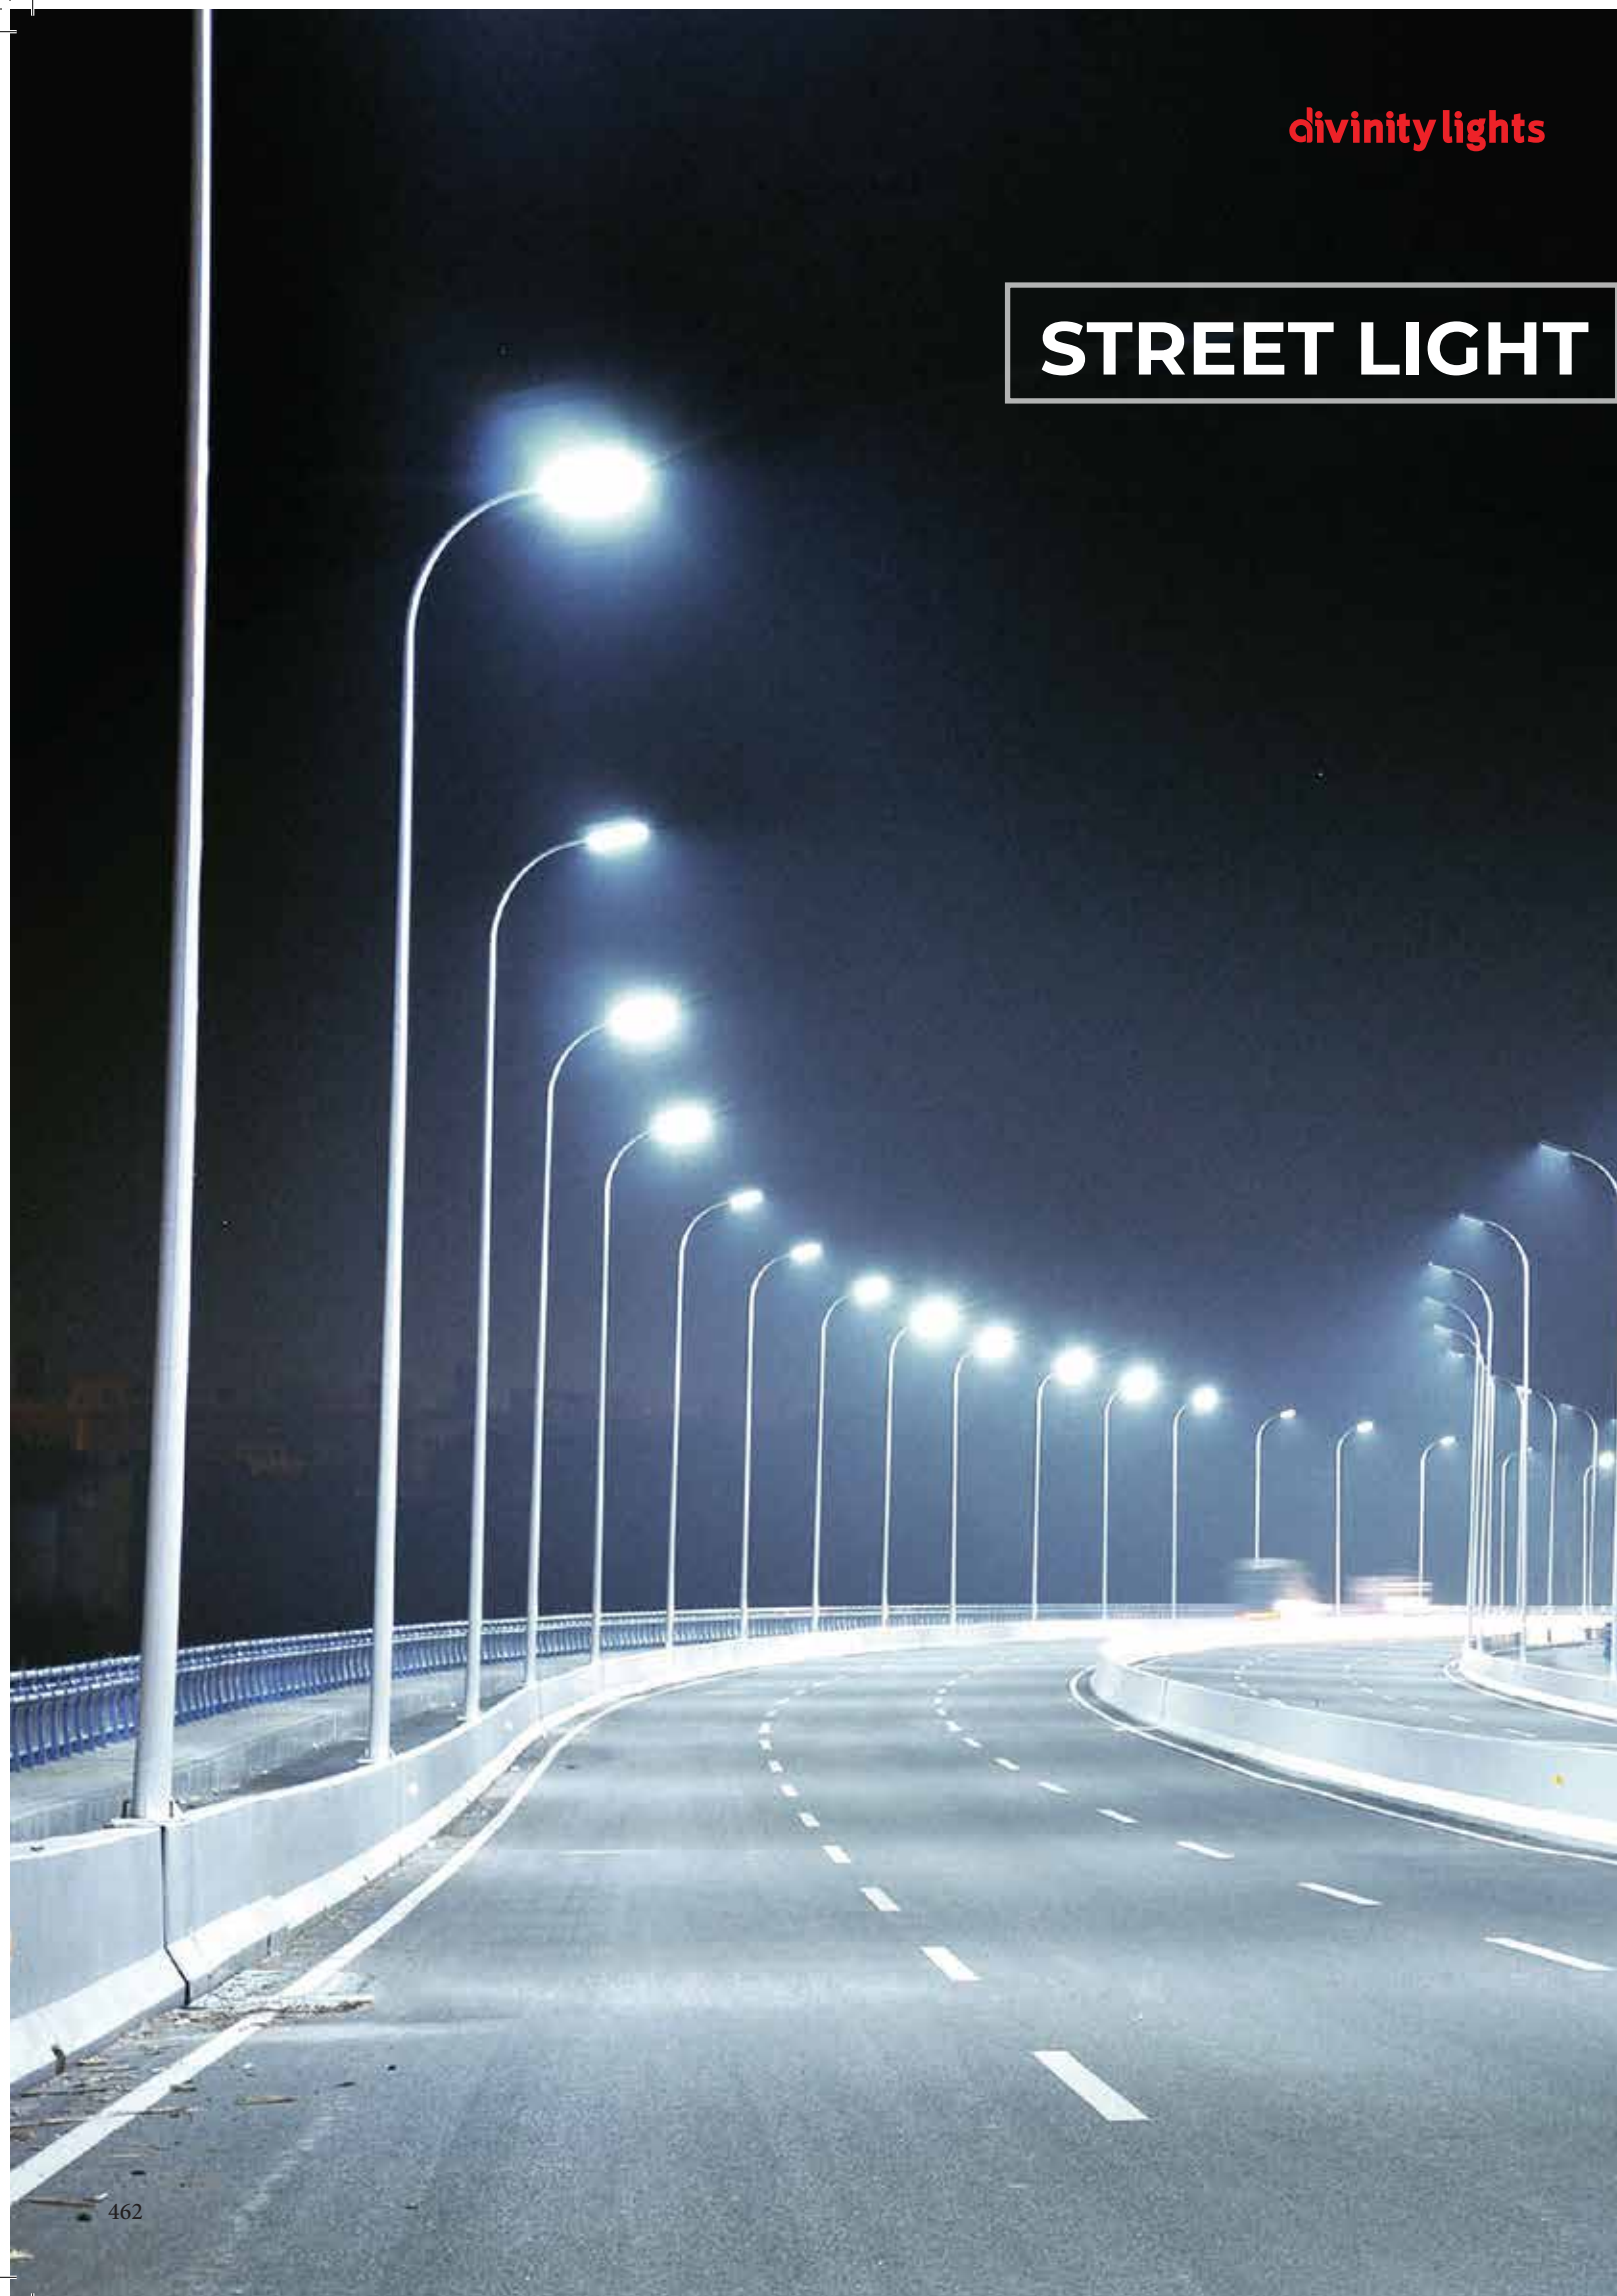

ZENEX
STREET LIGHT

divinitylights



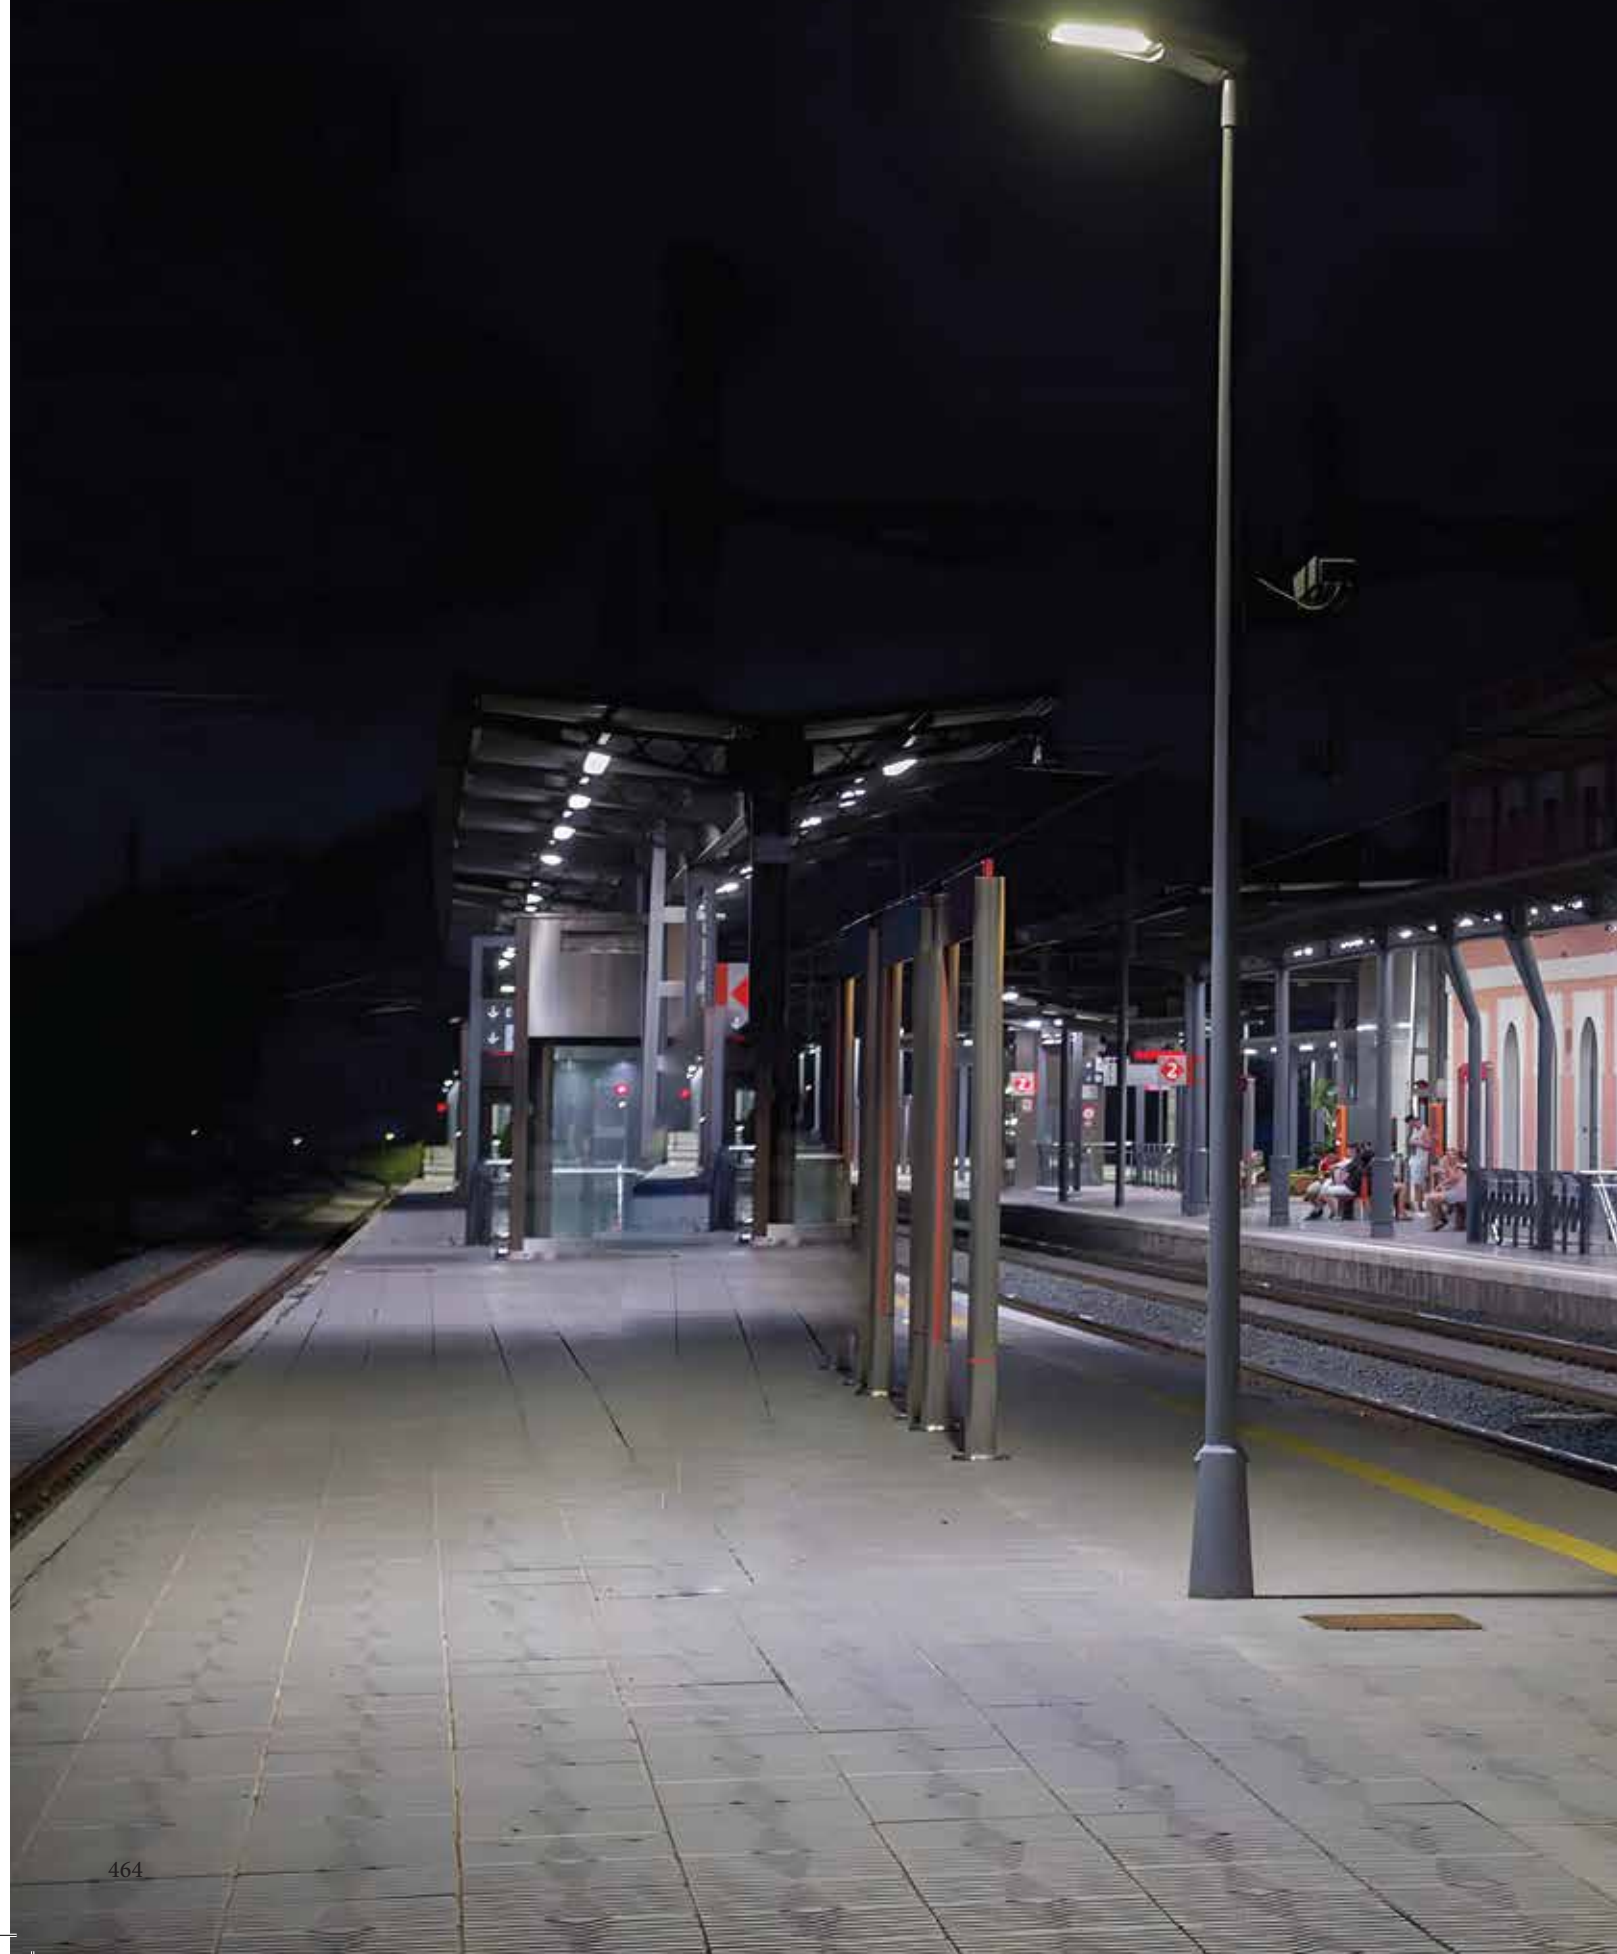



ZENEX STREET LIGHT

Zenex Street light fixture has :

- High grade Aluminium die-casting housing for heavy-duty outdoor lighting applications
- IP67 rated fixture protects from dust and harsh weather
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- High efficiency polycarbonate UV stabilised cover with integrated lens to ensure symmetrical batwing light distribution
- Suitable for pole mounting
- Thermal efficient casting
- Integral heat sink design increases air flow velocity, providing maximum passive thermal management
- High quality toughened glass

Quick Info

CRI ≥ 90

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Tempered Glass




L70 @50,000h

Aluminium Die-Cast

Types


Pole Mounted

Single Line Diagram



Light Distribution

Direct



CRI ≥ 90

ZENEX STREET LIGHT



Product Order Code	System Power	Dimensions
1900	60W	L=668mm,W=249mm H=145mm
1901	80W	L=668mm,W=249mm H=145mm
1902	100W	L=740mm,W=299mm H=145mm
1903	200W	L=804mm,W=347mm H=145mm

Order Options

CCT (Colour Temperature)

2700K
3000K
4000K

CRI

>90

Beam Angle

Street Optics

Control

Non-Dimmable
Dali-Dimmable



Mounting Type

Pole Mounted

Material Colour

Grey