


ELLIS

divinity lights

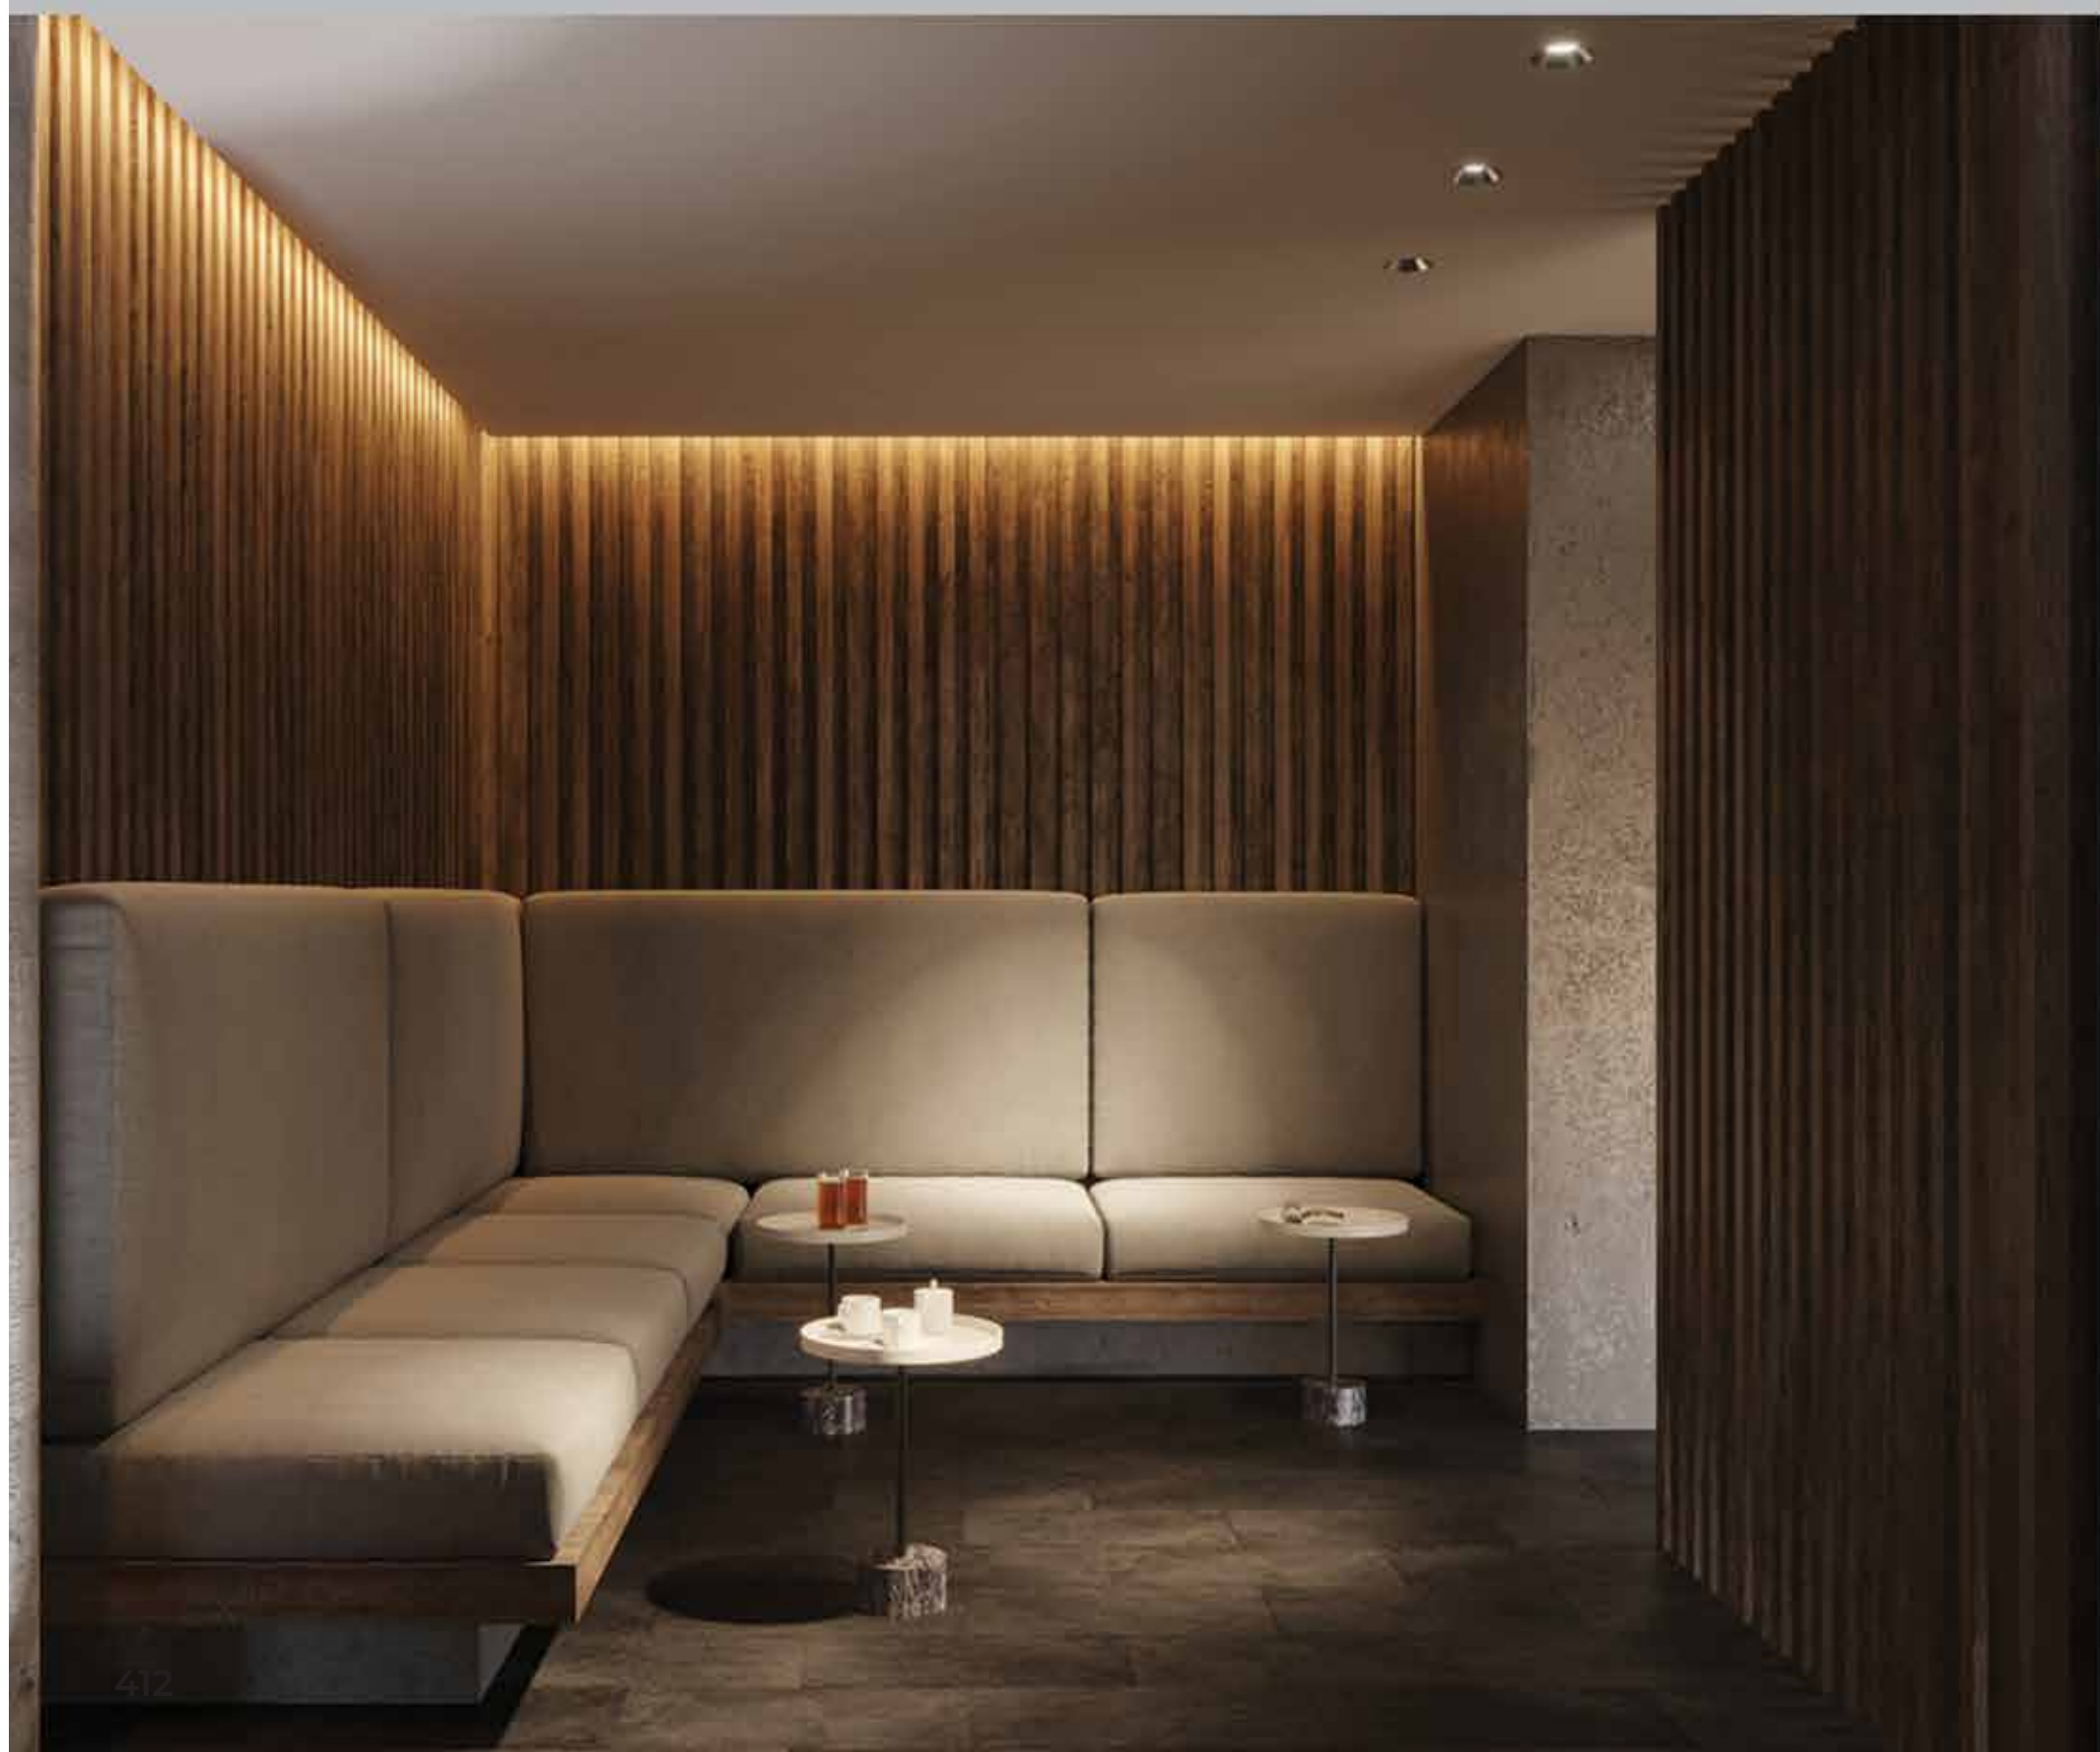

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

Lens & Refelctor

L70 @50,000h


Aluminium Die-cast

Types

Recessed

Single Line Diagram


VANIC 45




VANIC 55



VANIC 65



VANIC 75




ELLIS

Ellis fixture has :

- Die cast- aluminium Luminaire housing
- Premium powder coated finish
- COB (Chip on Board) technology
- Available in Adjustable & Fixed version
- LED with effective colour rendering
- Precision-engineered, electroplated and nano-plated reflector
- Reflector cover available in 4 colours
- Zero multiple shadows

Light Distribution

Direct



CRI ≥ 90



TUNABLE
WHITE

ELLIS



ELLIS 45

Product Order Code	System Power	Dimension
4004-  1	6W	Outer Dia = 52mm, Cutout Dia = 45mm, H = 72mm

ELLIS 55

Product Order Code	System Power	Dimension
4004-  2	9W	Outer Dia = 62mm, Cutout Dia = 55mm, H = 77mm

ELLIS 65

Product Order Code	System Power	Dimension
4004-  3	12W	Outer Dia = 73mm, Cutout Dia = 65mm, H = 80mm

ELLIS 75

Product Order Code	System Power	Dimension
4004-  4	15W	Outer Dia = 84mm, Cutout Dia = 75mm, H = 85mm

Order Options

Distribution

Direct

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4

CRI	
>90	1

Beam Angle	
12°	1
24°	2
36°	3
50°	4

Control		
ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2 DT6		3
DALI-2 DT8		4
DALI +		5

Mounting Type

Recessed

Reflector Finish		
Black Reflector		01
White Reflector		02
Silver Reflector		03

Accessories

Product Order Code	Accessories Name	Accessories Image
4004-01 	COB	
4004- 	Reflectors	

Order Options

CCT (Colour Temperature)

3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K 	4

CRI

>90	1
-----	---

Reflector Finish

Black Reflector		01
White Reflector		02
Silver Reflector		03